



# Bridgelux® Gen 8 Vero® SE 13 Array

Product Data Sheet DS431



# Introduction

Vero SE



The Vero® SE Series is a revolutionary light source system that integrates Bridgelux's eighth generation COB technology with poke-in connectivity, enabling solder-free installation. Vero SE LED light sources streamline assembly processes, lower manufacturing costs, simplify the luminaire design process, improve light quality, and increase design flexibility.

Vero SE is available in four different light emitting surface (LES) configurations that operate reliably over a broad current range. With Vero SE, secondary connector and holder components are not required, allowing for rapid integration of arrays into fixtures, and an efficient field replaceable solution. Vero SE arrays deliver increased lumen density for improved beam control and precision lighting, with 2 and 3 SDCM color control standards for clean and consistent uniform lighting.

## Features

- Poke-in electrical connectivity
- Top side part number markings
- Efficacy of 175 lm/W typical, 3000K 80 CRI
- Reliable operation at up to 3x nominal current, 30% increase in maximum lumens per LES size
- Wide selection of CCT options (2700K-6500K) with minimum 70, 80 and 90 CRI options
- Uniform high-quality illumination
- 2 and 3 SDCM binning options (2700K – 4000K)
- Forward voltage bin codes (backside marking)
- 10-Year warranty

## Benefits

- Low cost, solderless, connector free installation and field upgradability
- Improved inventory management and quality control
- Enables high efficiency lighting systems and lower operating costs
- Supports the trend toward luminaire miniaturization and delivers enhanced optical control
- Design flexibility for a broad range of lighting applications
- Clean white light without pixelation
- Uniform consistent white light
- Design flexibility for multi-source applications
- Design with confidence




# Contents

Product Feature Map	2
Product Nomenclature	2
Product Selection Guide	3
European Product Registry for Energy Labeling	7
Performance at Commonly Used Drive Currents	10
Electrical Characteristics	20
Eye Safety	21
Absolute Maximum Ratings	22
Performance Curves	23
Typical Radiation Pattern	25
Typical Color Spectrum	26
Mechanical Dimensions	27
Color Binning Information	28
Packaging and Labeling	29
Design Resources	31
Precautions	31
Disclaimers	31
About Bridgelux	32

# Product Feature Map


Vero SE 13 is the second smallest form factor in the product family of the next generation solid state light sources. In addition to delivering the performance and light quality required for many lighting applications, Vero

SE incorporates several features to simplify the design integration and manufacturing process, accelerate time to market and reduce system costs. Please visit [www.bridgelux.com](http://www.bridgelux.com) for more information on the Vero SE family of products.

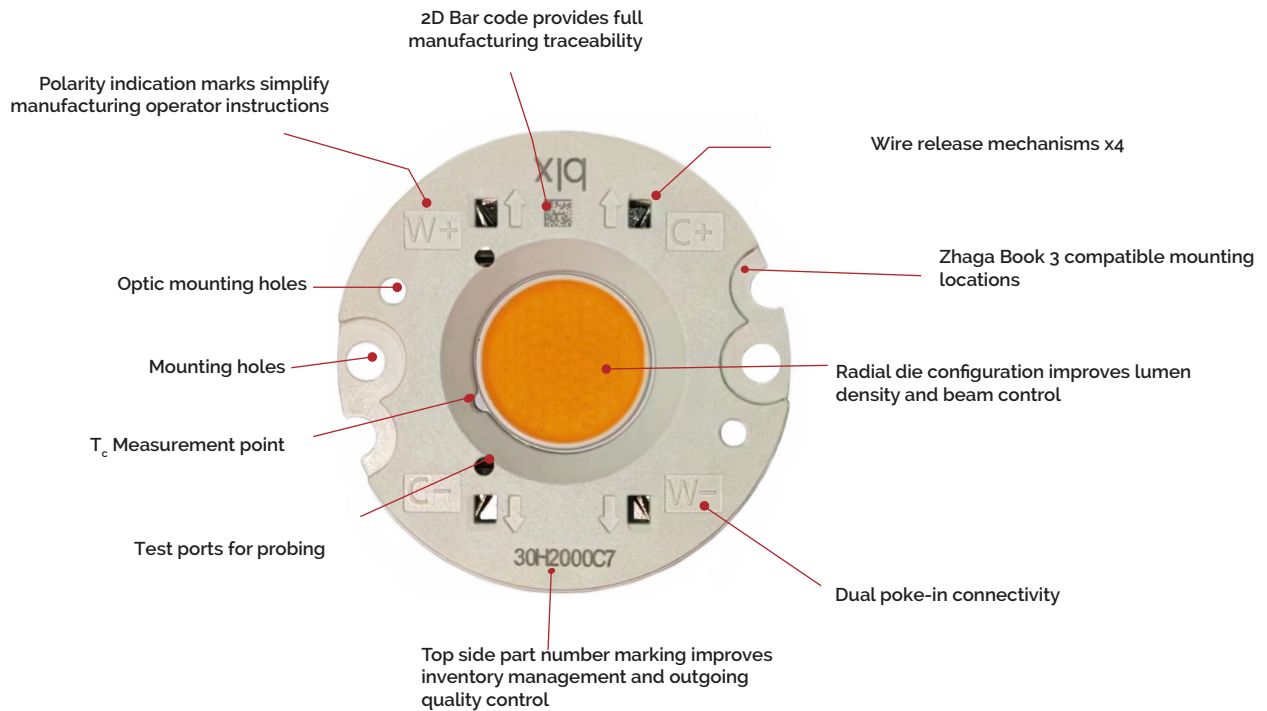

## Product Nomenclature

The part number designation for Bridgelux Vero SE LED arrays is explained as follows:

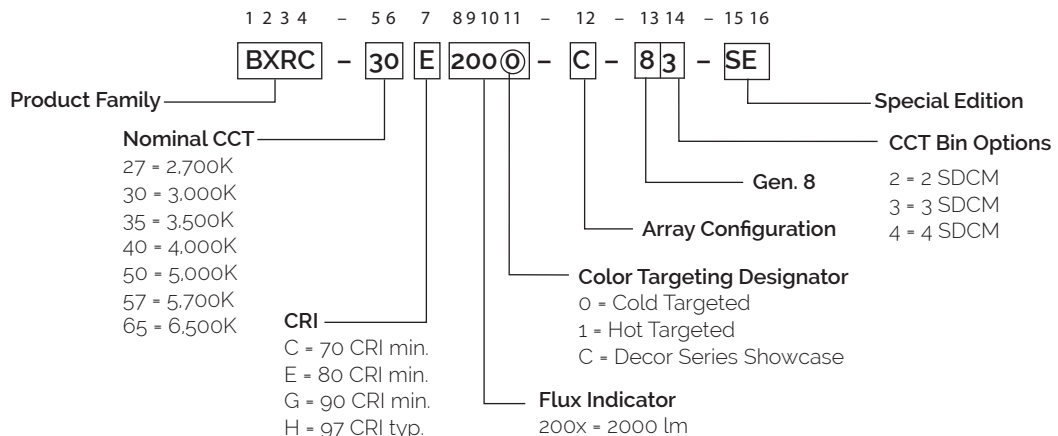

# Product Selection Guide

The following product configurations are available:

**Table 1:** Selection Guide, Pulsed Measurement Data ( $T_j = T_c = 25^\circ\text{C}$ )

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical Pulsed Flux <sup>4,5,6</sup> $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux <sup>6,7</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-22E2000-B-8X-SE	2200	80	350	1615	1454	33.4	11.7	138
BXRC-22E2000-C-8X-SE	2200	80	500	2307	2077	33.4	16.7	138
BXRC-22G2000-B-8X-SE	2200	90	350	1311	1180	33.4	11.7	112
BXRC-22G2000-C-8X-SE	2200	90	500	1873	1685	33.4	16.7	112
BXRC-27E2000-B-8x-SE	2700	80	350	1924	1732	33.4	11.7	165
BXRC-27E2000-C-8x-SE	2700	80	500	2749	2474	33.4	16.7	165
BXRC-27E2000-D-8x-SE	2700	80	400	2026	1824	30.9	12.4	164
BXRC-27G2000-B-8x-SE	2700	90	350	1587	1429	33.4	11.7	136
BXRC-27G2000-C-8x-SE	2700	90	500	2268	2041	33.4	16.7	136
BXRC-27G2000-D-8x-SE	2700	90	400	1672	1505	30.9	12.4	135
BXRC-27G20H0-B-8x-SE	2700	90	350	1656	1490	33.4	11.7	142
BXRC-27G20H0-C-8x-SE	2700	90	500	2366	2129	33.4	16.7	142
BXRC-27G20H0-D-8x-SE	2700	90	400	1744	1570	30.9	12.4	141
BXRC-27H2000-B-8x-SE	2700	97	350	1407	1266	33.4	11.7	120
BXRC-27H2000-C-8x-SE	2700	97	500	2010	1809	33.4	16.7	120
BXRC-27H2000-D-8x-SE	2700	97	400	1482	1334	30.9	12.4	120
BXRC-30C2001-B-8x-SE	3000	70	350	2140	1926	33.4	11.7	183
BXRC-30C2001-C-8x-SE	3000	70	500	3058	2752	33.4	16.7	183
BXRC-30C2001-D-8x-SE	3000	70	400	2254	2029	30.9	12.4	182
BXRC-30E2000-B-8x-SE	3000	80	350	2044	1840	33.4	11.7	175
BXRC-30E2000-C-8x-SE	3000	80	500	2920	2628	33.4	16.7	175
BXRC-30E2000-D-8x-SE	3000	80	400	2153	1938	30.9	12.4	174
BXRC-30G2000-B-8x-SE	3000	90	350	1659	1494	33.4	11.7	142
BXRC-30G2000-C-8x-SE	3000	90	500	2371	2134	33.4	16.7	142
BXRC-30G2000-D-8x-SE	3000	90	400	1748	1573	30.9	12.4	141
BXRC-30G20H0-B-8x-SE	3000	90	350	1738	1564	33.4	11.7	149
BXRC-30G20H0-C-8x-SE	3000	90	500	2482	2234	33.4	16.7	149
BXRC-30G20H0-D-8x-SE	3000	90	400	1830	1647	30.9	12.4	148
BXRC-30H2000-B-8x-SE	3000	97	350	1503	1353	33.4	11.7	129
BXRC-30H2000-C-8x-SE	3000	97	500	2147	1933	33.4	16.7	129
BXRC-30H2000-D-8x-SE	3000	97	400	1583	1425	30.9	12.4	128
BXRC-35E2000-B-8x-SE	3500	80	350	2092	1883	33.4	11.7	179
BXRC-35E2000-C-8x-SE	3500	80	500	2989	2690	33.4	16.7	179
BXRC-35E2000-D-8x-SE	3500	80	400	2204	1983	30.9	12.4	178
BXRC-35G2000-B-8x-SE	3500	90	350	1720	1548	33.4	11.7	147
BXRC-35G2000-C-8x-SE	3500	90	500	2457	2211	33.4	16.7	147
BXRC-35G2000-D-8x-SE	3500	90	400	1811	1630	30.9	12.4	147

Notes for Table 1:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, the minimum Rg value for 97 CRI products is 93. Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) -  $T_c$  (case temperature) =  $25^\circ\text{C}$ .
- Typical performance values are provided as a reference only and are not a guarantee of performance.
- Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
- Minimum flux values at the nominal test current are guaranteed by 100% test.

# Product Selection Guide

**Table 1:** Selection Guide, Pulsed Measurement Data ( $T_j = T_c = 25^\circ\text{C}$ ) (continued)

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical Pulsed Flux <sup>4,5,6</sup> $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux <sup>6,7</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-40C2001-B-8x-SE	4000	70	350	2201	1981	33.4	11.7	188
BXRC-40C2001-C-8x-SE	4000	70	500	3144	2829	33.4	16.7	188
BXRC-40C2001-D-8x-SE	4000	70	400	2318	2086	30.9	12.4	188
BXRC-40E2000-B-8x-SE	4000	80	350	2104	1894	33.4	11.7	180
BXRC-40E2000-C-8x-SE	4000	80	500	3006	2706	33.4	16.7	180
BXRC-40E2000-D-8x-SE	4000	80	400	2216	1995	30.9	12.4	179
BXRC-40G2000-B-8x-SE	4000	90	350	1756	1580	33.4	11.7	150
BXRC-40G2000-C-8x-SE	4000	90	500	2508	2257	33.4	16.7	150
BXRC-40G2000-D-8x-SE	4000	90	400	1849	1664	30.9	12.4	150
BXRC-50C2001-B-8x-SE	5000	70	350	2213	1991	33.4	11.7	189
BXRC-50C2001-C-8x-SE	5000	70	500	3161	2845	33.4	16.7	189
BXRC-50C2001-D-8x-SE	5000	70	400	2330	2097	30.9	12.4	189
BXRC-50E2001-B-8x-SE	5000	80	350	2128	1916	33.4	11.7	182
BXRC-50E2001-C-8x-SE	5000	80	500	3041	2737	33.4	16.7	182
BXRC-50E2001-D-8x-SE	5000	80	400	2242	2018	30.9	12.4	181
BXRC-50G2001-B-8x-SE	5000	90	350	1840	1656	33.4	11.7	157
BXRC-50G2001-C-8x-SE	5000	90	500	2628	2366	33.4	16.7	157
BXRC-50G2001-D-8x-SE	5000	90	400	1938	1744	30.9	12.4	157
BXRC-57C2001-B-8x-SE	5700	70	350	2153	1937	33.4	11.7	184
BXRC-57C2001-C-8x-SE	5700	70	500	3075	2768	33.4	16.7	184
BXRC-57C2001-D-8x-SE	5700	70	400	2267	2040	30.9	12.4	183
BXRC-57E2001-B-8x-SE	5700	80	350	2044	1840	33.4	11.7	175
BXRC-57E2001-C-8x-SE	5700	80	500	2920	2628	33.4	16.7	175
BXRC-57E2001-D-8x-SE	5700	80	400	2153	1938	30.9	12.4	174
BXRC-65C2001-B-8x-SE	6500	70	350	2153	1937	33.4	11.7	184
BXRC-65C2001-C-8x-SE	6500	70	500	3075	2768	33.4	16.7	184
BXRC-65C2001-D-8x-SE	6500	70	400	2267	2040	30.9	12.4	183
BXRC-65E2001-B-8x-SE	6500	80	350	2068	1861	33.4	11.7	177
BXRC-65E2001-C-8x-SE	6500	80	500	2955	2659	33.4	16.7	177
BXRC-65E2001-D-8x-SE	6500	80	400	2178	1961	30.9	12.4	176

Notes for Table 1:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, the minimum Rg value for 97 CRI products is 93. Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) -  $T_c$  (case temperature) =  $25^\circ\text{C}$ .
- Typical performance values are provided as a reference only and are not a guarantee of performance.
- Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
- Minimum flux values at the nominal test current are guaranteed by 100% test.

# Product Selection Guide

**Table 2:** Selection Guide, Stabilized DC Performance ( $T_c = 85^\circ\text{C}$ )<sup>4,5</sup>

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical DC Flux <sup>4,5</sup> $T_c = 85^\circ\text{C}$ (lm)	Minimum DC Flux <sup>6</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-22E2000-B-8X-SE	2200	80	350	1453	1308	32.7	11.4	127
BXRC-22E2000-C-8X-SE	2200	80	500	2076	1868	32.7	16.3	127
BXRC-22G2000-B-8X-SE	2200	90	350	1179	1062	32.7	11.4	103
BXRC-22G2000-C-8X-SE	2200	90	500	1685	1516	32.7	16.3	103
BXRC-27E2000-B-8x-SE	2700	80	350	1732	1558	32.7	11.4	151
BXRC-27E2000-C-8x-SE	2700	80	500	2474	2226	32.7	16.3	151
BXRC-27E2000-D-8x-SE	2700	80	400	1824	1641	30.2	12.1	151
BXRC-27G2000-B-8x-SE	2700	90	350	1429	1286	32.7	11.4	125
BXRC-27G2000-C-8x-SE	2700	90	500	2041	1837	32.7	16.3	125
BXRC-27G2000-D-8x-SE	2700	90	400	1505	1354	30.2	12.1	124
BXRC-27G20H0-B-8x-SE	2700	90	350	1490	1341	32.7	11.4	130
BXRC-27G20H0-C-8x-SE	2700	90	500	2129	1916	32.7	16.3	130
BXRC-27G20H0-D-8x-SE	2700	90	400	1570	1413	30.2	12.1	130
BXRC-27H2000-B-8x-SE	2700	97	350	1266	1140	32.7	11.4	111
BXRC-27H2000-C-8x-SE	2700	97	500	1809	1628	32.7	16.3	111
BXRC-27H2000-D-8x-SE	2700	97	400	1334	1200	30.2	12.1	110
BXRC-30C2001-B-8x-SE	3000	70	350	1926	1734	32.7	11.4	168
BXRC-30C2001-C-8x-SE	3000	70	500	2752	2477	32.7	16.3	168
BXRC-30C2001-D-8x-SE	3000	70	400	2029	1826	30.2	12.1	168
BXRC-30E2000-B-8x-SE	3000	80	350	1840	1656	32.7	11.4	161
BXRC-30E2000-C-8x-SE	3000	80	500	2628	2366	32.7	16.3	161
BXRC-30E2000-D-8x-SE	3000	80	400	1938	1744	30.2	12.1	160
BXRC-30G2000-B-8x-SE	3000	90	350	1494	1344	32.7	11.4	131
BXRC-30G2000-C-8x-SE	3000	90	500	2134	1920	32.7	16.3	131
BXRC-30G2000-D-8x-SE	3000	90	400	1573	1416	30.2	12.1	130
BXRC-30G20H0-B-8x-SE	3000	90	350	1564	1407	32.7	11.4	137
BXRC-30G20H0-C-8x-SE	3000	90	500	2234	2011	32.7	16.3	137
BXRC-30G20H0-D-8x-SE	3000	90	400	1647	1482	30.2	12.1	136
BXRC-30H2000-B-8x-SE	3000	97	350	1353	1218	32.7	11.4	118
BXRC-30H2000-C-8x-SE	3000	97	500	1933	1739	32.7	16.3	118
BXRC-30H2000-D-8x-SE	3000	97	400	1425	1282	30.2	12.1	118
BXRC-35E2000-B-8x-SE	3500	80	350	1883	1695	32.7	11.4	165
BXRC-35E2000-C-8x-SE	3500	80	500	2690	2421	32.7	16.3	165
BXRC-35E2000-D-8x-SE	3500	80	400	1983	1785	30.2	12.1	164
BXRC-35G2000-B-8x-SE	3500	90	350	1548	1393	32.7	11.4	135
BXRC-35G2000-C-8x-SE	3500	90	500	2211	1990	32.7	16.3	135

Notes for Table 2:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all other products. Minimum R<sub>g</sub> value for 80 CRI products is 0, the minimum R<sub>g</sub> value for 90 CRI products is 50, the minimum R<sub>g</sub> value for 97 CRI products is 93. Bridgelux maintains a  $\pm 3$  tolerance on CRI and R<sub>g</sub> values.
- Drive current is referred to as nominal drive current.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at  $85^\circ\text{C}$ . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

# Product Selection Guide

**Table 2:** Selection Guide, Stabilized DC Performance ( $T_c = 85^\circ\text{C}$ )<sup>4,5</sup> (continued)

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical DC Flux <sup>4,5</sup> $T_c = 85^\circ\text{C}$ (lm)	Minimum DC Flux <sup>6</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-35G2000-D-8x-SE	3500	90	400	1630	1467	30.2	12.1	135
BXRC-40G2000-B-8x-SE	4000	90	350	1580	1422	32.7	11.4	138
BXRC-40G2000-C-8x-SE	4000	90	500	2257	2032	32.7	16.3	138
BXRC-40G2000-D-8x-SE	4000	90	400	1664	1498	30.2	12.1	138
BXRC-40C2001-B-8x-SE	4000	70	350	1981	1782	32.7	11.4	173
BXRC-40C2001-C-8x-SE	4000	70	500	2829	2546	32.7	16.3	173
BXRC-40C2001-D-8x-SE	4000	70	400	2086	1877	30.2	12.1	173
BXRC-40E2000-B-8x-SE	4000	80	350	1894	1705	32.7	11.4	166
BXRC-40E2000-C-8x-SE	4000	80	500	2706	2435	32.7	16.3	166
BXRC-40E2000-D-8x-SE	4000	80	400	1995	1795	30.2	12.1	165
BXRC-40G2000-B-8x-SE	4000	90	350	1580	1422	32.7	11.4	138
BXRC-40G2000-C-8x-SE	4000	90	500	2257	2032	32.7	16.3	138
BXRC-40G2000-D-8x-SE	4000	90	400	1664	1498	30.2	12.1	138
BXRC-50C2001-B-8x-SE	5000	70	350	1991	1792	32.7	11.4	174
BXRC-50C2001-C-8x-SE	5000	70	500	2845	2560	32.7	16.3	174
BXRC-50C2001-D-8x-SE	5000	70	400	2097	1888	30.2	12.1	173
BXRC-50E2001-B-8x-SE	5000	80	350	1916	1724	32.7	11.4	167
BXRC-50E2001-C-8x-SE	5000	80	500	2737	2463	32.7	16.3	167
BXRC-50E2001-D-8x-SE	5000	80	400	2018	1816	30.2	12.1	167
BXRC-50G2001-B-8x-SE	5000	90	350	1656	1490	32.7	11.4	145
BXRC-50G2001-C-8x-SE	5000	90	500	2366	2129	32.7	16.3	145
BXRC-50G2001-D-8x-SE	5000	90	400	1744	1570	30.2	12.1	144
BXRC-57C2001-B-8x-SE	5700	70	350	1937	1744	32.7	11.4	169
BXRC-57C2001-C-8x-SE	5700	70	500	2768	2491	32.7	16.3	169
BXRC-57C2001-D-8x-SE	5700	70	400	2040	1836	30.2	12.1	169
BXRC-57E2001-B-8x-SE	5700	80	350	1840	1656	32.7	11.4	161
BXRC-57E2001-C-8x-SE	5700	80	500	2628	2366	32.7	16.3	161
BXRC-57E2001-D-8x-SE	5700	80	400	1938	1744	30.2	12.1	160
BXRC-65C2001-B-8x-SE	6500	70	350	1937	1744	32.7	11.4	169
BXRC-65C2001-C-8x-SE	6500	70	500	2768	2491	32.7	16.3	169
BXRC-65C2001-D-8x-SE	6500	70	400	2040	1836	30.2	12.1	169
BXRC-65E2001-B-8x-SE	6500	80	350	1861	1675	32.7	11.4	163
BXRC-65E2001-C-8x-SE	6500	80	500	2659	2393	32.7	16.3	163
BXRC-65E2001-D-8x-SE	6500	80	400	1961	1764	30.2	12.1	162

Notes for Table 2:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to  $T_c = 85^\circ\text{C}$ .
- CRI values are minimums for all other products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, the minimum Rg value for 97 CRI products is 93. Bridgelux maintains a  $\pm 3$  tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at  $85^\circ\text{C}$ . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.



# European Product Registry for Energy Labeling

The European Product Registry for Energy Labeling (EPREL) is defined in the EU Regulation 2017/1369 to provide important energy efficiency information to consumers. Together with Energy Labeling Regulation ELR (EU) 2019/2015 which was amended by regulation (EU) 2021/340 for energy labelling of light sources, manufacturers are required to declare an energy class based on key technical specifications from each of their product and register it in an open data base managed by EPREL. It is now a legal requirement for a vendor of light sources to upload information about their products into the EPREL database before placing these products on the market in the EU.

Table 3 below provides a list of part numbers that are in compliance with ELR and are currently listed in the EPREL database.

At Bridgelux, we are fully committed to supplying products that are compliant with pertinent laws, rules, and obligation imposed by relevant government bodies including the European Energy Labeling regulation. Customers can use these products with full confidence for any projects that fall under the ELR.

**Table 3:** Part numbers registered in European Product Registry for Energy Labeling

PART NUMBER <sup>1</sup>	CCT (K)	CRI	Current <sup>2</sup> (mA)	Vf (V)	Useful flux <sup>3</sup> ( $\Phi_{use}$ ) at 85C (lm)	Power (W)	Efficacy (lm/W)	Energy efficiency class <sup>4</sup>	Registration No	URL to Product Information Sheet in EPREL Database
BXRC-27E2000-B-83-SE	2700	80	1250	38.3	4867	47.9	102	E	872493	<a href="https://eprelec.europa.eu/qr/872493">https://eprelec.europa.eu/qr/872493</a>
BXRC-27E2000-C-83-SE	2700	80	1750	36.8	6829	64.4	106	E	872498	<a href="https://eprelec.europa.eu/qr/872498">https://eprelec.europa.eu/qr/872498</a>
BXRC-27E2000-D-83-SE	2700	80	1250	33.4	4549	41.8	109	E	872503	<a href="https://eprelec.europa.eu/qr/872503">https://eprelec.europa.eu/qr/872503</a>
BXRC-27G2000-B-83-SE	2700	90	1250	38.3	4015	47.9	84	F	872579	<a href="https://eprelec.europa.eu/qr/872579">https://eprelec.europa.eu/qr/872579</a>
BXRC-27G2000-C-83-SE	2700	90	1750	36.8	5634	64.4	88	F	872584	<a href="https://eprelec.europa.eu/qr/872584">https://eprelec.europa.eu/qr/872584</a>
BXRC-27G2000-D-83-SE	2700	90	1250	33.4	3753	41.8	90	F	872589	<a href="https://eprelec.europa.eu/qr/872589">https://eprelec.europa.eu/qr/872589</a>
BXRC-27G20H0-B-83-SE	2700	90	1250	38.3	4189	47.9	87	F	872593	<a href="https://eprelec.europa.eu/qr/872593">https://eprelec.europa.eu/qr/872593</a>
BXRC-27G20H0-C-83-SE	2700	90	1750	36.8	5877	64.4	91	F	872597	<a href="https://eprelec.europa.eu/qr/872597">https://eprelec.europa.eu/qr/872597</a>
BXRC-27G20H0-D-83-SE	2700	90	1250	33.4	3915	41.8	94	F	872601	<a href="https://eprelec.europa.eu/qr/872601">https://eprelec.europa.eu/qr/872601</a>
BXRC-27H2000-B-83-SE	2700	95	1070	37.5	3130	40.1	78	G	872652	<a href="https://eprelec.europa.eu/qr/872652">https://eprelec.europa.eu/qr/872652</a>
BXRC-27H2000-C-83-SE	2700	95	1650	36.5	4757	60.2	79	F	872656	<a href="https://eprelec.europa.eu/qr/872656">https://eprelec.europa.eu/qr/872656</a>
BXRC-27H2000-D-83-SE	2700	95	1250	33.4	3327	41.8	80	F	872660	<a href="https://eprelec.europa.eu/qr/872660">https://eprelec.europa.eu/qr/872660</a>
BXRC-30C2001-B-83-SE	3000	70	1250	38.3	5415	47.9	113	E	872731	<a href="https://eprelec.europa.eu/qr/872731">https://eprelec.europa.eu/qr/872731</a>
BXRC-30C2001-C-83-SE	3000	70	1750	36.8	7598	64.4	118	E	872737	<a href="https://eprelec.europa.eu/qr/872737">https://eprelec.europa.eu/qr/872737</a>
BXRC-30C2001-D-83-SE	3000	70	1250	33.4	5061	41.8	121	E	872743	<a href="https://eprelec.europa.eu/qr/872743">https://eprelec.europa.eu/qr/872743</a>
BXRC-30E2000-B-83-SE	3000	80	1250	38.3	5171	47.9	108	E	872799	<a href="https://eprelec.europa.eu/qr/872799">https://eprelec.europa.eu/qr/872799</a>
BXRC-30E2000-C-83-SE	3000	80	1750	36.8	7256	64.4	113	E	872804	<a href="https://eprelec.europa.eu/qr/872804">https://eprelec.europa.eu/qr/872804</a>
BXRC-30E2000-D-83-SE	3000	80	1250	33.4	4834	41.8	116	E	872809	<a href="https://eprelec.europa.eu/qr/872809">https://eprelec.europa.eu/qr/872809</a>
BXRC-30G2000-B-83-SE	3000	90	1250	38.3	4198	47.9	88	F	872889	<a href="https://eprelec.europa.eu/qr/872889">https://eprelec.europa.eu/qr/872889</a>

Notes for Table 3:

- All device listed here must be disposed as e-waste upon its end of life according to local country guideline in each country.
- For information on performance values at alternative drive conditions, please refer to the Product Selection Guide, Absolute Maximum Rating Table and Performance Curves in this data sheet.
- For a definition of useful luminous flux ( $\Phi_{use}$ ), please see the ELR regulations at <https://tinyurl.com/4b6zvt4m>.
- EPREL requires an arrow symbol containing the letter of the energy efficiency class to be displayed, on technical promotional material. Refer to this energy efficiency class column for specific energy efficiency class on each part number.

# European Product Registry for Energy Labeling

**Table 3:** Part numbers registered in European Product Registry for Energy Labeling (Continued)


PART NUMBER <sup>1</sup>	CCT (K)	CRI	Current <sup>2</sup> (mA)	Vf (V)	Useful flux <sup>3</sup> ( $\Phi_{use}$ ) at 85°C (lm)	Power (W)	Efficacy (lm/W)	Energy efficiency class <sup>4</sup>	Registration No	URL to Product Information Sheet in EPREL Database
BXRC-30G2000-C-83-SE	3000	90	1750	36.8	5890	64.4	92	F	872894	<a href="https://eprelec.europa.eu/qr/872894">https://eprelec.europa.eu/qr/872894</a>
BXRC-30G2000-D-83-SE	3000	90	1250	33.4	3924	41.8	94	F	872899	<a href="https://eprelec.europa.eu/qr/872899">https://eprelec.europa.eu/qr/872899</a>
BXRC-30G20H0-B-83-SE	3000	90	1250	38.3	4396	47.9	92	F	872910	<a href="https://eprelec.europa.eu/qr/872910">https://eprelec.europa.eu/qr/872910</a>
BXRC-30G20H0-C-83-SE	3000	90	1750	36.8	6168	64.4	96	F	872914	<a href="https://eprelec.europa.eu/qr/872914">https://eprelec.europa.eu/qr/872914</a>
BXRC-30G20H0-D-83-SE	3000	90	1250	33.4	4109	41.8	98	F	872918	<a href="https://eprelec.europa.eu/qr/872918">https://eprelec.europa.eu/qr/872918</a>
BXRC-30H2000-B-83-SE	3000	95	1250	38.3	3802	47.9	79	F	872975	<a href="https://eprelec.europa.eu/qr/872975">https://eprelec.europa.eu/qr/872975</a>
BXRC-30H2000-C-83-SE	3000	95	1750	36.8	5335	64.4	83	F	872979	<a href="https://eprelec.europa.eu/qr/872979">https://eprelec.europa.eu/qr/872979</a>
BXRC-30H2000-D-83-SE	3000	95	1250	33.4	3554	41.8	85	F	872983	<a href="https://eprelec.europa.eu/qr/872983">https://eprelec.europa.eu/qr/872983</a>
BXRC-35E2000-B-83-SE	3500	80	1250	38.3	5293	47.9	110	E	873046	<a href="https://eprelec.europa.eu/qr/873046">https://eprelec.europa.eu/qr/873046</a>
BXRC-35E2000-C-83-SE	3500	80	1750	36.8	7427	64.4	115	E	873051	<a href="https://eprelec.europa.eu/qr/873051">https://eprelec.europa.eu/qr/873051</a>
BXRC-35E2000-D-83-SE	3500	80	1250	33.4	4947	41.8	118	E	873056	<a href="https://eprelec.europa.eu/qr/873056">https://eprelec.europa.eu/qr/873056</a>
BXRC-35G2000-B-83-SE	3500	90	1250	38.3	4350	47.9	91	F	873108	<a href="https://eprelec.europa.eu/qr/873108">https://eprelec.europa.eu/qr/873108</a>
BXRC-35G2000-C-83-SE	3500	90	1750	36.8	6104	64.4	95	F	873113	<a href="https://eprelec.europa.eu/qr/873113">https://eprelec.europa.eu/qr/873113</a>
BXRC-35G2000-D-83-SE	3500	90	1250	33.4	4066	41.8	97	F	873118	<a href="https://eprelec.europa.eu/qr/873118">https://eprelec.europa.eu/qr/873118</a>
BXRC-40C2001-B-83-SE	4000	70	1250	38.3	5567	47.9	116	E	873194	<a href="https://eprelec.europa.eu/qr/873194">https://eprelec.europa.eu/qr/873194</a>
BXRC-40C2001-C-83-SE	4000	70	1750	36.8	7811	64.4	121	E	873200	<a href="https://eprelec.europa.eu/qr/873200">https://eprelec.europa.eu/qr/873200</a>
BXRC-40C2001-D-83-SE	4000	70	1250	33.4	5203	41.8	124	D	873206	<a href="https://eprelec.europa.eu/qr/873206">https://eprelec.europa.eu/qr/873206</a>
BXRC-40E2000-B-83-SE	4000	80	1250	38.3	5323	47.9	111	E	873262	<a href="https://eprelec.europa.eu/qr/873262">https://eprelec.europa.eu/qr/873262</a>
BXRC-40E2000-C-83-SE	4000	80	1750	36.8	7470	64.4	116	E	873267	<a href="https://eprelec.europa.eu/qr/873267">https://eprelec.europa.eu/qr/873267</a>
BXRC-40E2000-D-83-SE	4000	80	1250	33.4	4976	41.8	119	E	873272	<a href="https://eprelec.europa.eu/qr/873272">https://eprelec.europa.eu/qr/873272</a>
BXRC-40G2000-B-83-SE	4000	90	1250	38.3	4441	47.9	93	F	873324	<a href="https://eprelec.europa.eu/qr/873324">https://eprelec.europa.eu/qr/873324</a>
BXRC-40G2000-C-83-SE	4000	90	1750	36.8	6232	64.4	97	F	873329	<a href="https://eprelec.europa.eu/qr/873329">https://eprelec.europa.eu/qr/873329</a>
BXRC-40G2000-D-83-SE	4000	90	1250	33.4	4151	41.8	99	F	873334	<a href="https://eprelec.europa.eu/qr/873334">https://eprelec.europa.eu/qr/873334</a>
BXRC-50C2001-B-83-SE	5000	70	1250	38.3	5597	47.9	117	E	873398	<a href="https://eprelec.europa.eu/qr/873398">https://eprelec.europa.eu/qr/873398</a>
BXRC-50C2001-C-83-SE	5000	70	1750	36.8	7854	64.4	122	E	873402	<a href="https://eprelec.europa.eu/qr/873402">https://eprelec.europa.eu/qr/873402</a>
BXRC-50C2001-D-83-SE	5000	70	1250	33.4	5232	41.8	125	D	873406	<a href="https://eprelec.europa.eu/qr/873406">https://eprelec.europa.eu/qr/873406</a>
BXRC-50E2001-B-83-SE	5000	80	1250	38.3	5384	47.9	112	E	873446	<a href="https://eprelec.europa.eu/qr/873446">https://eprelec.europa.eu/qr/873446</a>
BXRC-50E2001-C-83-SE	5000	80	1750	36.8	7555	64.4	117	E	873450	<a href="https://eprelec.europa.eu/qr/873450">https://eprelec.europa.eu/qr/873450</a>
BXRC-50E2001-D-83-SE	5000	80	1250	33.4	5033	41.8	120	E	873454	<a href="https://eprelec.europa.eu/qr/873454">https://eprelec.europa.eu/qr/873454</a>
BXRC-50G2001-B-83-SE	5000	90	1250	38.3	4654	47.9	97	F	873494	<a href="https://eprelec.europa.eu/qr/873494">https://eprelec.europa.eu/qr/873494</a>
BXRC-50G2001-C-83-SE	5000	90	1750	36.8	6530	64.4	101	E	873498	<a href="https://eprelec.europa.eu/qr/873498">https://eprelec.europa.eu/qr/873498</a>
BXRC-50G2001-D-83-SE	5000	90	1250	33.4	4350	41.8	104	E	873502	<a href="https://eprelec.europa.eu/qr/873502">https://eprelec.europa.eu/qr/873502</a>
BXRC-57C2001-B-83-SE	5700	70	1250	38.3	5445	47.9	114	E	873580	<a href="https://eprelec.europa.eu/qr/873580">https://eprelec.europa.eu/qr/873580</a>

Notes for Table 3:

- All device listed here must be disposed as e-waste upon its end of life according to local country guideline in each country.
- For information on performance values at alternative drive conditions, please refer to the Product Selection Guide, Absolute Maximum Rating Table and Performance Curves in this data sheet.
- For a definition of useful luminous flux ( $\Phi_{use}$ ), please see the ELR regulations at <https://tinyurl.com/4b6zvt4m>.
- EPREL requires an arrow symbol containing the letter of the energy efficiency class to be displayed, on technical promotional material. Refer to this energy efficiency class column for specific energy efficiency class on each part number.

# European Product Registry for Energy Labeling

**Table 3:** Part numbers registered in European Product Registry for Energy Labeling (Continued)

PART NUMBER <sup>1</sup>	CCT (K)	CRI	Current <sup>2</sup> (mA)	Vf (V)	Useful flux <sup>3</sup> ( $\Phi_{use}$ ) at 85°C (lm)	Power (W)	Efficacy (lm/W)	Energy efficiency class <sup>4</sup> 	Registration No	URL to Product Information Sheet in EPREL Database
BXRC-57C2001-C-83-SE	5700	70	1750	36.8	7640	64.4	119	E	873584	<a href="https://eprelec.europa.eu/qr/873584">https://eprelec.europa.eu/qr/873584</a>
BXRC-57C2001-D-83-SE	5700	70	1250	33.4	5089	41.8	122	E	873588	<a href="https://eprelec.europa.eu/qr/873588">https://eprelec.europa.eu/qr/873588</a>
BXRC-57E2001-B-83-SE	5700	80	1250	38.3	5171	47.9	108	E	873628	<a href="https://eprelec.europa.eu/qr/873628">https://eprelec.europa.eu/qr/873628</a>
BXRC-57E2001-C-83-SE	5700	80	1750	36.8	7256	64.4	113	E	873632	<a href="https://eprelec.europa.eu/qr/873632">https://eprelec.europa.eu/qr/873632</a>
BXRC-57E2001-D-83-SE	5700	80	1250	33.4	4834	41.8	116	E	873636	<a href="https://eprelec.europa.eu/qr/873636">https://eprelec.europa.eu/qr/873636</a>
BXRC-65C2001-B-83-SE	6500	70	1250	38.3	5445	47.9	114	E	873676	<a href="https://eprelec.europa.eu/qr/873676">https://eprelec.europa.eu/qr/873676</a>
BXRC-65C2001-C-83-SE	6500	70	1750	36.8	7640	64.4	119	E	873680	<a href="https://eprelec.europa.eu/qr/873680">https://eprelec.europa.eu/qr/873680</a>
BXRC-65C2001-D-83-SE	6500	70	1250	33.4	5089	41.8	122	E	873684	<a href="https://eprelec.europa.eu/qr/873684">https://eprelec.europa.eu/qr/873684</a>
BXRC-65E2001-B-83-SE	6500	80	1250	38.3	5232	47.9	109	E	873724	<a href="https://eprelec.europa.eu/qr/873724">https://eprelec.europa.eu/qr/873724</a>
BXRC-65E2001-C-83-SE	6500	80	1750	36.8	7341	64.4	114	E	873728	<a href="https://eprelec.europa.eu/qr/873728">https://eprelec.europa.eu/qr/873728</a>
BXRC-65E2001-D-83-SE	6500	80	1250	33.4	4890	41.8	117	E	873732	<a href="https://eprelec.europa.eu/qr/873732">https://eprelec.europa.eu/qr/873732</a>

Notes for Table 3:

1. All device listed here must be disposed as e-waste upon its end of life according to local country guideline in each country.
2. For information on performance values at alternative drive conditions, please refer to the Product Selection Guide, Absolute Maximum Rating Table and Performance Curves in this data sheet.
3. For a definition of useful luminous flux ( $\Phi_{use}$ ), please see the ELR regulations at <https://tinyurl.com/4b6zvt4m>.
4. EPREL requires an arrow symbol containing the letter of the energy efficiency class to be displayed, on technical promotional material. Refer to this energy efficiency class column for specific energy efficiency class on each part number.

# Performance at Commonly Used Drive Currents

Vero LED arrays are tested to the specifications shown using the nominal drive currents in Table 1. Vero SE may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figures 1, 2 & 3 and the flux vs. current characteristics shown in Figures 4, 5 & 6. The performance at commonly used drive currents is summarized in Table 3.

**Table 4:** Product Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-22E2000-B-8X-SE	80	175	32.4	5.7	838	754	147
		260	32.9	8.6	1215	1093	141
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1615</b>	<b>1453</b>	<b>138</b>
		450	33.9	15.3	2039	1834	133
		700	35.2	24.6	3085	2776	125
		1250	37.6	47.0	5235	4710	111
BXRC-22E2000-C-8X-SE	80	250	32.5	8.1	1197	1077	148
		375	33.0	12.4	1751	1575	141
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2307</b>	<b>2076</b>	<b>138</b>
		630	33.9	21.4	2858	2571	134
		1000	35.2	35.2	4407	3965	125
		1750	37.5	65.7	7344	6609	112
BXRC-22G2000-B-8X-SE	90	175	32.4	5.7	680	612	119
		260	32.9	8.6	986	887	115
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1311</b>	<b>1179</b>	<b>112</b>
		450	33.9	15.3	1655	1489	108
		700	35.2	24.6	2504	2253	102
		1250	37.6	47.0	4249	3823	90
BXRC-22G2000-C-8X-SE	90	250	32.5	8.1	972	874	120
		375	33.0	12.4	1421	1279	115
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>1873</b>	<b>1685</b>	<b>112</b>
		630	33.9	21.4	2319	2087	108
		1000	35.2	35.2	3577	3219	102
		1750	37.6	65.7	5961	5364	91
BXRC-27E2000-B-8x-SE	80	175	32.4	5.7	998	898	176
		260	32.9	8.6	1447	1302	169
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1924</b>	<b>1732</b>	<b>165</b>
		450	33.9	15.3	2429	2186	159
		700	35.2	24.6	3675	3307	149
		1250	37.6	47	6236	5612	133
BXRC-27E2000-C-8x-SE	80	250	32.5	8.1	1426	1283	176
		375	33	12.4	2086	1877	169
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2749</b>	<b>2474</b>	<b>164</b>
		630	33.9	21.4	3404	3064	159
		1000	35.2	35.2	5250	4725	149
		1750	37.5	65.7	8750	7875	133

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-27E2000-D-8x-SE	80	200	30	6	1051	946	175
		300	30.4	9.1	1538	1384	169
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2026</b>	<b>1824</b>	<b>164</b>
		500	31.3	15.6	2491	2242	159
		800	32.5	26	3871	3483	149
		1250	34.1	42.7	5828	5245	137
BXRC-27G2000-B-8x-SE	90	175	32.4	5.7	823	741	145
		260	32.9	8.6	1194	1074	140
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1587</b>	<b>1429</b>	<b>136</b>
		450	33.9	15.3	2004	1803	131
		700	35.2	24.6	3032	2729	123
		1250	37.6	47	5145	4630	109
BXRC-27G2000-C-8x-SE	90	250	32.5	8.1	1176	1059	145
		375	33	12.4	1721	1549	139
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2268</b>	<b>2041</b>	<b>136</b>
		630	33.9	21.4	2808	2527	131
		1000	35.2	35.2	4331	3898	123
		1750	37.5	65.7	7219	6497	110
BXRC-27G2000-D-8x-SE	90	200	30	6	867	781	145
		300	30.4	9.1	1269	1142	139
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>1672</b>	<b>1505</b>	<b>135</b>
		500	31.3	15.6	2055	1849	131
		800	32.5	26	3193	2874	123
		1250	34.1	42.7	4808	4327	113
BXRC-27G20H0-B-8x-SE	90	175	32.4	5.7	859	773	151
		260	32.9	8.6	1245	1121	146
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1656</b>	<b>1490</b>	<b>142</b>
		450	33.9	15.3	2090	1881	137
		700	35.2	24.6	3163	2847	128
		1250	37.6	47	5367	4830	114
BXRC-27G20H0-C-8x-SE	90	250	32.5	8.1	1227	1104	151
		375	33	12.4	1795	1616	145
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2366</b>	<b>2129</b>	<b>142</b>
		630	33.9	21.4	2930	2637	137
		1000	35.2	35.2	4518	4066	128
		1750	37.5	65.7	7530	6777	115
BXRC-27G20H0-D-8x-SE	90	200	30	6	905	814	151
		300	30.4	9.1	1323	1191	145
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>1744</b>	<b>1570</b>	<b>141</b>
		500	31.3	15.6	2144	1929	137
		800	32.5	26	3331	2998	128
		1250	34.1	42.7	5016	4514	118

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-27H2000-B-8x-SE	97 typ.	175	32.4	5.7	730	657	129
		260	32.9	8.6	1058	952	124
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1407</b>	<b>1266</b>	<b>120</b>
		450	33.9	15.3	1776	1598	116
		700	35.2	24.6	2687	2419	109
		1250	37.6	47	4560	4104	97
BXRC-27H2000-C-8x-SE	97 typ.	250	32.5	8.1	1043	938	128
		375	33	12.4	1525	1373	123
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2010</b>	<b>1809</b>	<b>120</b>
		630	33.9	21.4	2489	2240	117
		1000	35.2	35.2	3839	3455	109
		1750	37.5	65.7	6398	5758	97
BXRC-27H2000-D-8x-SE	97 typ.	200	30	6	769	692	128
		300	30.4	9.1	1124	1012	123
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>1482</b>	<b>1334</b>	<b>120</b>
		500	31.3	15.6	1821	1639	116
		800	32.5	26	2830	2547	109
		1250	34.1	42.7	4262	3836	100
BXRC-30C2001-B-8x-SE	70	175	32.4	5.7	1110	999	196
		260	32.9	8.6	1610	1449	188
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2140</b>	<b>1926</b>	<b>183</b>
		450	33.9	15.3	2702	2432	177
		700	35.2	24.6	4088	3680	166
		1250	37.6	47	6937	6244	148
BXRC-30C2001-C-8x-SE	70	250	32.5	8.1	1586	1428	195
		375	33	12.4	2320	2088	188
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>3058</b>	<b>2752</b>	<b>183</b>
		630	33.9	21.4	3787	3408	177
		1000	35.2	35.2	5841	5257	166
		1750	37.5	65.7	9734	8761	148
BXRC-30C2001-D-8x-SE	70	200	30	6	1170	1053	195
		300	30.4	9.1	1711	1540	187
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2254</b>	<b>2029</b>	<b>183</b>
		500	31.3	15.6	2771	2494	177
		800	32.5	26	4306	3875	166
		1250	34.1	42.7	6484	5835	152
BXRC-30E2000-B-8x-SE	80	175	32.4	5.7	1061	954	187
		260	32.9	8.6	1537	1384	180
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2044</b>	<b>1840</b>	<b>175</b>
		450	33.9	15.3	2580	2322	169
		700	35.2	24.6	3905	3514	159
		1250	37.6	47	6626	5963	141

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-30E2000-C-8x-SE	80	250	32.5	8.1	1515	1364	187
		375	33	12.4	2216	1995	179
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2920</b>	<b>2628</b>	<b>175</b>
		630	33.9	21.4	3617	3255	169
		1000	35.2	35.2	5578	5020	158
		1750	37.5	65.7	9297	8367	142
BXRC-30E2000-D-8x-SE	80	200	30	6	1117	1005	186
		300	30.4	9.1	1634	1470	179
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2153</b>	<b>1938</b>	<b>174</b>
		500	31.3	15.6	2646	2382	169
		800	32.5	26	4112	3701	158
		1250	34.1	42.7	6192	5573	145
BXRC-30G2000-B-8x-SE	90	175	32.4	5.7	861	775	152
		260	32.9	8.6	1248	1123	146
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1659</b>	<b>1494</b>	<b>142</b>
		450	33.9	15.3	2095	1885	137
		700	35.2	24.6	3170	2853	129
		1250	37.6	47	5378	4841	114
BXRC-30G2000-C-8x-SE	90	250	32.5	8.1	1230	1107	151
		375	33	12.4	1799	1619	146
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2371</b>	<b>2134</b>	<b>142</b>
		630	33.9	21.4	2936	2642	137
		1000	35.2	35.2	4528	4075	129
		1750	37.5	65.7	7547	6792	115
BXRC-30G2000-D-8x-SE	90	200	30	6	907	816	151
		300	30.4	9.1	1326	1194	145
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>1748</b>	<b>1573</b>	<b>142</b>
		500	31.3	15.6	2148	1933	137
		800	32.5	26	3338	3005	128
		1250	34.1	42.7	5027	4524	118
BXRC-30G20H0-B-8x-SE	90	175	32.4	5.7	901	811	159
		260	32.9	8.6	1307	1176	153
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1738</b>	<b>1564</b>	<b>149</b>
		450	33.9	15.3	2193	1974	144
		700	35.2	24.6	3319	2987	135
		1250	37.6	47	5632	5069	120
BXRC-30G20H0-C-8x-SE	90	250	32.5	8.1	1288	1159	159
		375	33	12.4	1884	1695	152
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2482</b>	<b>2234</b>	<b>148</b>
		630	33.9	21.4	3074	2767	144
		1000	35.2	35.2	4741	4267	135
		1750	37.5	65.7	7902	7112	120

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-30G20H0-D-8x-SE	90	200	30	6	949	854	158
		300	30.4	9.1	1389	1250	152
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>1830</b>	<b>1647</b>	<b>148</b>
		500	31.3	15.6	2249	2025	144
		800	32.5	26	3496	3146	134
		1250	34.1	42.7	5263	4737	123
BXRC-30H2000-B-8x-SE	97 typ.	175	32.4	5.7	780	702	137
		260	32.9	8.6	1130	1017	132
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1503</b>	<b>1353</b>	<b>129</b>
		450	33.9	15.3	1897	1708	124
		700	35.2	24.6	2871	2584	117
		1250	37.6	47	4872	4385	104
BXRC-30H2000-C-8x-SE	97 typ.	250	32.5	8.1	1114	1003	137
		375	33	12.4	1630	1467	132
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2147</b>	<b>1933</b>	<b>128</b>
		630	33.9	21.4	2659	2393	124
		1000	35.2	35.2	4102	3691	116
		1750	37.5	65.7	6836	6152	104
BXRC-30H2000-D-8x-SE	97 typ.	200	30	6	821	739	137
		300	30.4	9.1	1201	1081	132
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>1583</b>	<b>1425</b>	<b>128</b>
		500	31.3	15.6	1946	1751	124
		800	32.5	26	3024	2721	116
		1250	34.1	42.7	4553	4098	107
BXRC-35E2000-B-8x-SE	80	175	32.4	5.7	1086	977	191
		260	32.9	8.6	1574	1416	184
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2092</b>	<b>1883</b>	<b>179</b>
		450	33.9	15.3	2641	2377	173
		700	35.2	24.6	3997	3597	162
		1250	37.6	47	6781	6103	144
BXRC-35E2000-C-8x-SE	80	250	32.5	8.1	1551	1396	191
		375	33	12.4	2268	2041	184
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2989</b>	<b>2690</b>	<b>179</b>
		630	33.9	21.4	3702	3332	173
		1000	35.2	35.2	5709	5138	162
		1750	37.5	65.7	9515	8564	145
BXRC-35E2000-D-8x-SE	80	200	30	6	1143	1029	191
		300	30.4	9.1	1672	1505	183
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2204</b>	<b>1983</b>	<b>179</b>
		500	31.3	15.6	2709	2438	173
		800	32.5	26	4209	3788	162
		1250	34.1	42.7	6338	5704	149

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.



# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux <sup>2</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux <sup>3</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-35G2000-B-8x-SE	90	175	32.4	5.7	892	803	157
		260	32.9	8.6	1293	1164	151
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1720</b>	<b>1548</b>	<b>147</b>
		450	33.9	15.3	2171	1954	142
		700	35.2	24.6	3285	2956	133
		1250	37.6	47	5573	5016	119
BXRC-35G2000-C-8x-SE	90	250	32.5	8.1	1274	1147	157
		375	33	12.4	1864	1678	151
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2457</b>	<b>2211</b>	<b>147</b>
		630	33.9	21.4	3042	2738	142
		1000	35.2	35.2	4692	4223	133
		1750	37.5	65.7	7820	7038	119
BXRC-35G2000-D-8x-SE	90	200	30	6	940	846	157
		300	30.4	9.1	1374	1237	151
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>1811</b>	<b>1630</b>	<b>147</b>
		500	31.3	15.6	2226	2004	142
		800	32.5	26	3459	3113	133
		1250	34.1	42.7	5209	4688	122
BXRC-40C2001-B-8x-SE	70	175	32.4	5.7	1142	1027	201
		260	32.9	8.6	1655	1489	193
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2201</b>	<b>1981</b>	<b>188</b>
		450	33.9	15.3	2778	2500	182
		700	35.2	24.6	4203	3783	171
		1250	37.6	47	7132	6419	152
BXRC-40C2001-C-8x-SE	70	250	32.5	8.1	1631	1468	201
		375	33	12.4	2386	2147	193
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>3144</b>	<b>2829</b>	<b>188</b>
		630	33.9	21.4	3893	3504	182
		1000	35.2	35.2	6005	5404	171
		1750	37.5	65.7	10008	9007	152
BXRC-40C2001-D-8x-SE	70	200	30	6	1202	1082	201
		300	30.4	9.1	1759	1583	193
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2318</b>	<b>2086</b>	<b>188</b>
		500	31.3	15.6	2849	2564	182
		800	32.5	26	4427	3984	170
		1250	34.1	42.7	6666	5999	156
BXRC-40E2000-B-8x-SE	80	175	32.4	5.7	1092	983	192
		260	32.9	8.6	1583	1424	185
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2104</b>	<b>1894</b>	<b>180</b>
		450	33.9	15.3	2656	2391	174
		700	35.2	24.6	4020	3618	163
		1250	37.6	47	6820	6138	145

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-40E2000-C-8x-SE	80	250	32.5	8.1	1560	1404	192
		375	33	12.4	2281	2053	185
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>3006</b>	<b>2706</b>	<b>180</b>
		630	33.9	21.4	3723	3351	174
		1000	35.2	35.2	5742	5168	163
		1750	37.5	65.7	9570	8613	146
BXRC-40E2000-D-8x-SE	80	200	30	6	1150	1035	192
		300	30.4	9.1	1682	1514	184
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2216</b>	<b>1995</b>	<b>180</b>
		500	31.3	15.6	2724	2452	174
		800	32.5	26	4233	3810	163
		1250	34.1	42.7	6374	5737	149
BXRC-40G2000-B-8x-SE	90	175	32.4	5.7	911	820	160
		260	32.9	8.6	1320	1188	154
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1756</b>	<b>1580</b>	<b>150</b>
		450	33.9	15.3	2216	1994	145
		700	35.2	24.6	3353	3018	136
		1250	37.6	47	5690	5121	121
BXRC-40G2000-C-8x-SE	90	250	32.5	8.1	1301	1171	160
		375	33	12.4	1903	1713	154
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2508</b>	<b>2257</b>	<b>150</b>
		630	33.9	21.4	3106	2796	145
		1000	35.2	35.2	4791	4312	136
		1750	37.5	65.7	7984	7186	122
BXRC-40G2000-D-8x-SE	90	200	30	6	959	863	160
		300	30.4	9.1	1403	1263	154
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>1849</b>	<b>1664</b>	<b>150</b>
		500	31.3	15.6	2273	2046	145
		800	32.5	26	3532	3179	136
		1250	34.1	42.7	5318	4786	125
BXRC-50C2001-B-8x-SE	70	175	32.4	5.7	1148	1033	202
		260	32.9	8.6	1664	1498	194
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2213</b>	<b>1991</b>	<b>189</b>
		450	33.9	15.3	2793	2514	183
		700	35.2	24.6	4226	3804	172
		1250	37.6	47	7171	6454	153
BXRC-50C2001-C-8x-SE	70	250	32.5	8.1	1640	1476	202
		375	33	12.4	2399	2159	194
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>3161</b>	<b>2845</b>	<b>189</b>
		630	33.9	21.4	3915	3523	183
		1000	35.2	35.2	6037	5434	171
		1750	37.5	65.7	10062	9056	153

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux <sup>2</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux <sup>3</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-50C2001-D-8x-SE	70	200	30	6	1209	1088	202
		300	30.4	9.1	1768	1592	194
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2330</b>	<b>2097</b>	<b>189</b>
		500	31.3	15.6	2864	2578	183
		800	32.5	26	4451	4006	171
		1250	34.1	42.7	6702	6032	157
BXRC-50E2001-B-8x-SE	80	175	32.4	5.7	1104	994	195
		260	32.9	8.6	1601	1441	187
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2128</b>	<b>1916</b>	<b>182</b>
		450	33.9	15.3	2687	2418	176
		700	35.2	24.6	4065	3659	165
		1250	37.6	47	6898	6209	147
BXRC-50E2001-C-8x-SE	80	250	32.5	8.1	1577	1420	194
		375	33	12.4	2307	2077	187
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>3041</b>	<b>2737</b>	<b>182</b>
		630	33.9	21.4	3766	3389	176
		1000	35.2	35.2	5808	5227	165
		1750	37.5	65.7	9679	8711	147
BXRC-50E2001-D-8x-SE	80	200	30	6	1163	1047	194
		300	30.4	9.1	1701	1531	186
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2242</b>	<b>2018</b>	<b>182</b>
		500	31.3	15.6	2755	2480	176
		800	32.5	26	4282	3854	165
		1250	34.1	42.7	6447	5803	151
BXRC-50G2001-B-8x-SE	90	175	32.4	5.7	954	859	168
		260	32.9	8.6	1384	1245	162
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>1840</b>	<b>1656</b>	<b>157</b>
		450	33.9	15.3	2322	2090	152
		700	35.2	24.6	3514	3163	143
		1250	37.6	47	5963	5367	127
BXRC-50G2001-C-8x-SE	90	250	32.5	8.1	1364	1227	168
		375	33	12.4	1995	1795	161
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2628</b>	<b>2366</b>	<b>157</b>
		630	33.9	21.4	3255	2930	152
		1000	35.2	35.2	5020	4518	143
		1750	37.5	65.7	8367	7530	127
BXRC-50G2001-D-8x-SE	90	200	30	6	1005	905	168
		300	30.4	9.1	1470	1323	161
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>1938</b>	<b>1744</b>	<b>157</b>
		500	31.3	15.6	2382	2144	152
		800	32.5	26	3701	3331	142
		1250	34.1	42.7	5573	5016	131

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux <sup>2</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux <sup>3</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-57C2001-B-8x-SE	70	175	32.4	5.7	1117	1005	197
		260	32.9	8.6	1619	1457	189
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2153</b>	<b>1937</b>	<b>184</b>
		450	33.9	15.3	2717	2445	178
		700	35.2	24.6	4111	3700	167
		1250	37.6	47	6976	6279	148
BXRC-57C2001-C-8x-SE	70	250	32.5	8.1	1595	1436	196
		375	33	12.4	2333	2100	189
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>3075</b>	<b>2768</b>	<b>184</b>
		630	33.9	21.4	3808	3427	178
		1000	35.2	35.2	5873	5286	167
		1750	37.5	65.7	9789	8810	149
BXRC-57C2001-D-8x-SE	70	200	30	6	1176	1059	196
		300	30.4	9.1	1720	1548	189
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2267</b>	<b>2040</b>	<b>184</b>
		500	31.3	15.6	2787	2508	178
		800	32.5	26	4330	3897	167
		1250	34.1	42.7	6520	5868	153
BXRC-57E2001-B-8x-SE	80	175	32.4	5.7	1061	954	187
		260	32.9	8.6	1537	1384	180
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2044</b>	<b>1840</b>	<b>175</b>
		450	33.9	15.3	2580	2322	169
		700	35.2	24.6	3905	3514	159
		1250	37.6	47	6626	5963	141
BXRC-57E2001-C-8x-SE	80	250	32.5	8.1	1515	1364	187
		375	33	12.4	2216	1995	179
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2920</b>	<b>2628</b>	<b>175</b>
		630	33.9	21.4	3617	3255	169
		1000	35.2	35.2	5578	5020	158
		1750	37.5	65.7	9297	8367	142
BXRC-57E2001-D-8x-SE	80	200	30	6	1117	1005	186
		300	30.4	9.1	1634	1470	179
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2153</b>	<b>1938</b>	<b>174</b>
		500	31.3	15.6	2646	2382	169
		800	32.5	26	4112	3701	158
		1250	34.1	42.7	6192	5573	145
BXRC-65C2001-B-8x-SE	70	175	32.4	5.7	1117	1005	197
		260	32.9	8.6	1619	1457	189
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2153</b>	<b>1937</b>	<b>184</b>
		450	33.9	15.3	2717	2445	178
		700	35.2	24.6	4111	3700	167
		1250	37.6	47	6976	6279	148

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 85°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRC-65C2001-C-8x-SE	70	250	32.5	8.1	1595	1436	196
		375	33	12.4	2333	2100	189
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>3075</b>	<b>2768</b>	<b>184</b>
		630	33.9	21.4	3808	3427	178
		1000	35.2	35.2	5873	5286	167
		1750	37.5	65.7	9789	8810	149
BXRC-65C2001-D-8x-SE	70	200	30	6	1176	1059	196
		300	30.4	9.1	1720	1548	189
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2267</b>	<b>2040</b>	<b>184</b>
		500	31.3	15.6	2787	2508	178
		800	32.5	26	4330	3897	167
		1250	34.1	42.7	6520	5868	153
BXRC-65E2001-B-8x-SE	80	175	32.4	5.7	1073	966	189
		260	32.9	8.6	1555	1400	182
		<b>350</b>	<b>33.4</b>	<b>11.7</b>	<b>2068</b>	<b>1861</b>	<b>177</b>
		450	33.9	15.3	2611	2350	171
		700	35.2	24.6	3951	3556	160
		1250	37.6	47	6704	6033	143
BXRC-65E2001-C-8x-SE	80	250	32.5	8.1	1533	1380	189
		375	33	12.4	2242	2018	181
		<b>500</b>	<b>33.4</b>	<b>16.7</b>	<b>2955</b>	<b>2659</b>	<b>177</b>
		630	33.9	21.4	3659	3293	171
		1000	35.2	35.2	5644	5079	160
		1750	37.5	65.7	9406	8465	143
BXRC-65E2001-D-8x-SE	80	200	30	6	1130	1017	189
		300	30.4	9.1	1653	1488	181
		<b>400</b>	<b>30.9</b>	<b>12.3</b>	<b>2178</b>	<b>1961</b>	<b>177</b>
		500	31.3	15.6	2678	2410	171
		800	32.5	26	4161	3745	160
		1250	34.1	42.7	6265	5639	147

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Electrical Characteristics

**Table 5:** Electrical Characteristics

Part Number	Drive Current (mA)	Forward Voltage Pulsed, $T_c = 25^\circ\text{C}$ (V) <sup>1, 2, 3, 8</sup>			Typical Coefficient of Forward Voltage <sup>4</sup> $\Delta V_f / \Delta T_c$ (mV/ $^\circ\text{C}$ )	Typical Thermal Resistance Junction to Case <sup>5,6</sup> $R_{j-c}$ ( $^\circ\text{C}/\text{W}$ )	Driver Selection Voltages <sup>7</sup> (V)	
		Minimum	Typical	Maximum			$V_f$ Min. Hot $T_c = 105^\circ\text{C}$ (V)	$V_f$ Max. Cold $T_c = -40^\circ\text{C}$ (V)
BXRC-xxx200x-B-8x-SE	350	30.9	33.4	35.9	-10.77	0.22	30.0	36.6
	1250	34.8	37.6	40.4	-12.13	0.34	33.8	41.2
BXRC-xxx200x-C-8x-SE	500	30.9	33.4	35.9	-10.77	0.19	30.0	36.6
	1750	34.7	37.5	40.3	-12.10	0.29	33.7	41.1
BXRC-xxx200x-D-8x-SE	400	28.6	30.9	33.2	-9.97	0.25	27.8	33.9
	1250	31.5	34.1	36.7	-11.00	0.38	30.7	37.4

Notes for Table 5:

- Parts are tested in pulsed conditions,  $T_c = 25^\circ\text{C}$ . Pulse width is 10ms.
- Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
- Bridgelux maintains a tester tolerance of  $\pm 0.10\text{V}$  on forward voltage measurements.
- Typical coefficient of forward voltage tolerance is  $\pm 0.1\text{mV}$  for nominal current.
- Thermal resistance values are based from test data of a 3000K 80 CRI product.
- Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power. The thermal interface material used during testing is not included in the thermal resistance value.
- $V_f$  min hot and max cold values are provided as reference only and are not guaranteed by test. These values are provided to aid in driver design and selection over the operating range of the product.
- This product has been designed and manufactured per IEC 62031:2018. This product has passed dielectric withstand voltage testing at 1140 V. The working voltage designated for the insulation is 70V d.c. The maximum allowable voltage across the array must be determined in the end product application.

# Eye Safety

**Table 6:** Eye Safety Risk Group (RG) Classifications

Part Number	Drive Current (mA)	CCT			
		2700K/3000K	4000K <sup>2</sup>	5000K <sup>3</sup>	6500K <sup>4</sup>
BXRC-xxx200x-B-8x-SE	800	RG1	RG1	RG1	RG1
	1110	RG1	RG1	RG1	RG2
	1250	RG1	RG1	RG2	RG2
BXRC-xxx200x-C-8x-SE	800	RG1	RG1	RG1	RG1
	1110	RG1	RG1	RG1	RG2
	1470	RG1	RG1	RG2	RG2
	1750	RG1	RG2	RG2	RG2
BXRC-xxx200x-D-8x-SE	865	RG1	RG1	RG1	RG1
	1195	RG1	RG1	RG1	RG2
	1250	RG1	RG1	RG2	RG2

Notes for Table 6:

1. Eye safety classification for the use of Bridgelux Vero Series LED arrays is in accordance with specification IEC/TR 62778: Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires.
2. For products classified as RG2 at 4000K, Ethr- 1980 lx.
3. For products classified as RG2 at 5000K Ethr- 1530 lx.
4. For products classified as RG2 at 6500K, Ethr- 1170 lx.
5. Please contact your Bridgelux sales representative for Ethr values at specific drive currents and CCTs not listed.

# Absolute Maximum Ratings

**Table 7:** Maximum Ratings

Parameter	Maximum Rating		
LED Junction Temperature (T <sub>j</sub> )	150°C		
Storage Temperature	-40°C to +105°C		
Operating Case Temperature <sup>1</sup> (T <sub>c</sub> )	105°C		
Soldering Temperature <sup>2</sup>	300°C or lower for a maximum of 6 seconds		
	BXRC-xxx200x-B-8x-SE	BXRC-xxx200x-C-8x-SE	BXRC-xxx200x-D-8x-SE
Maximum Drive Current <sup>3</sup>	1250 mA	1750 mA	1250 mA
Maximum Peak Pulsed Drive Current <sup>4</sup>	1400 mA	1960 mA	1400 mA
Maximum Reverse Voltage <sup>5</sup>	-60V	-60V	-55V


Notes for Table 7:

1. For IEC 62717 requirement, please consult your Bridgelux sales representative.
2. Refer to Bridgelux Application Note AN120: Bridgelux Vero SE Array Design Guide.
3. Arrays may be driven at higher currents however lumen maintenance may be reduced and warranty will not apply.
4. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 20 ms when operating LED Arrays at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where LED Arrays can be driven without catastrophic failures.
5. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.




# Performance Curves


**Figure 1: Vero SE 13B Drive Current vs. Voltage**

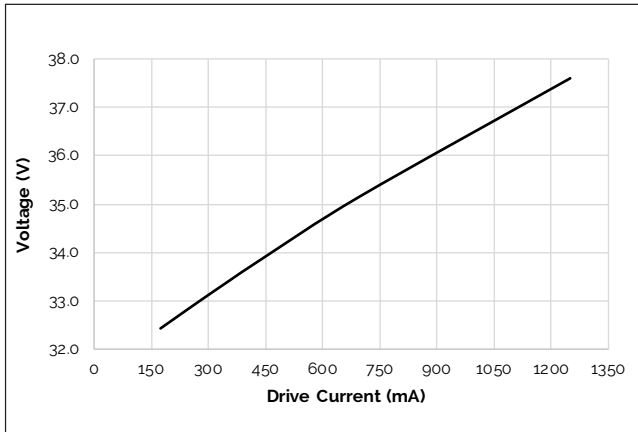


**Figure 2: Vero SE 13C Drive Current vs. Voltage**

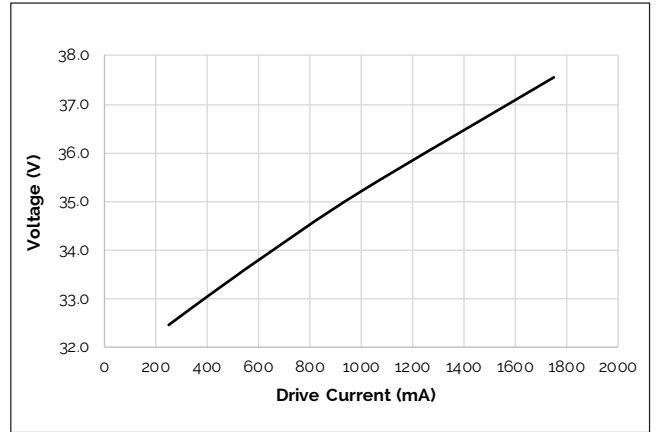


**Figure 3: Vero SE 13D Drive Current vs. Voltage**

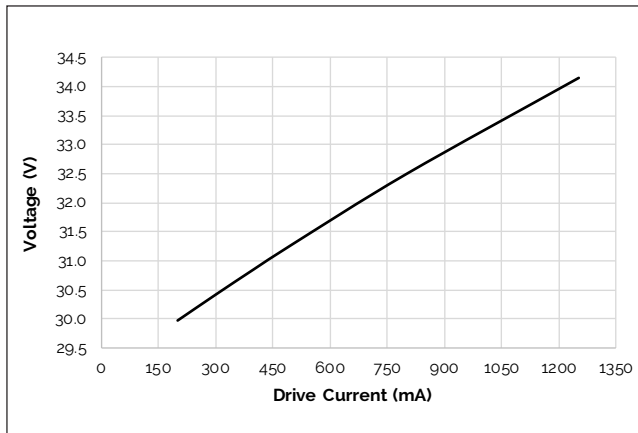


**Figure 4: Vero SE 13B Typical Relative Flux vs. Current**

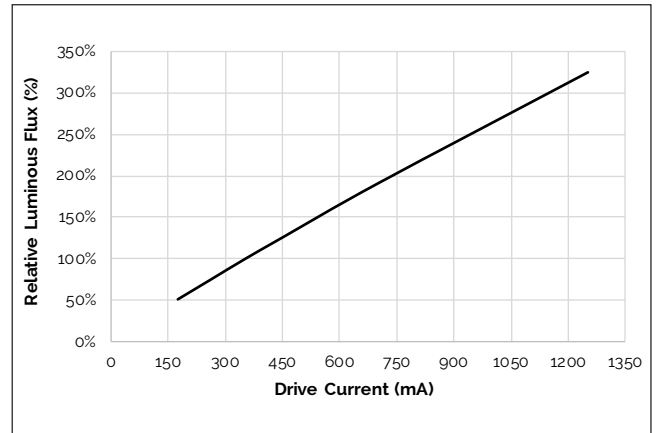

**Figure 5: Vero SE 13C Typical Relative Flux vs. Current**

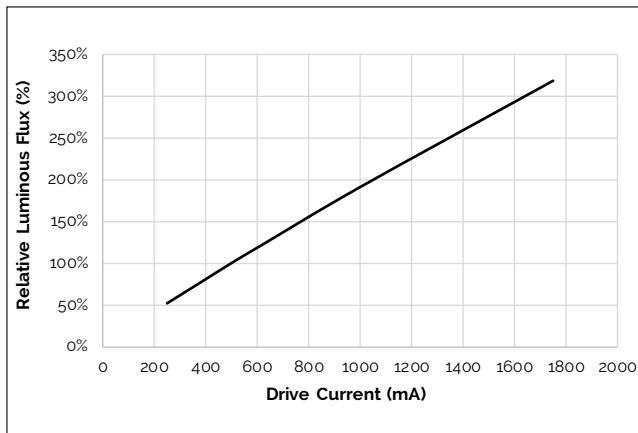

**Figure 6: Vero SE 13D Typical Relative Flux vs. Current**

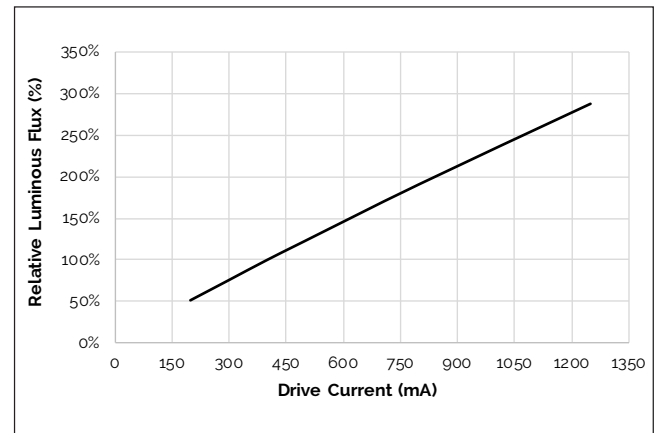

Notes for Figure 1-6:

1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.
2. Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) -  $T_c$  (case temperature) = 25°C.

# Performance Curves

Figure 7: Typical DC Flux vs. Case Temperature

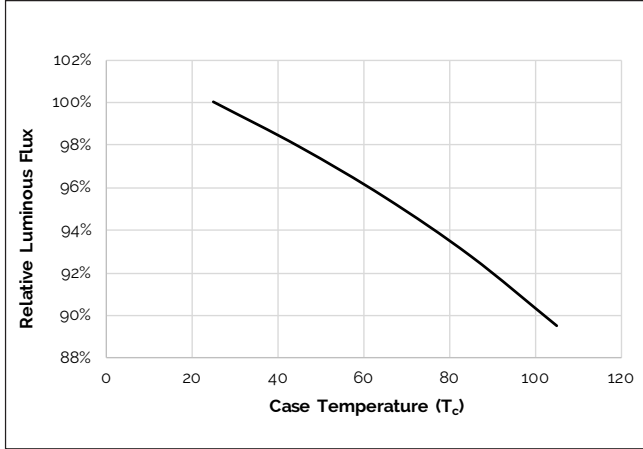


Figure 8: Typical DC ccy Shift vs. Case Temperature


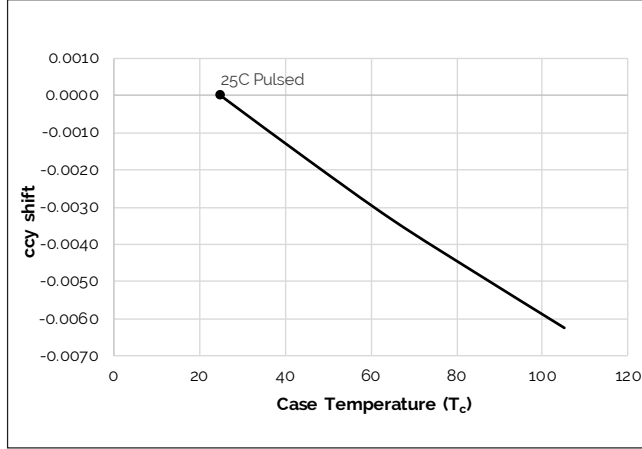



Figure 9: Typical DC ccx Shift vs. Case Temperature

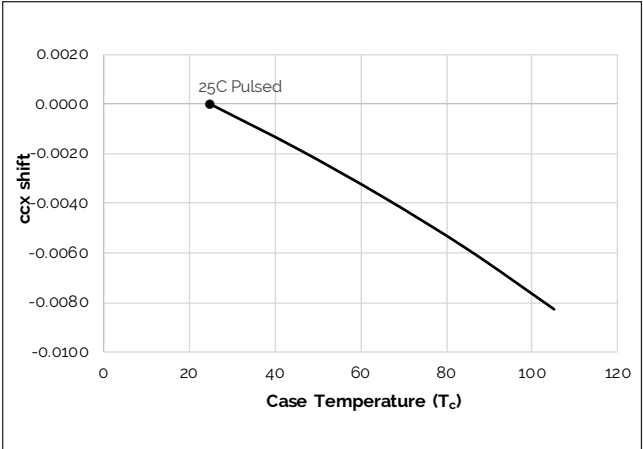

Note for Figures 7-9:  
1. Characteristics shown for Warm White.

# Typical Radiation Pattern


Figure 10: Typical Spatial Radiation Pattern

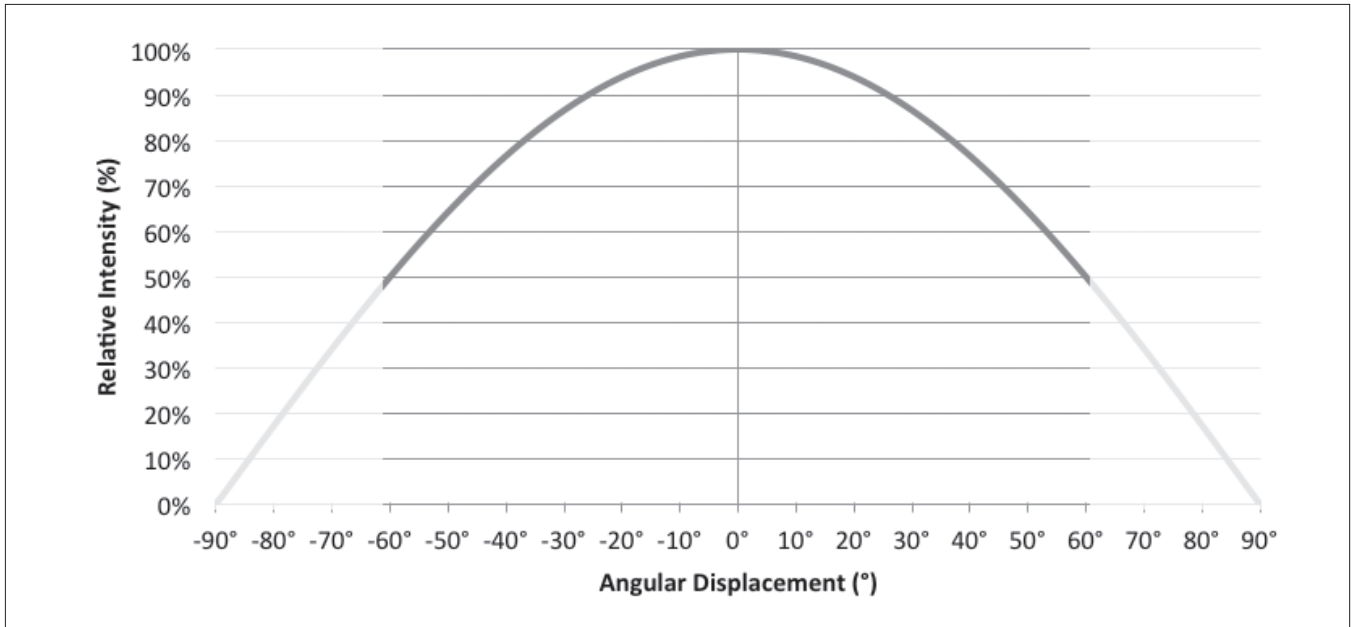

Notes for Figure 10:


1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where intensity is ½ of the peak value.

Figure 11: Typical Polar Radiation Pattern

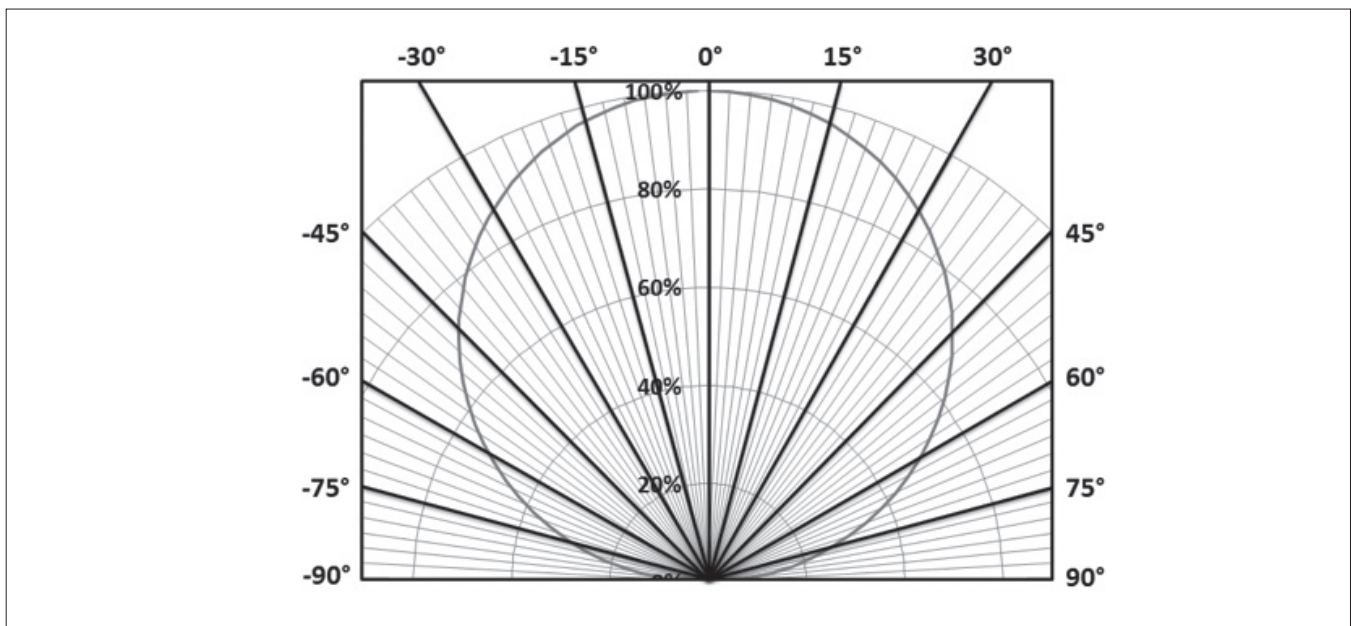

# Typical Color Spectrum

Figure 12: Typical Color Spectrum

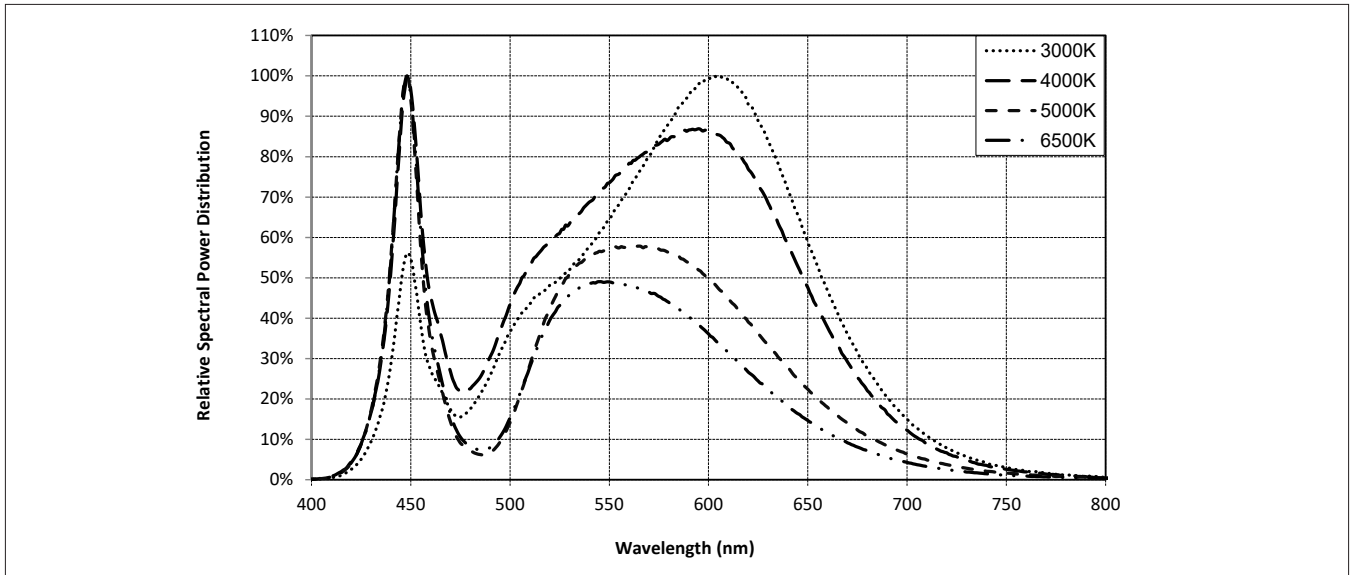


Notes for Figure 12:

1. Color spectra measured at nominal current for  $T_j = T_c = 25^\circ\text{C}$ .
2. Color spectra shown is 3000K and 80 CRI.
3. Color spectra shown is 4000K and 80 CRI.
4. Color spectra shown is 5000K and 70 CRI.
4. Color spectra shown is 6500K and 70 CRI.

# Mechanical Dimensions

**Figure 13: Drawing for Vero SE 13 LED Array**

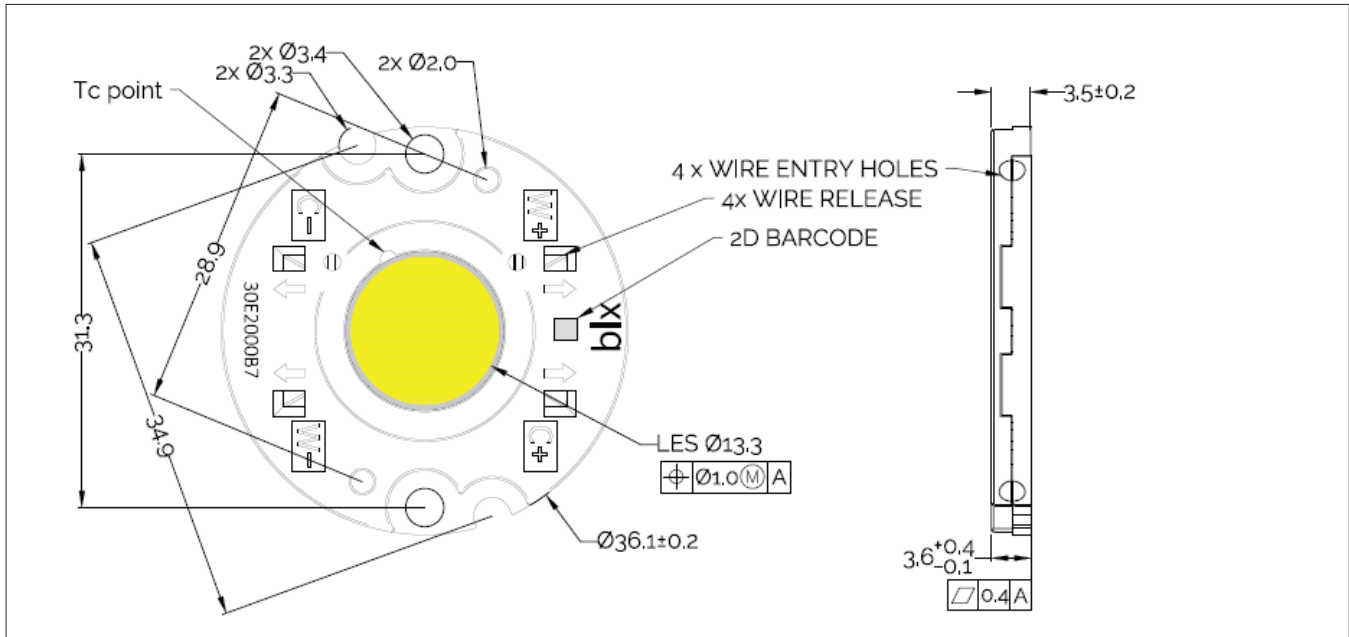


Notes for Figure 13:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are  $\pm 0.15$  mm.
4. Mounting holes (2X) are for M3 screws.
5. Bridgelux recommends two tapped holes for mounting screws with  $31.3 \pm 0.10$  mm center-to-center spacing.
6. Screws with flat shoulders (pan, dome, button, round, truss, mushroom) provide optimal torque control. Do NOT use flat, countersink, or raised head screws.
7. The optical center of the LED Array is nominally defined by the mechanical center of the array to a tolerance of  $\pm 0.2$  mm.
8. Bridgelux maintains a flatness of  $0.10$  mm across the mounting surface of the array.


# Color Binning Information

**Figure 14: Warm and Neutral White Test Bins in xy Color Space**

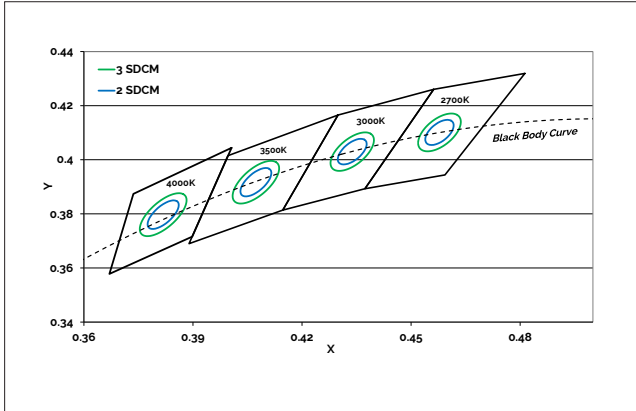

Note: Pulsed Test Conditions,  $T_c = 25^\circ\text{C}$

**Figure 15: Cool White Test Bins in xy Color Space**

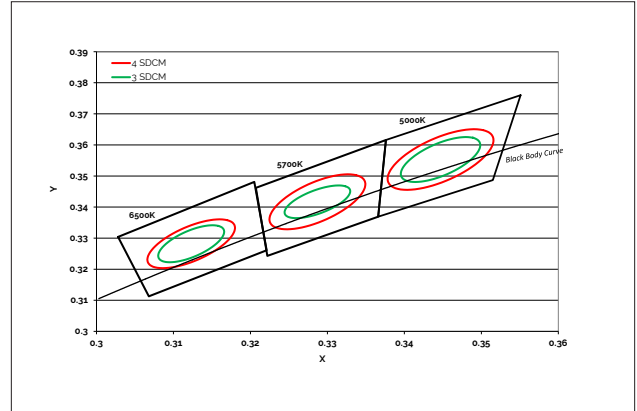

Note: Pulsed Test Conditions,  $T_c = 25^\circ\text{C}$

**Table 8: Warm and Neutral White xy Bin Coordinates and Associated Typical CCT**

Bin Code	2200K	2700K	3000K	3500K	4000K
ANSI Bin (for reference only)	(2207K-2309K)	(2580K - 2870K)	(2870K - 3220K)	(3220K - 3710K)	(3710K - 4260K)
83 (3 SDCM)	(2207K-2309K)	(2651K - 2794K)	(2968K - 3136K)	(3369K - 3586K)	(3851K - 4130K)
82 (2 SDCM)	(2224K-2291K)	(2674K - 2769K)	(2995K - 3107K)	(3404K - 3548K)	(3895K - 4081K)
Center Point (x,y)	(0.5018, 0.4153)	(0.4578, 0.4101)	(0.4338, 0.403)	(0.4073, 0.3917)	(0.3818, 0.3797)

**Table 9: Cool White xy Bin Coordinates and Associated Typical CCT (product is hot targeted to  $T_c = 85^\circ\text{C}$ )**


Bin Code	5000K	5700K	6500K
ANSI Bin (for reference only)	(4745K - 5311K)	(5312K - 6022K)	(6022K - 7042K)
84 (4 SDCM)	(4801K - 5282K)	(5395K- 5970K)	(6200K - 6910K)
83 (3 SDCM)	(4835K-5215K)	(5460K- 5891K)	(6279K -6811K)
Center Point (x,y)	(0.3447, 0.3553)	(0.3287, 0.3417)	(0.3123, 0.3282)

Note for Tables 8-g:

1. Bridgelux maintains a tolerance of +/- 0.007 on x and y color coordinates in the CIE 1931 color Space.

# Packaging and Labeling


Figure 16: Drawing for Vero SE 13 Packaging Tray

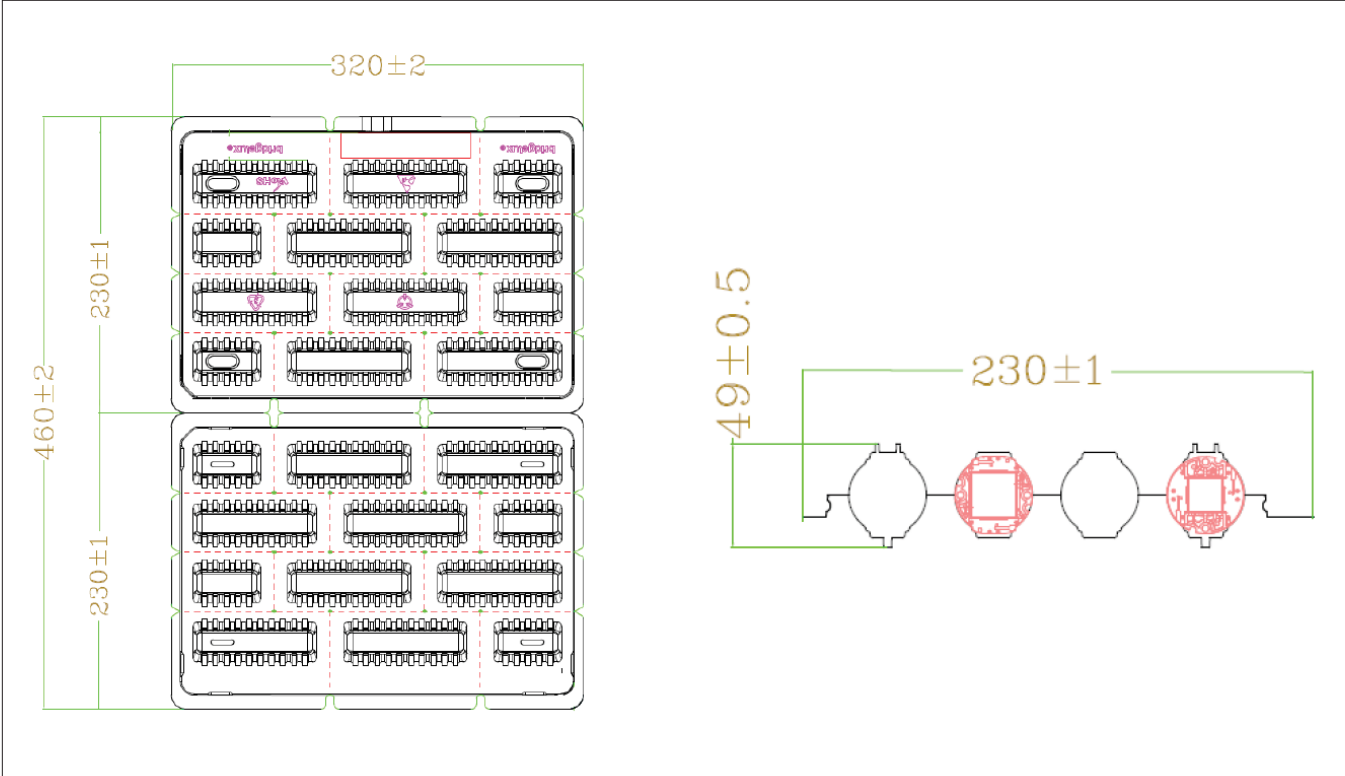

- Notes for Figure 16:
- 1. Dimensions are in millimeters.
  - 2. Drawings are not to scale.

# Packaging and Labeling

**Figure 17: Vero SE Series Packaging and Labeling**

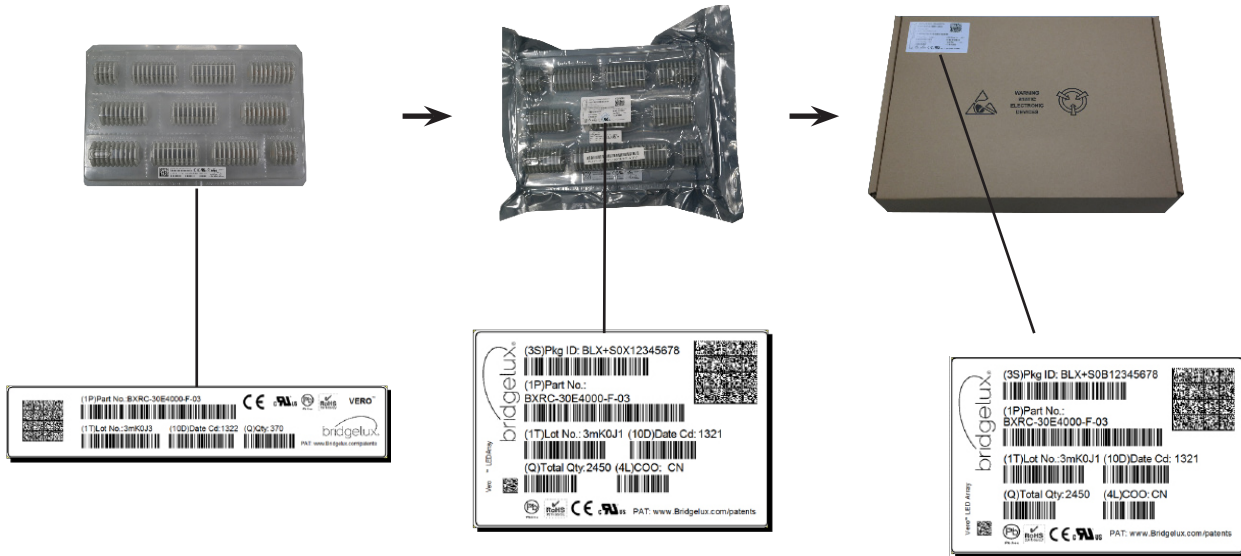

Notes for Figure 17:

1. Each tray holds 100 COBs.
2. Each tray is vacuum sealed in an anti-static bag and placed in its own box.
3. Each tray, bag and box is to be labeled as shown above.

**Figure 18: Vero SE Product Labeling**

Bridgelux COB arrays have laser markings on the back side of the substrate to help with product identification. In addition to the product identification markings, Bridgelux COB arrays also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the COB array.



Customer Use- 2D Barcode  
Scannable barcode provides product part number and other Bridgelux internal production information.

Customer Use- Product part number

**30E2000C 83 2F**

Customer Use- V<sub>f</sub> Bin Code  
included to enable greater luminaire design flexibility. Refer to ANg2 for bin code definitions.



# Design Resources

## Application Notes

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the Vero product family of LED array products. For all available application notes visit [www.bridgelux.com](http://www.bridgelux.com).

## Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit [www.bridgelux.com](http://www.bridgelux.com).

## 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux Vero LED arrays are available in both IGS and STEP formats. Please contact your Bridgelux sales representative for assistance.

## LM80

LM80 testing has been completed and the LM80 report is now available. Please contact your Bridgelux sales representative for LM-80 report.

# Precautions

## CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED array. Please consult Bridgelux Application Note AN120 for additional information.

## CAUTION: RISK OF BURN

Do not touch the Vero LED array during operation. Allow the array to cool for a sufficient period of time before handling. The Vero LED array may reach elevated temperatures such that could burn skin when touched.

## CAUTION

### CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the LED array or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the LED array.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area). Optical devices may be mounted on the top surface of the plastic housing of the Vero LED array. Use the mechanical features of the LED array housing, edges and/or mounting holes to locate and secure optical devices as needed.

# Disclaimers

## MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

## STANDARD TEST CONDITIONS

Unless otherwise stated, array testing is performed at the nominal drive current.

# About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

**For more information about the company, please visit**  
**bridgelux.com**  
**twitter.com/Bridgelux**  
**facebook.com/Bridgelux**  
**youtube.com/user/Bridgelux**  
**linkedin.com/company/bridgelux-inc-\_2**  
**WeChat ID: BridgeluxInChina**



46410 Fremont Boulevard  
Fremont, CA 94538 U.S.A.  
Tel (925) 583-8400  
[www.bridgelux.com](http://www.bridgelux.com)

© 2023 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux, the Bridgelux stylized logo design, Vero, V Series and V Series HD are registered trademarks, and Decor Series is a trademark of Bridgelux, Inc. All other trademarks are the property of their respective owners.

Bridgelux Gen 8 Vero SE 13 Array Series Product Data Sheet DS431 Rev. F (07/2023)