

Vesta® Series Arrays

Bridgelux Differentiation

- 15+ years of driving LED industry transformation
- Vertically integrated global supply chain
- It's in our DNA to solve customers' problems
- Fully customizable platforms, including LED layouts, and color points




Features

- Comprehensive line of Dim-To-Warm and Tunable White arrays
- Phosphor dispensed and CSP arrays for premium applications
- Proprietary packaging technology to enhance near field color uniformity
- Thrive tunable spectrum to closely match natural light

Benefits

- Superior color dimming transition and color mixing
- Compact system design
- Phosphor dispensed products suitable precision optics down to 15 degrees
- Full consistent spectrum with fewer spectral spikes

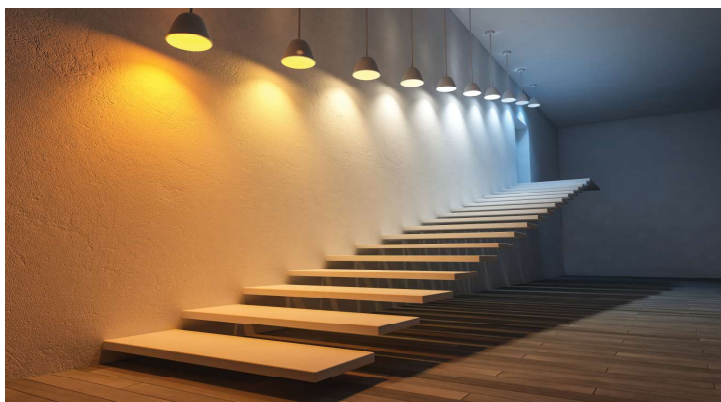

Applications

- Retail
- Hospitality
- Architectural & Museums
- Residential
- Healthcare
- Education
- Entertainment
- Food



Product	LES Dimensions	Tunable/Dimming CCT Range	CRI	SDCM	Flux ¹ (lm)	Current (mA)	Voltage ¹ (V)	Efficacy ¹ (lm/W)	Technology
Dim-To-Warm Array	6 mm (6W)	1800K - 2700/3000K ¹	90, 95	3	640	350	17.0	108	Dispensed Phosphor
	9 mm (6 W)				685	350	17.0	115	
	9 mm (12 W)				1360	350	33.8	115	
	13 mm (21W)				2315	600	33.5	115	
	15 mm (33 W)				3725	950	34.1	115	
Tunable White Array	9 mm (12 W)	2700K - 5000K ²	90	3	1385	700	18.0	106	CSP
	13 mm (25 W)				2750	700	36.0	106	
Tunable White Array	6 mm (6 W)	2700K - 5000/6500K ²	90	3	600	150	36.0	111	Dispensed Phosphor
	9 mm (9 W)				1800 - 3000/4000K ²	90, Thrive	3	1177	
	13 mm (18 W)	2700K - 5000/6500K ²	2312	500	36.0			128	
	15 mm (21 W)	2700K - 5000/6500K ²	90	3	2954	650	35.5	128	
	18 mm (25 W)				4028	900	35.5	128	
	22 mm (44 W)				6106	900	53.0	128	
29 mm (54 W)	7043				1050	53.0	128		

Notes:

1. All measurements are at T_c = 25°C, 90 CRI, and the highest rated CCT
2. All measurements are at T_c = 85°C, 90 CRI, and the highest rated CCT

© 2020 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux, the Bridgelux stylized logo design, and Vesta are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners. The information contained in this sell sheet is not a substitute for the information provided in the actual product data sheets.

Bridgelux Vesta Series Arrays Sell Sheet Rev. D (02/2020)



For more information:
bridgelux.com/products/vesta-series



Vesta® Series Linear Modules

Bridgelux Differentiation

- It's in our DNA to solve customers' problems
- 15+ years of driving LED industry transformation
- Vertically integrated global supply chain
- Fully customizable platforms, including board shapes, LED layouts, and color points

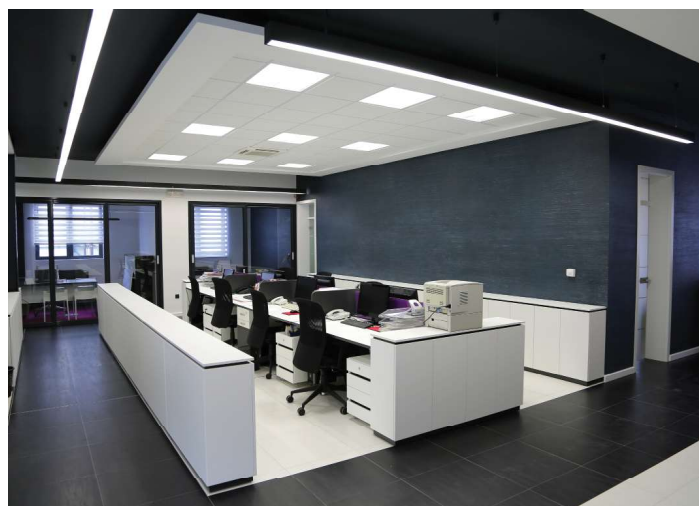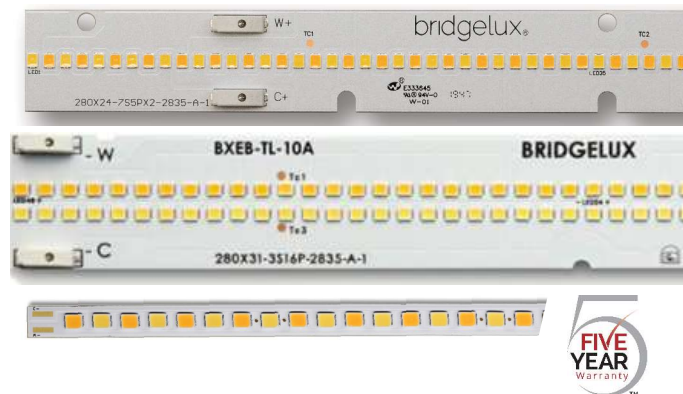

Features & Benefits

- Linear SMD based tunable white modules ideal for selectable CCT or human centric lighting applications
- New single SMD row modules in 280mm, 560mm, and 1120mm with multiple CCT ranges and CRIs
- New Thrive white point options, engineered to match the spectra of natural light
- New high efficiency options achieve 200 lm/W at 80 CRI
- Drop in replacement for 2x2 panel lights and 2x4 troffers
- All modules have Zhaga compatible form factors with poke-in connectors (except Edge)
- All modules capable of 2x current overdrive
- Plug & Play with Vesta Flex TW drivers & control modules

Product Configuration	Dimensions	CCT Tuning Range	CRI	Flux* (lm)	Current (mA)	Voltage* (V)	Efficacy* (lm/W)	SDCM
Edge (1 SMD Row)	570mm x 6mm	2700K-5000K	90	2730	600	34.6	132	3
Linear (1 SMD Row)	280mm x 24mm	1800K-3000K 1800K-4000K 2700K-5000K 2700K-6500K	80, 90, Thrive	1320	375	19.9	177	3
	560mm x 24mm			2640				
	1120mm x 24mm			5280	750	39.8		
Linear (2 SMD Rows)	280mm x 31mm	2700K-5000K 2700K-6500K	80, 90, Thrive	1850	500	19.3	192	3
	560mm x 31mm			3700				
	1120mm x 31mm			7400	1000	38.6		

* All data is at 5000K, 80 CRI, and T_c=25°C