

# Bridgelux® Vesta® Series Tunable White HD TW 9mm Array

Product Data Sheet DS1752





# Product Selection Guide

The following product configurations are available:

**Table 1:** Selection Guide, Measurement Data( $T_j = T_c = 25^\circ\text{C}$ )

Part Number	Nominal CCT <sup>1</sup> $T_c=25^\circ\text{C}$ (K)	CRI <sup>2</sup> $T_c=85^\circ\text{C}$	Nominal Drive Current, per channel (mA)	Typical $V_f$ <sup>3</sup> $T_c=25^\circ\text{C}$ (V)	Typical Power $T_c=25^\circ\text{C}$ (W)	Typical Pulsed Flux <sup>3,4,5</sup> $T_c=25^\circ\text{C}$ (lm)	Typical Efficacy $T_c=25^\circ\text{C}$ (lm/W)	Minimum Pulsed Flux <sup>8</sup> $T_c=25^\circ\text{C}$ (lm)
BXRV-TR-1840G-10D0-A-3X	1800	90	500	34.2	171	1335	78	1202
	4000	90	500	34.2	171	2017	118	1815
BXRV-TR-2765G-10D0-A-3X	2700	90	500	34.2	171	1721	101	1549
	6500	90	500	34.2	171	2140	125	1926

**Notes for Table 1:**

- Nominal CCT as defined by ANSI C78.377-2011.
- CRI values are minimums; the minimum CRI value is 90 and the minimum Rg value is 50. Bridgelux maintains a  $\pm 3$  tolerance on Rg values.
- Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) -  $T_c$  (case temperature) =  $25^\circ\text{C}$ .
- Typical performance values are provided as a reference only and are not a guarantee of performance.
- Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at  $85^\circ\text{C}$ . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at pulsed nominal test current are guaranteed by 100% test.

# Product Selection Guide

The following product configurations are available:

**Table 2:** Selection Guide, Measurement Data ( $T_j = T_c = 85^\circ\text{C}$ )

Part Number	Nominal CCT <sup>1</sup> $T_c = 85^\circ\text{C}$ (K)	CRI <sup>2</sup> $T_c = 85^\circ\text{C}$	Nominal Drive Current, per channel (mA)	Typical $V_f$ <sup>3</sup> $T_c = 85^\circ\text{C}$ (V)	Typical Power $T_c = 85^\circ\text{C}$ (W)	Typical Pulsed Flux <sup>3,4,5</sup> $T_c = 85^\circ\text{C}$ (lm)	Typical Efficiency $T_c = 85^\circ\text{C}$ (lm/W)	Minimum Pulsed Flux <sup>8</sup> $T_c = 85^\circ\text{C}$ (lm)
BXRV-TR-1840G-10Do-A-3X	1800	90	500	33.1	16.6	1138	69	1024
	4000	90	500	33.1	16.6	1738	105	1564
BXRV-TR-2765G-10Do-A-3x	2700	90	500	33.1	16.6	1488	90	1339
	6500	90	500	33.1	16.6	1839	111	1655

**Notes for Table 2:**

- Nominal CCT as defined by ANSI C78.377-2011.
- CRI values are minimums, the minimum CRI value is 90 and the minimum Rg value is 50. Bridgelux maintains a  $\pm 3$  tolerance on Rg values.
- Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) -  $T_c$  (case temperature) =  $85^\circ\text{C}$ .
- Typical performance values are provided as a reference only and are not a guarantee of performance.
- Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at  $85^\circ\text{C}$ . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at pulsed nominal test current are guaranteed by 100% test.


# European Product Registry for Energy Labeling

The European Product Registry for Energy Labeling (EPREL) is defined in the EU Regulation 2017/1369 to provide information about a product's energy efficiency to consumers. Together with Energy Labeling Regulation ELR (EU) 2019/2015, which was amended by regulation (EU) 2021/340 for energy labelling of light sources, manufacturers are required to declare an energy class based on key technical specifications from each of their product and register it in an open data base managed by EPREL. It is now a legal requirement for a vendor of light sources to upload information about their products into the EPREL database before placing these products on the market in the EU.

Table 3 provides a list of part numbers that are in compliance with EPREL regulations and are currently listed in the EPREL database.

At Bridgelux, we are fully committed to supplying products that are compliant with pertinent laws, rules, and obligation imposed by relevant government bodies including the ELR regulation. Customers can use these products with full confidence for any projects that fall under the EPREL requirement.

**Table 3:** Table of products registered in the European Product Registry for Energy Labeling (EPREL)

Part Number	CCT (K)	CRI	Current <sup>3</sup> (mA)	Voltage <sup>3</sup> (V)	Useful Flux <sup>2</sup> $\Phi_{\text{useful}}$ Tc=85C (lm)	Power (W)	Efficacy (lm/W)	Energy Efficiency Class <sup>4</sup>	Registration No	URL <sup>1</sup>
BXRV-TR-1840G-10D0-A-33										
BXRV-TR-2765G-10D0-A-33	6500	90	800	33.69	2913	27	108.1	F	2229668	<a href="https://eprelec.europa.eu/qr/2229668">https://eprelec.europa.eu/qr/2229668</a>

Notes for Table 3:

1. The performance data in this table is a subset of the data that was submitted to EPREL for obtaining the energy class listed here. For accessing a complete set of technical documentation of Bridgelux registered products in the EPREL database, please visit one of the hyperlinks listed above.
2. For a definition of useful luminous flux ( $\Phi_{\text{useful}}$ ), please see the ELR regulations at <https://tinyurl.com/4b6zvt4m>.
3. For information on performance values at alternative drive conditions, please refer to the Product Selection Guide, Absolute Maximum Rating Table and Performance Curves in this data sheet.
4. EPREL requires a symbol for displaying the energy classification of a product in marketing literature. This symbol consists of a letter stating a product's energy efficiency class inside a specific arrow logo as defined by EPREL.
5. All products listed here must be disposed as e-waste according to the guidelines in the country in which the product is used.

# Electrical Characteristics

**Table 4:** Electrical Characteristics

Part Number	CCT Channel (K)	Nominal Drive Current (mA)	Forward Voltage Pulsed, $T_c = 25^\circ\text{C}$ (V) <sup>1,2,3</sup>			Typical Temperature Coefficient of Forward Voltage <sup>4</sup> $\Delta V_f / \Delta T_c$ (mV/ $^\circ\text{C}$ )	Driver Selection Voltages <sup>6</sup> (V)	
			Minimum	Typical	Maximum		$V_f$ Min. Hot $T_c = 105^\circ\text{C}$ (V)	$V_f$ Max. Cold $T_c = -40^\circ\text{C}$ (V)
BXRV-TR-xxxxX-10D0-A-3x	1800/2700	500	32.1	34.2	36.2	-12.7	31.1	37.0
	4000/6500	500	32.1	34.2	36.2	-14.5	31.1	37.2

Notes for Table 4:

- Parts are tested in pulsed conditions,  $T_c = 25^\circ\text{C}$ . Pulse width is 10ms.
- Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
- Bridgelux maintains a tester tolerance of  $\pm 0.10\text{V}$  on forward voltage measurements.
- Typical temperature coefficient of forward voltage tolerance is  $\pm 0.1\text{mV}$  for nominal current.
- Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power. The thermal interface material used during testing is not included in the thermal resistance value.
- $V_f$  min hot and max cold driver selection voltages are provided as reference only and are not guaranteed by test. These values are provided to aid in driver design and selection over the operating range of the product.

# Absolute Maximum Ratings

**Table 5:** Maximum Ratings


Parameter	Maximum Rating	
LED Junction Temperature ( $T_j$ )	125°C	
Storage Temperature	-40°C to 105°C	
Operating Case Temperature ( $T_c$ ) <sup>1,2</sup> For Tunable White Dual-channel drive	85°C	
Operating Case Temperature ( $T_c$ ) <sup>1,2</sup> For Single-channel drive	105°C	
Soldering Temperature <sup>3</sup>	350°C or lower for a maximum of 3 seconds with electric soldering iron	
Maximum Total Drive Current <sup>5</sup>	800mA	
	Channel 1	Channel 2
	Warm White	Neutral/Cooler White
Maximum Drive Current Per Channel <sup>4,5</sup>	800mA	
Maximum Peak Pulsed Drive Current <sup>6</sup>	1000mA	

Notes for Table 5:


- For IEC 62717 requirement, please contact Bridgelux Sales Support.
- Refer to the Derating Curves for Current vs Case Temperature, Figures 8.
- See Bridgelux Application Note AN101 for more information.
- Lumen maintenance and lifetime predictions are valid for drive current and case temperature conditions used for LM-80 testing as included in the applicable LM-80 test report. Contact your Bridgelux sales representatives for the LM-80 report.
- Maximum Drive Current is maximum combined drive currents between both 2700K and 6500K channels. For example, if 800mA is applied to one channel, no current may be applied to the other channel of the array. If 300mA is applied to one channel, then a maximum of 500mA can be applied to the other channel.
- Bridgelux recommends a maximum duty cycle of 10% and pulse width of 20ms when operating LED arrays at the maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where the LED array can be driven without catastrophic failures.

# Performance Curves


**Figure 1: Forward Voltage vs. Forward Current,  $T_c=25^\circ\text{C}$**

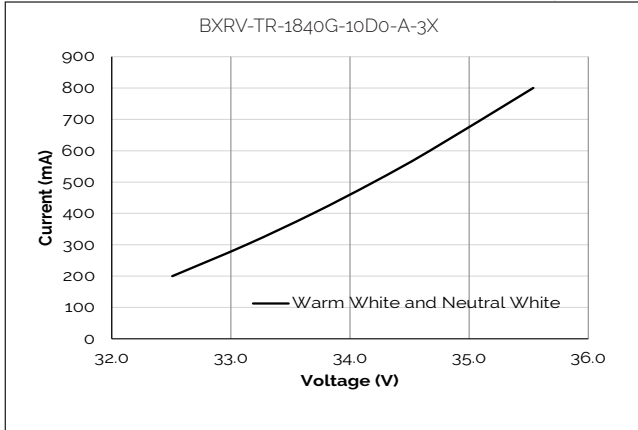


**Figure 2: Relative Flux vs. Drive Current,  $T_c=25^\circ\text{C}$**

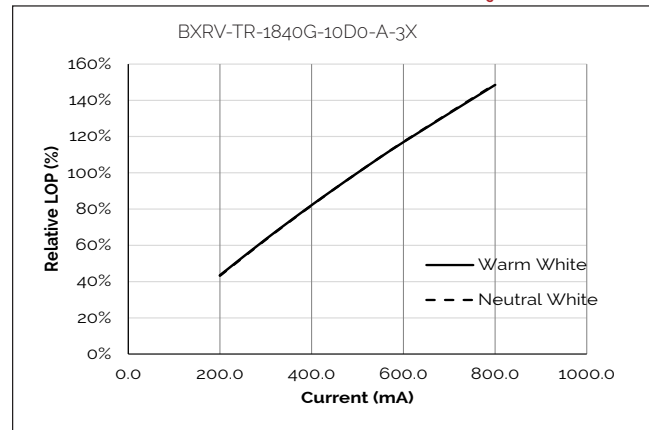


**Figure 3: Relative Flux vs. Case Temperature**

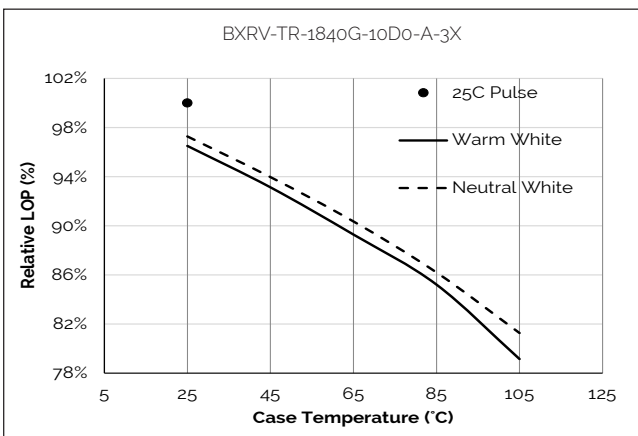


**Figure 4: Relative Voltage vs. Case Temperature**

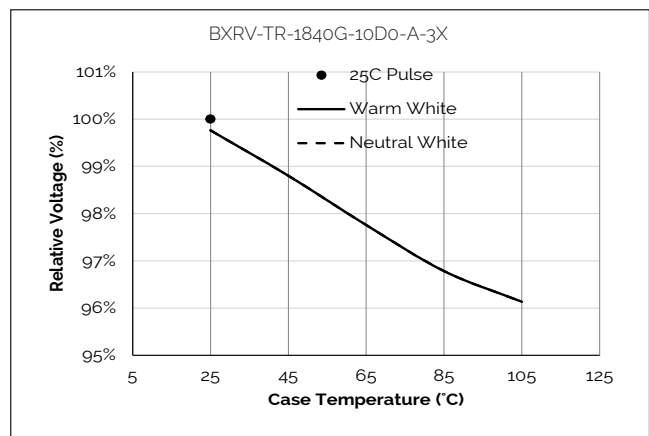

**Figure 5: CCT vs. Relative Current**

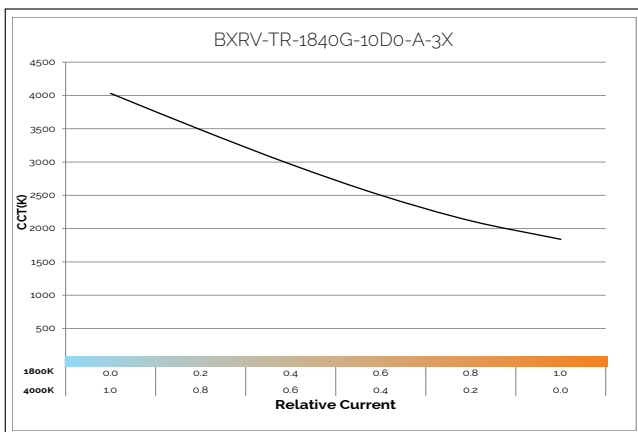


**Figure 6: Relative Flux vs. Relative Current**

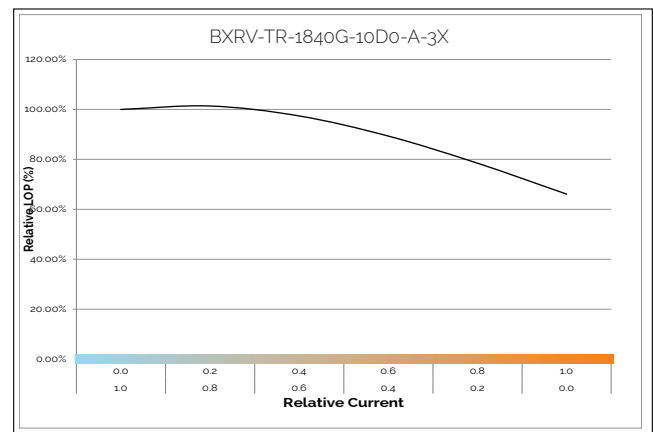


# Performance Curves


**Figure 7: Forward Voltage vs. Forward Current,  $T_c=25^\circ\text{C}$**

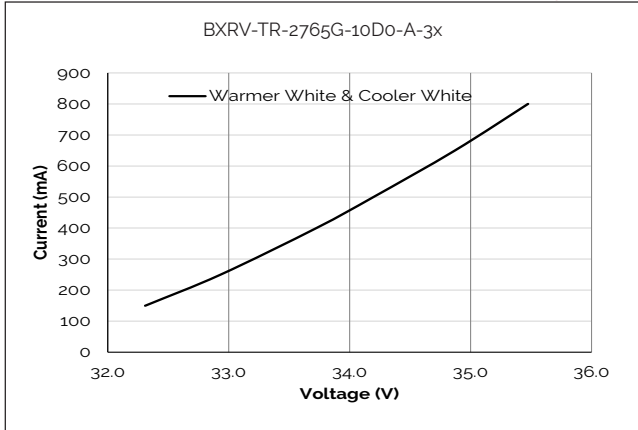


**Figure 8: Relative Flux vs. Drive Current,  $T_c=25^\circ\text{C}$**

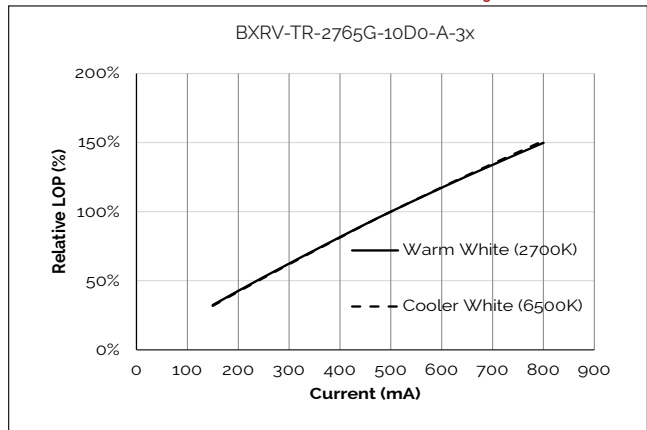


**Figure 9: Relative Flux vs. Case Temperature**

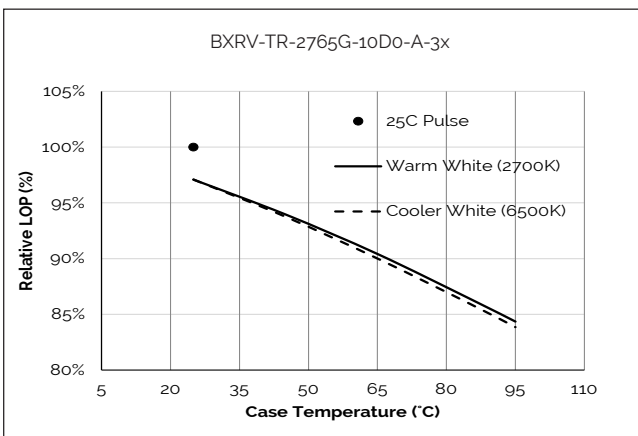


**Figure 10: Relative Voltage vs. Case Temperature**

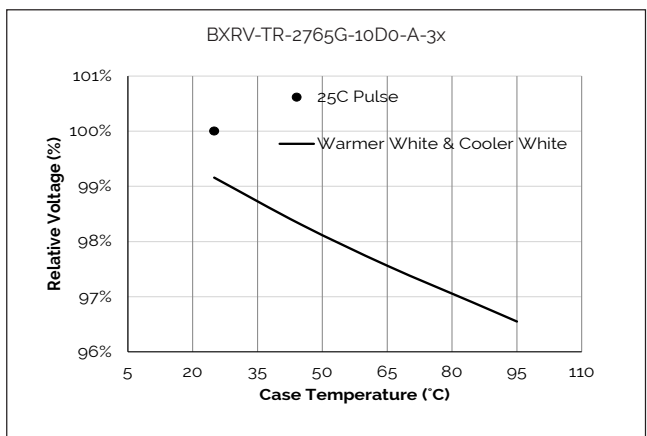

**Figure 11: CCT vs. Relative Current**

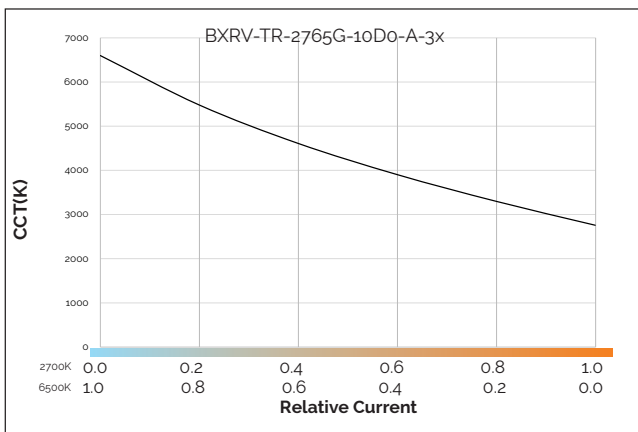

**Figure 12: Relative Flux vs. Relative Current**

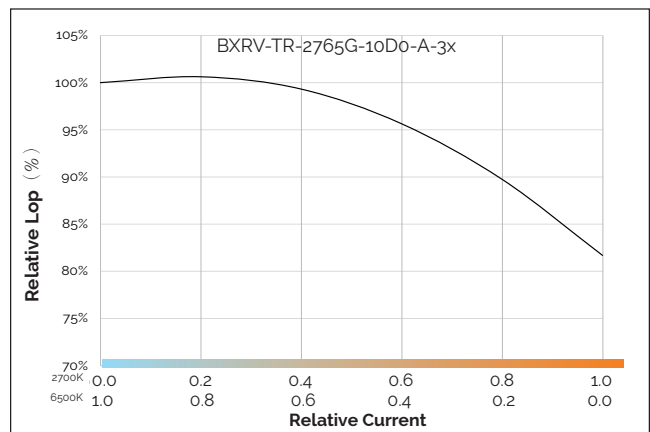

# Performance Curves

Figure 13: CCT Tuning Range, Tc=85C

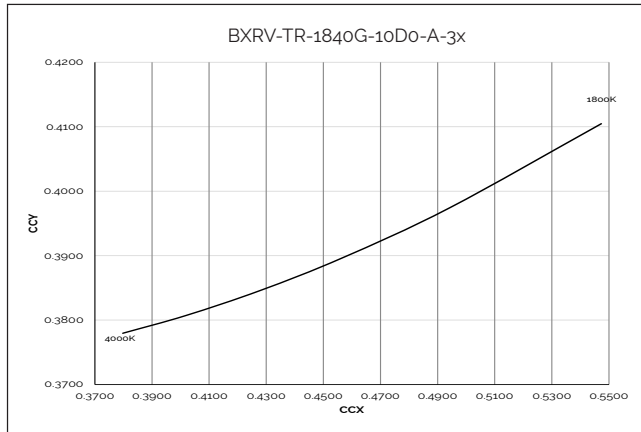


Figure 13: CCT Tuning Range, Tc=85C



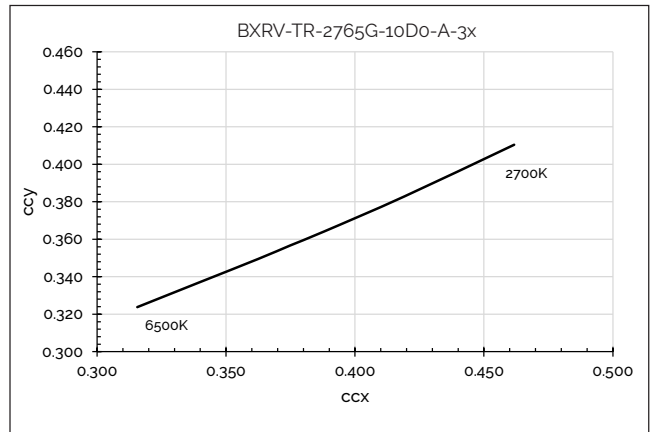


Figure 14: Derating Curve

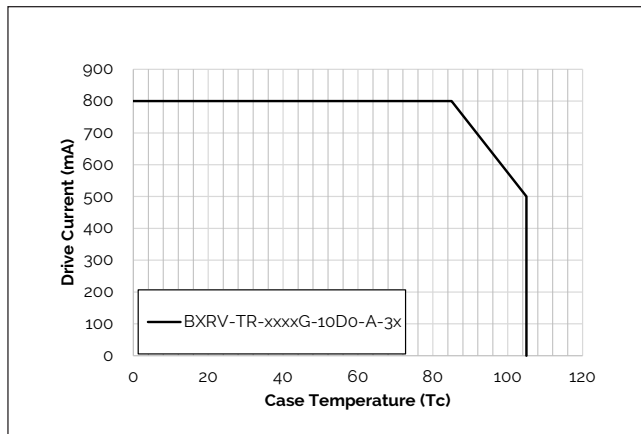

# Typical Radiation Pattern


**Figure 15: Typical Spatial Radiation Pattern**

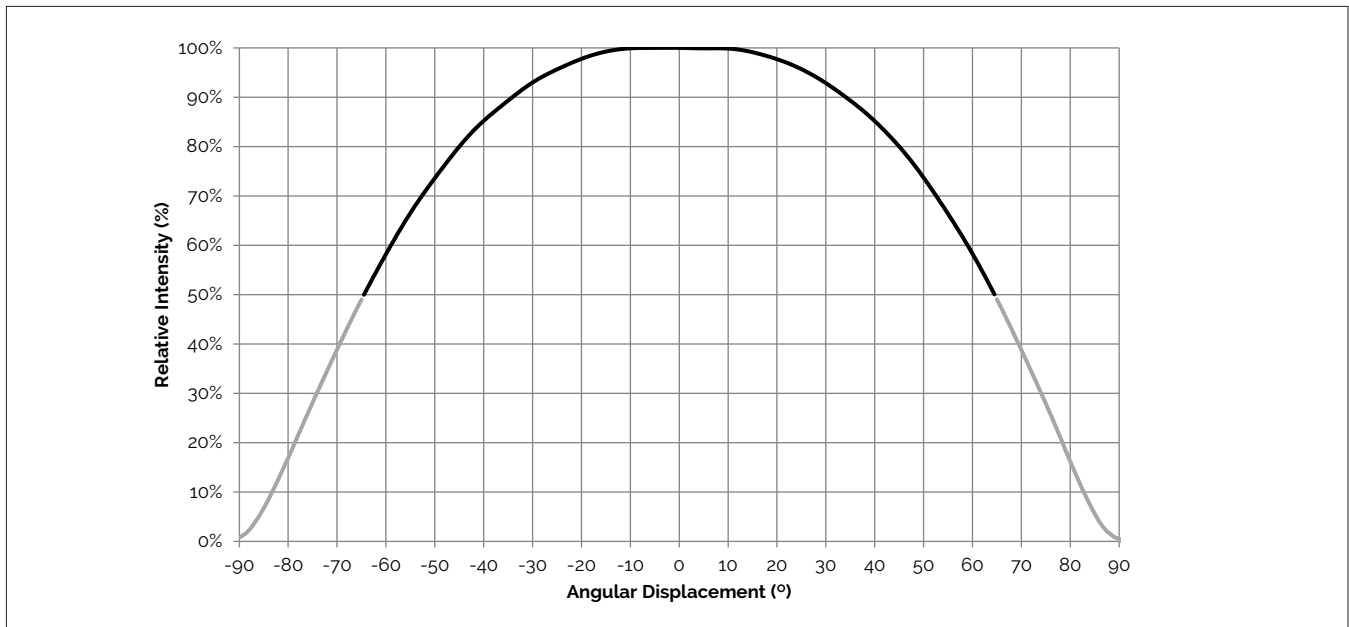

Notes for Figure 15:


1. Typical viewing angle is 130°.
2. The viewing angle is defined as the off axis angle from the centerline where  $I_v$  is  $\frac{1}{2}$  of the peak value.

**Figure 16: Typical Polar Radiation Pattern**

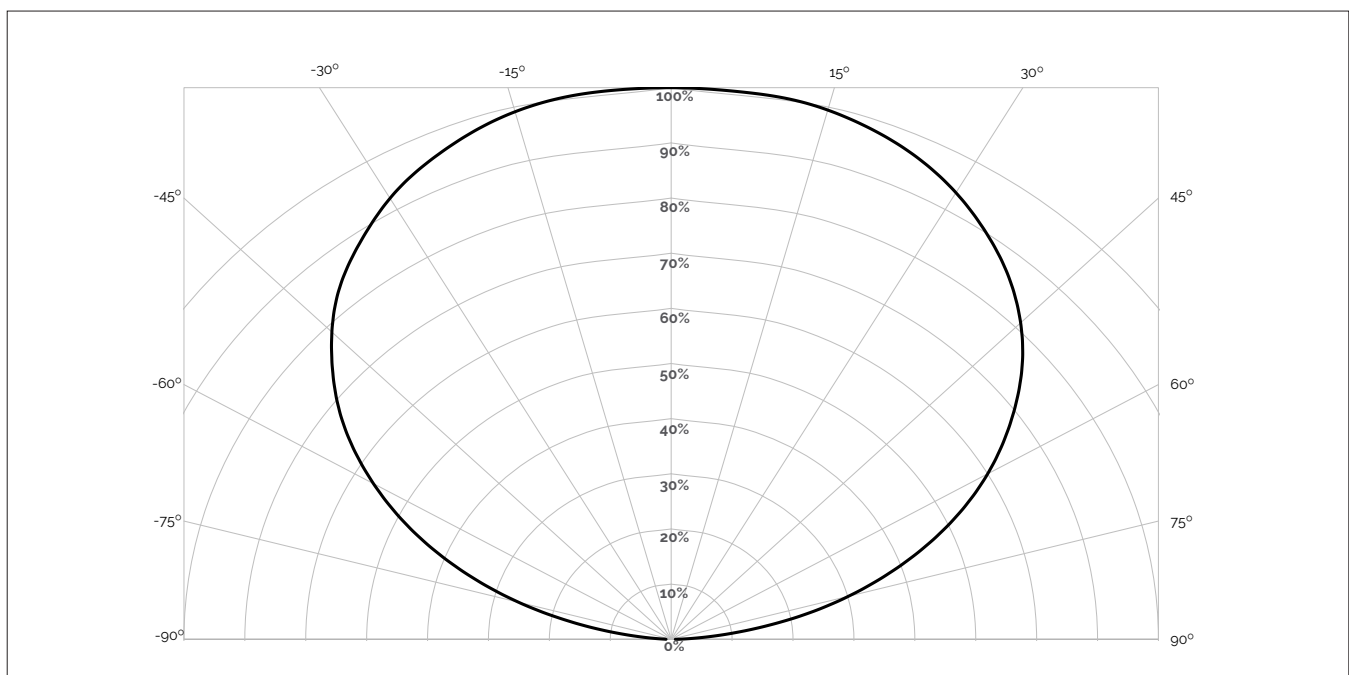

# Typical Color Spectrum


Figure 17: 1800K-4000K with CRI90

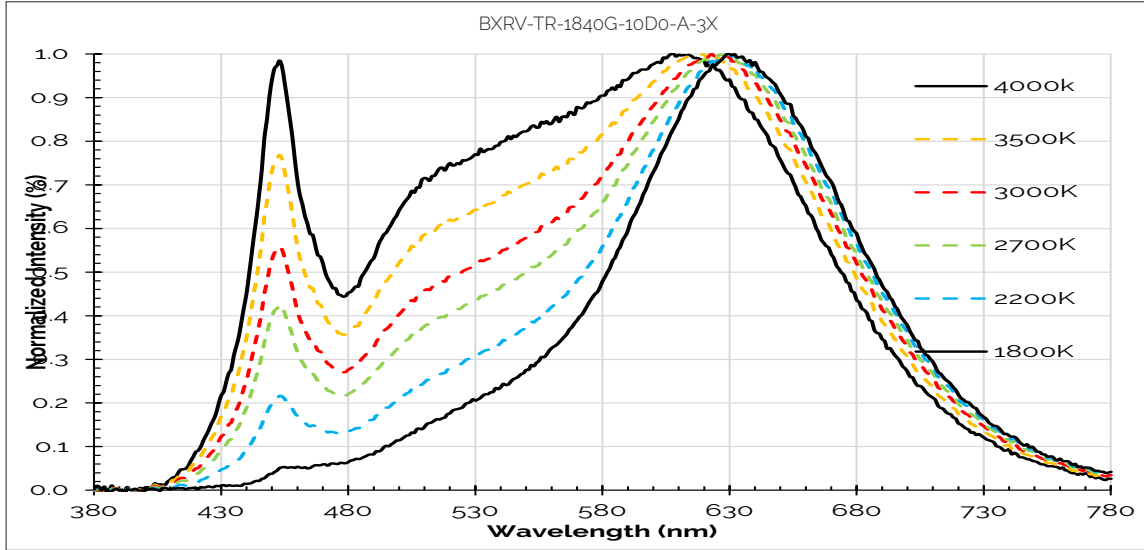

Note for Figure 17:

- 1. Color spectra measured at nominal current and  $T_c = 85^\circ\text{C}$ .

Figure 18: 2700K - 6500K with 90 CRI

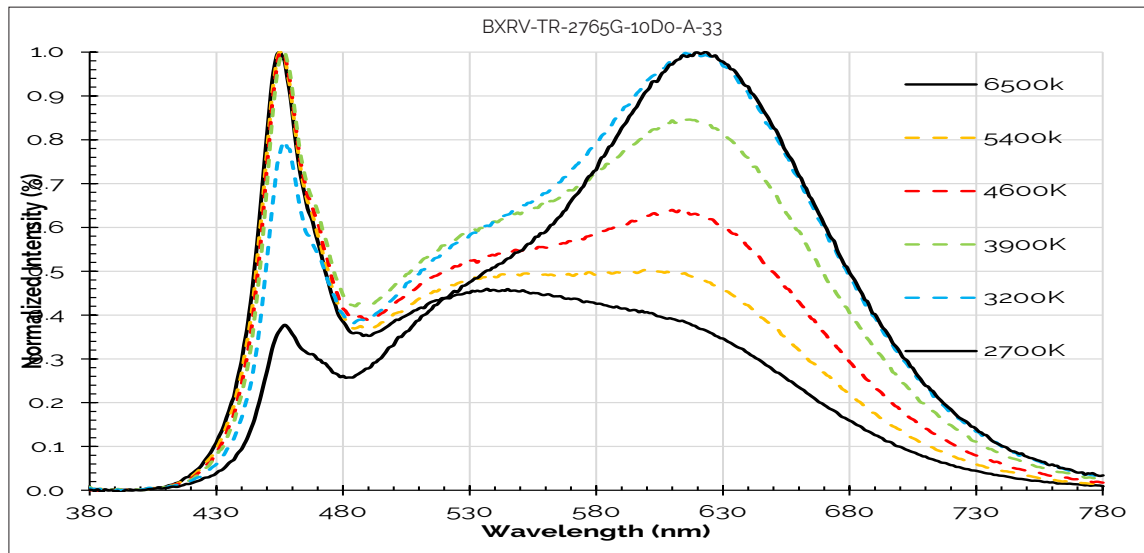


Note for Figure 18:

- 1. Color spectra measured at nominal current and  $T_c = 85^\circ\text{C}$ .

# Mechanical Dimensions

**Figure 19: Mechanical Drawing Specifications**

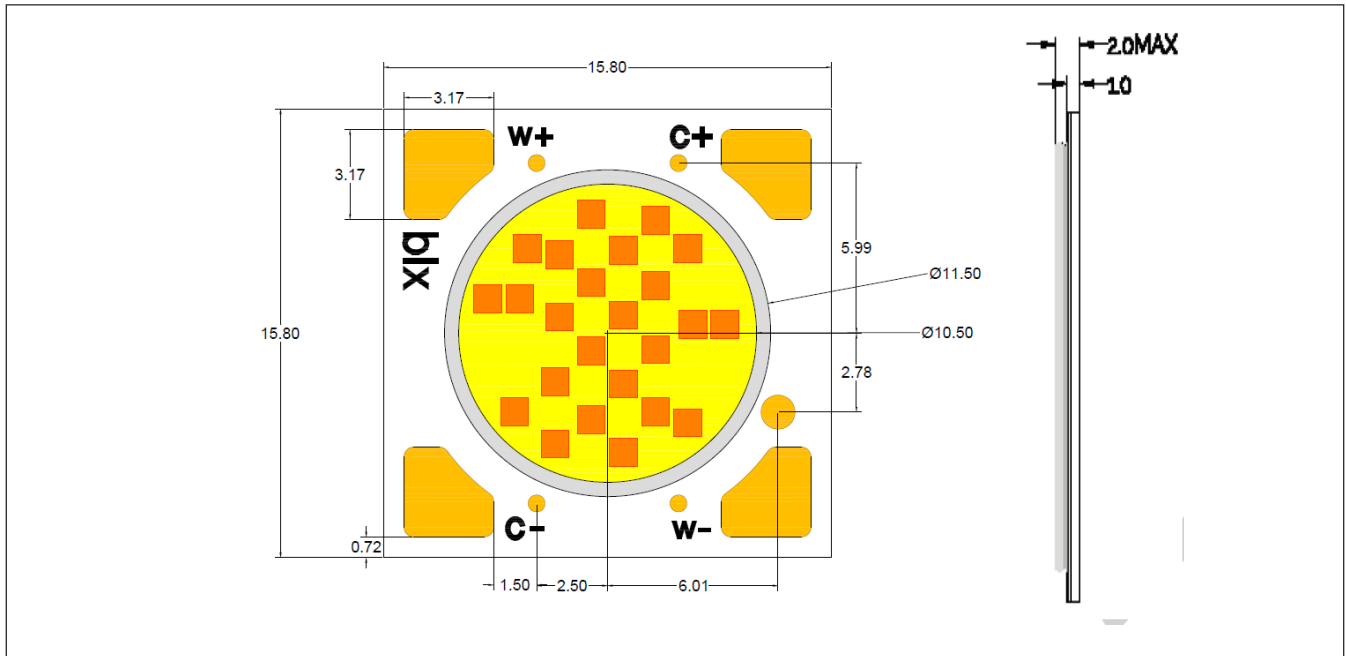


Notes for Figure 19:

1. Solder pads are labeled "+" to denote positive polarity and "-" to denote negative polarity. Solder pads have a gold surface finish.
2. Drawings are not to scale.
3. Drawing dimensions are in millimeters.
4. Unless otherwise specified, tolerances are  $\pm 0.20\text{mm}$ .
5. The optical center of the LED array is nominally defined by the mechanical center of the array.
6. Bridgelux maintains a flatness of 0.1 mm across the mounting surface of the array. Refer to Application Notes for product handling, mounting and heat sink recommendations.

# Color Binning Information

**Figure 20: Graph of Bins in xy Color Space, Tc=85C**

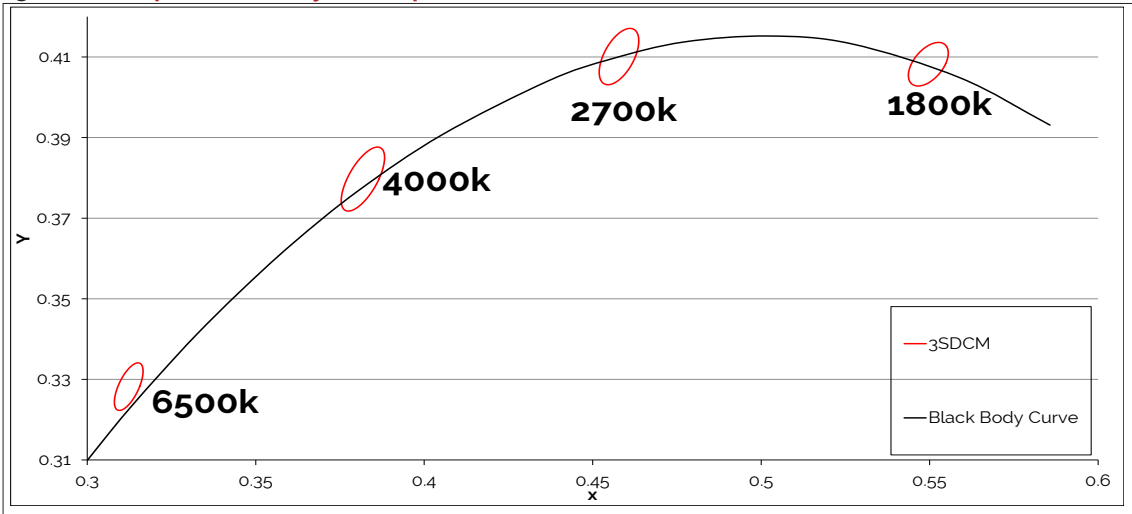


**Table 6: McAdam ellipse CCT color bin definitions for product operating at T<sub>c</sub> = 85°C**

CCT	Center Point	Bin Size	Axis a	Axis b	Rotation Angle
1800K	x=0.5496 y= 0.4082	3 SDCM	0.00698	0.0039	40.00°
2700K	x=0.4578 y= 0.4101	3 SDCM	0.00810	0.00420	53.70°
4000K	x=0.3818 y= 0.3797	3 SDCM	0.0094	0.0040	53.72°
6500K	x=0.3123 y=0.3282	3 SDCM	0.00669	0.00285	58.57°

Notes for Table 6:


1. The x,y center points are the center points of the respective ANSI bins in the CIE 1931 xy Color Space
2. Products are binned at T<sub>c</sub>=85°C
3. Bridgelux maintains a tolerance of +/-0.007 on x and y color coordinates in the CIE 1931 Color Space

**Figure 21: Definition of the McAdam ellipse**



# Packaging and Labeling

**Figure 22: Vesta Series Tunable White gmm Packaging and Labeling**

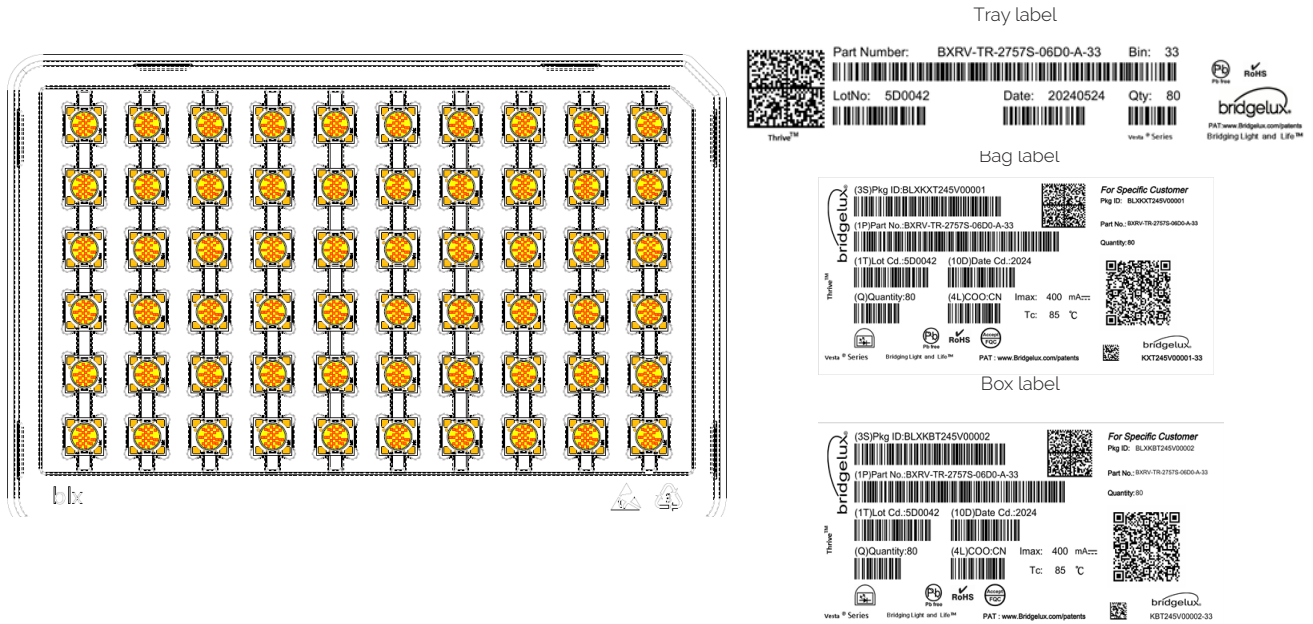

Notes for Figure 22:

1. Each tray holds 60 Vesta Series Tunable White gmm arrays.
2. Four plus one trays are sealed in an anti-static bag. Up to two such bags are placed in an inner box. Up to eight inner boxes are placed in a box and shipped. Depending on quantities ordered, a bigger shipping box, containing eight boxes will be used to ship products.
3. Each bag and box is to be labeled as shown above.
4. Dimensions for each tray are 300 mm (L) x 200 mm (W) x 0.8 mm (T). Dimensions for the anti-static bag are 400 mm (W) x 300 mm (L) x 0.14 mm (T) and that of the inner box are 350 mm (L) x 245 mm (W) x 67 mm (H).

**Figure 23: Product Labeling**

Bridgelux arrays have laser markings on the back side of the substrate to help with product identification. In addition to the product identification markings, Bridgelux arrays also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the array.



# Design Resources

## Application Notes

Vesta Series Tunable White arrays are intended for use in dry, indoor applications. Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the Vesta Series product family of LED array products. For a list of resources under development, visit [www.bridgelux.com](http://www.bridgelux.com).

## Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit [www.bridgelux.com](http://www.bridgelux.com).

## 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux Vesta Series LED arrays are available in both IGS and STEP formats. Please contact your Bridgelux sales representative for assistance.

## LM80

Please contact your Bridgelux sales representative for more information.

# Precautions

## CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED array. Please consult Bridgelux Application Note for additional information.

## CAUTION: RISK OF BURN

Do not touch the Vesta Series LED array during operation. Allow the array to cool for a sufficient period of time before handling. The Vesta Series LED array may reach elevated temperatures such that could burn skin when touched.

## CAUTION

### CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the LED array or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the LED array.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area). Optical devices may be mounted on the top surface of the Vesta Series LED array. Use the mechanical features of the LED array housing, edges and/or mounting holes to locate and secure optical devices as needed.

# Disclaimers

## STANDARD TEST CONDITIONS

Unless otherwise stated, array testing is performed at the nominal drive current.

## MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

# About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

**For more information about the company, please visit**

**[bridgelux.com](http://bridgelux.com)**

**[twitter.com/Bridgelux](https://twitter.com/Bridgelux)**

**[facebook.com/Bridgelux](https://facebook.com/Bridgelux)**

**[youtube.com/user/Bridgelux](https://youtube.com/user/Bridgelux)**

**[linkedin.com/company/bridgelux](https://linkedin.com/company/bridgelux)**

**WeChat ID: BridgeluxInChina**



46410 Fremont Blvd  
Fremont, CA 94538 USA  
Tel (925) 583-8400  
**[www.bridgelux.com](http://www.bridgelux.com)**

© 2026 Bridgelux, Inc. All rights reserved 2022. Product specifications are subject to change without notice. Bridgelux, the Bridgelux stylized logo design and Vesta are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.

**Bridgelux Vesta Series Tunable White HD TW gmm Array Product Data Sheet DS1752 Rev. C (05/2026)**