


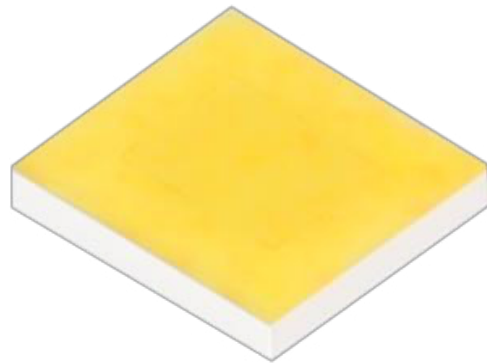


Bridgelux® CSP 1313 Series

Product Data Sheet DSg60

Introduction

CSP 1313



The Bridgelux Chip Scale Package (CSP) 1313 LED offers exceptional performance in an ultra compact size. This CSP LED is hot-color targeted which ensures that the LEDs fall within their specified color bin at the typical application conditions of 85°C. With its superior performance without bonding wires and ability to assemble a densely populated and high luminous flux LED board, the CSP 1313 provides unparalleled design-in flexibility for indoor and outdoor lighting applications. The CSP 1313 is ideal as a drop in replacement for emitters with an industry standard 1.3mm x 1.3mm footprint.

Features

- Competitive efficacy and lumen per dollar
- Industry-standard 1313 footprint, 1-sided emitter
- Excellent color maintenance
- Compatible with SMT
- Superior luminous flux at maximum current for reduced LED count
- Hot-color targeting ensures that color is within the ANSI bin at the typical application conditions of 85°C
- Enables 3- and 5-step MacAdam ellipse custom binning kits
- 120 degrees viewing angle
- Multiple CCT and CRI configurations for a wide range of lighting applications

Benefits

- Lower operating and manufacturing cost
- Ease of design and rapid go-to-market
- Uniform consistent white light
- Reliable and constant white point
- Environmentally friendly, complies with standards
- Design flexibility




Contents

Product Feature Map	2
Product Nomenclature	2
Product Test Conditions	2
Product Selection Guide	3
Performance at Commonly Used Drive Currents	5
Electrical and Thermal Characteristics	11
Absolute Maximum Ratings	12
Product Bin Definitions	15
Performance Curves	18
Typical Radiation Pattern	19
Typical Color Spectrum	20
Mechanical Dimensions	21
Reliability	22
Reflowing Characteristics	23
Packaging	25
Design Resources	26
Precautions	26
Disclaimers	26
About Bridgelux	27

Product Feature Map


Bridgelux CSP LED products offer exceptional performance and color quality all in a highly reliable, cost effective, compact package. Our CSP products come in industry standard package sizes and follow ANSI binning standards.

These LEDs are optimized for cost and performance, helping to ensure highly competitive system lumen per dollar performance while addressing the stringent efficacy and reliability standards required for modern lighting applications.

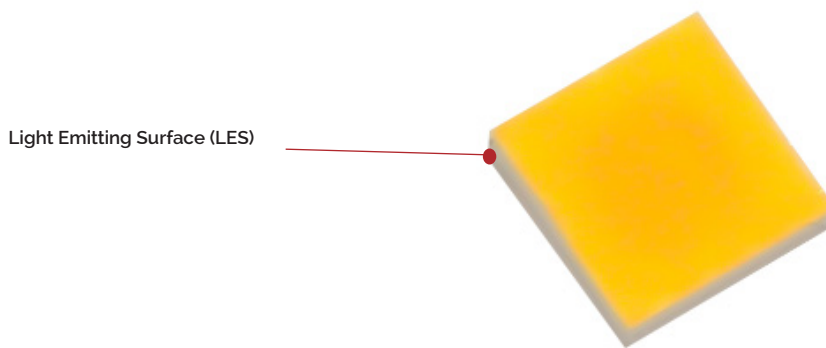

Product Nomenclature

The part number designation for Bridgelux CSP 1313 is explained as follows:

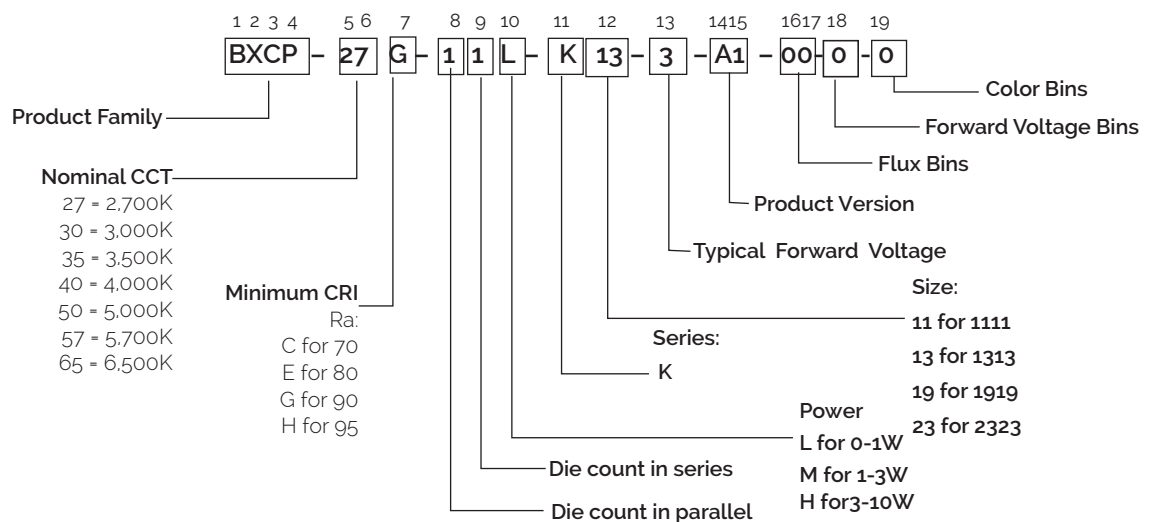

Product Test Conditions

Bridgelux CSP 1313 LEDs are tested and binned with a 10ms pulse of 350mA at T_j (junction temperature) = T_{sp} (solder point temperature) = 85°C. Luminous flux, color and forward voltage are binned at $T_j = T_{sp} = 85^\circ\text{C}$.

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data at 350mA ($T_j = T_{sp} = 25^\circ\text{C}$)

Part Number ^{1,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Cur- rent (mA)	Forward Voltage ^{4,5} (V)			Typical Pulsed Flux ^{4,5} (lm)	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXCP-27C-11L-K13-3-A1-00-0-0	2700	70	350	2.80	3.00	3.20	156	1.1	148
BXCP-30C-11L-K13-3-A1-00-0-0	3000	70	350	2.80	3.00	3.20	159	1.1	151
BXCP-35C-11L-K13-3-A1-00-0-0	3500	70	350	2.80	3.00	3.20	162	1.1	154
BXCP-40C-11L-K13-3-A1-00-0-0	4000	70	350	2.80	3.00	3.20	172	1.1	164
BXCP-50C-11L-K13-3-A1-00-0-0	5000	70	350	2.80	3.00	3.20	172	1.1	164
BXCP-57C-11L-K13-3-A1-00-0-0	5700	70	350	2.80	3.00	3.20	172	1.1	164
BXCP-65C-11L-K13-3-A1-00-0-0	6500	70	350	2.80	3.00	3.20	172	1.1	164
BXCP-27E-11L-K13-3-A1-00-0-0	2700	80	350	2.80	3.00	3.20	142	1.1	136
BXCP-30E-11L-K13-3-A1-00-0-0	3000	80	350	2.80	3.00	3.20	149	1.1	142
BXCP-35E-11L-K13-3-A1-00-0-0	3500	80	350	2.80	3.00	3.20	153	1.1	146
BXCP-40E-11L-K13-3-A1-00-0-0	4000	80	350	2.80	3.00	3.20	161	1.1	153
BXCP-50E-11L-K13-3-A1-00-0-0	5000	80	350	2.80	3.00	3.20	161	1.1	153
BXCP-57E-11L-K13-3-A1-00-0-0	5700	80	350	2.80	3.00	3.20	161	1.1	153
BXCP-65E-11L-K13-3-A1-00-0-0	6500	80	350	2.80	3.00	3.20	161	1.1	153
BXCP-18G-11L-K13-3-A1-00-0-0	1800	90	350	2.80	3.00	3.20	82	1.1	78
BXCP-20G-11L-K13-3-A1-00-0-0	2000	90	350	2.80	3.00	3.20	91	1.1	87
BXCP-22G-11L-K13-3-A1-00-0-0	2200	90	350	2.80	3.00	3.20	100	1.1	95
BXCP-27G-11L-K13-3-A1-00-0-0	2700	90	350	2.80	3.00	3.20	119	1.1	113
BXCP-30G-11L-K13-3-A1-00-0-0	3000	90	350	2.80	3.00	3.20	125	1.1	119
BXCP-35G-11L-K13-3-A1-00-0-0	3500	90	350	2.80	3.00	3.20	129	1.1	123
BXCP-40G-11L-K13-3-A1-00-0-0	4000	90	350	2.80	3.00	3.20	137	1.1	130
BXCP-50G-11L-K13-3-A1-00-0-0	5000	90	350	2.80	3.00	3.20	137	1.1	130
BXCP-57G-11L-K13-3-A1-00-0-0	5700	90	350	2.80	3.00	3.20	137	1.1	130
BXCP-65G-11L-K13-3-A1-00-0-0	6500	90	350	2.80	3.00	3.20	137	1.1	130
BXCP-18H-11L-K13-3-A1-00-0-0	1800	95	350	2.80	3.00	3.20	75	1.1	67
BXCP-20H-11L-K13-3-A1-00-0-0	2000	95	350	2.80	3.00	3.20	81	1.1	72
BXCP-27H-11L-K13-3-A1-00-0-0	2700	95	350	2.80	3.00	3.20	106	1.1	101
BXCP-30H-11L-K13-3-A1-00-0-0	3000	95	350	2.80	3.00	3.20	112	1.1	107
BXCP-35H-11L-K13-3-A1-00-0-0	3500	95	350	2.80	3.00	3.20	116	1.1	110
BXCP-40H-11L-K13-3-A1-00-0-0	4000	95	350	2.80	3.00	3.20	126	1.1	120
BXCP-50H-11L-K13-3-A1-00-0-0	5000	95	350	2.80	3.00	3.20	126	1.1	120
BXCP-57H-11L-K13-3-A1-00-0-0	5700	95	350	2.80	3.00	3.20	126	1.1	120
BXCP-65H-11L-K13-3-A1-00-0-0	6500	95	350	2.80	3.00	3.20	126	1.1	120

Notes for Table 1:

- The last 6 characters (including hyphens '-') refer to nominal flux, nominal forward voltage, and color bins, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.
Example: BXCP-27G-11L-K13-3-A1-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 2700K 5-step ANSI standard chromaticity region with a minimum of 90 CRI.
- Product CCT is not targeted at $T_{sp} = 85^\circ\text{C}$. Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are minimum values and include test tolerance.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_j = T_{sp} = 25^\circ\text{C}$.
- Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous flux measurements, $\pm 0.1\text{V}$ tolerance on forward voltage measurements, and ± 2 tolerance on CRI measurements for the CSP.
- Refer to Table 6 and Table 7 for Bridgelux CSP Luminous Flux Binning and Forward Voltage Binning information.

Product Selection Guide

Table 2: Selection Guide, Pulsed Measurement Data at 350mA ($T_j = T_{sp} = 85^\circ\text{C}$)

Part Number ^{1,5}	Nominal CCT ² (K)	CRI ^{3,4}	Nominal Drive Current (mA)	Forward Voltage ⁴ (V)			Typical Pulsed Flux ⁴ (lm)	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXCP-27C-11L-K13-3-A1-00-0-0	2700	70	350	2.70	2.90	3.20	140	1.0	138
BXCP-30C-11L-K13-3-A1-00-0-0	3000	70	350	2.70	2.90	3.20	143	1.0	141
BXCP-35C-11L-K13-3-A1-00-0-0	3500	70	350	2.70	2.90	3.20	146	1.0	144
BXCP-40C-11L-K13-3-A1-00-0-0	4000	70	350	2.70	2.90	3.20	155	1.0	153
BXCP-50C-11L-K13-3-A1-00-0-0	5000	70	350	2.70	2.90	3.20	155	1.0	153
BXCP-57C-11L-K13-3-A1-00-0-0	5700	70	350	2.70	2.90	3.20	155	1.0	153
BXCP-65C-11L-K13-3-A1-00-0-0	6500	70	350	2.70	2.90	3.20	155	1.0	153
BXCP-27E-11L-K13-3-A1-00-0-0	2700	80	350	2.70	2.90	3.20	128	1.0	127
BXCP-30E-11L-K13-3-A1-00-0-0	3000	80	350	2.70	2.90	3.20	134	1.0	132
BXCP-35E-11L-K13-3-A1-00-0-0	3500	80	350	2.70	2.90	3.20	138	1.0	136
BXCP-40E-11L-K13-3-A1-00-0-0	4000	80	350	2.70	2.90	3.20	144	1.0	142
BXCP-50E-11L-K13-3-A1-00-0-0	5000	80	350	2.70	2.90	3.20	144	1.0	142
BXCP-57E-11L-K13-3-A1-00-0-0	5700	80	350	2.70	2.90	3.20	144	1.0	142
BXCP-65E-11L-K13-3-A1-00-0-0	6500	80	350	2.70	2.90	3.20	144	1.0	142
BXCP-18G-11L-K13-3-A1-00-0-0	1800	90	350	2.70	2.90	3.20	74	1.0	73
BXCP-20G-11L-K13-3-A1-00-0-0	2000	90	350	2.70	2.90	3.20	81	1.0	80
BXCP-22G-11L-K13-3-A1-00-0-0	2200	90	350	2.70	2.90	3.20	90	1.0	89
BXCP-27G-11L-K13-3-A1-00-0-0	2700	90	350	2.70	2.90	3.20	107	1.0	105
BXCP-30G-11L-K13-3-A1-00-0-0	3000	90	350	2.70	2.90	3.20	112	1.0	111
BXCP-35G-11L-K13-3-A1-00-0-0	3500	90	350	2.70	2.90	3.20	116	1.0	114
BXCP-40G-11L-K13-3-A1-00-0-0	4000	90	350	2.70	2.90	3.20	123	1.0	121
BXCP-50G-11L-K13-3-A1-00-0-0	5000	90	350	2.70	2.90	3.20	123	1.0	121
BXCP-57G-11L-K13-3-A1-00-0-0	5700	90	350	2.70	2.90	3.20	123	1.0	121
BXCP-65G-11L-K13-3-A1-00-0-0	6500	90	350	2.70	2.90	3.20	123	1.0	121
BXCP-18H-11L-K13-3-A1-00-0-0	1800	95	350	2.70	2.90	3.20	67	1.0	62
BXCP-20H-11L-K13-3-A1-00-0-0	2000	95	350	2.70	2.90	3.20	73	1.0	67
BXCP-27H-11L-K13-3-A1-00-0-0	2700	95	350	2.70	2.90	3.20	95	1.0	94
BXCP-30H-11L-K13-3-A1-00-0-0	3000	95	350	2.70	2.90	3.20	101	1.0	100
BXCP-35H-11L-K13-3-A1-00-0-0	3500	95	350	2.70	2.90	3.20	104	1.0	102
BXCP-40H-11L-K13-3-A1-00-0-0	4000	95	350	2.70	2.90	3.20	113	1.0	111
BXCP-50H-11L-K13-3-A1-00-0-0	5000	95	350	2.70	2.90	3.20	113	1.0	111
BXCP-57H-11L-K13-3-A1-00-0-0	5700	95	350	2.70	2.90	3.20	113	1.0	111
BXCP-65H-11L-K13-3-A1-00-0-0	6500	95	350	2.70	2.90	3.20	113	1.0	111

Notes for Table 2:

- The last 6 characters (including hyphens '-') refer to nominal flux, nominal forward voltage, and color bins, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.
Example: BXCP-27G-11L-K13-3-A1-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 2700K 5-step ANSI standard chromaticity region with a minimum of 90 CRI.
- Product CCT is hot targeted at $T_{sp} = 85^\circ\text{C}$. Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are minimum values and include test tolerance.
- Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous flux measurements, $\pm 0.1\text{V}$ tolerance on forward voltage measurements, and ± 2 tolerance on CRI measurements for the CSP.
- Refer to Table 6 and Table 7 for Bridgelux CSP Luminous Flux Binning and Forward Voltage Binning information.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_j = T_{sp} = 85^\circ\text{C}$.

Performance at Commonly Used Drive Currents

CSP 1313 LEDs specifications at nominal drive current are shown in Table 1 and Table 2. CSP 1313 may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figure 2 and the relative luminous flux vs. current characteristics shown in Figure 3. The performance at commonly used drive currents is summarized in Table 3.

Table 3: Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-27C-11L-K13-3-A1-00-0-0	70	50	2.7	0.1	27	24	198
		150	2.8	0.4	75	68	179
		250	2.9	0.7	118	106	162
		350	3.0	1.1	156	140	148
		550	3.2	1.8	221	199	126
		700	3.3	2.3	264	238	114
BXCP-30C-11L-K13-3-A1-00-0-0	70	50	2.7	0.1	27	25	202
		150	2.8	0.4	77	69	183
		250	2.9	0.7	120	108	166
		350	3.0	1.1	159	143	151
		550	3.2	1.8	226	203	128
		700	3.3	2.3	270	243	117
BXCP-35C-11L-K13-3-A1-00-0-0	70	50	2.7	0.1	28	25	206
		150	2.8	0.4	78	71	187
		250	2.9	0.7	123	110	169
		350	3.0	1.1	162	146	154
		550	3.2	1.8	231	208	131
		700	3.3	2.3	276	248	119
BXCP-40C-11L-K13-3-A1-00-0-0	70	50	2.7	0.1	30	27	219
		150	2.8	0.4	83	75	198
		250	2.9	0.7	130	117	180
		350	3.0	1.1	172	155	164
		550	3.2	1.8	245	220	139
		700	3.3	2.3	293	263	127
BXCP-50C-11L-K13-3-A1-00-0-0	70	50	2.7	0.1	30	27	219
		150	2.8	0.4	83	75	198
		250	2.9	0.7	130	117	180
		350	3.0	1.1	172	155	164
		550	3.2	1.8	245	220	139
		700	3.3	2.3	293	263	127
BXCP-57C-11L-K13-3-A1-00-0-0	70	50	2.7	0.1	30	27	219
		150	2.8	0.4	83	75	198
		250	2.9	0.7	130	117	180
		350	3.0	1.1	172	155	164
		550	3.2	1.8	245	220	139
		700	3.3	2.3	293	263	127

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _{sp} = 25° C (V)	Typical Power T _{sp} = 25° C (W)	Typical Pulsed Flux ² T _{sp} = 25° C (lm)	Typical Pulsed Flux ³ T _{sp} = 85° C (lm)	Typical Efficacy T _{sp} = 25° C (lm/W)
BXCP-65C-11L-K13-3-A1-00-0-0	70	50	2.7	0.1	30	27	219
		150	2.8	0.4	83	75	198
		250	2.9	0.7	130	117	180
		350	3.0	1.1	172	155	164
		550	3.2	1.8	245	220	139
		700	3.3	2.3	293	263	127
BXCP-27E-11L-K13-3-A1-00-0-0	80	50	2.7	0.1	24	22	181
		150	2.8	0.4	69	62	164
		250	2.9	0.7	108	97	149
		350	3.0	1.1	142	128	136
		550	3.2	1.8	203	183	115
		700	3.3	2.3	242	218	105
BXCP-30E-11L-K13-3-A1-00-0-0	80	50	2.7	0.1	26	23	189
		150	2.8	0.4	72	65	171
		250	2.9	0.7	112	101	155
		350	3.0	1.1	149	134	142
		550	3.2	1.8	211	190	120
		700	3.3	2.3	253	227	109
BXCP-35E-11L-K13-3-A1-00-0-0	80	50	2.7	0.1	26	24	195
		150	2.8	0.4	74	67	176
		250	2.9	0.7	116	104	160
		350	3.0	1.1	153	138	146
		550	3.2	1.8	218	196	124
		700	3.3	2.3	260	234	113
BXCP-40E-11L-K13-3-A1-00-0-0	80	50	2.7	0.1	28	25	204
		150	2.8	0.4	78	70	185
		250	2.9	0.7	121	109	167
		350	3.0	1.1	161	144	153
		550	3.2	1.8	228	205	130
		700	3.3	2.3	273	245	118
BXCP-50E-11L-K13-3-A1-00-0-0	80	50	2.7	0.1	28	25	204
		150	2.8	0.4	78	70	185
		250	2.9	0.7	121	109	167
		350	3.0	1.1	161	144	153
		550	3.2	1.8	228	205	130
		700	3.3	2.3	273	245	118

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7.5% tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-57E-11L-K13-3-A1-00-0-0	80	50	2.7	0.1	28	25	204
		150	2.8	0.4	78	70	185
		250	2.9	0.7	121	109	167
		350	3.0	1.1	161	144	153
		550	3.2	1.8	228	205	130
		700	3.3	2.3	273	245	118
BXCP-65E-11L-K13-3-A1-00-0-0	80	50	2.7	0.1	28	25	204
		150	2.8	0.4	78	70	185
		250	2.9	0.7	121	109	167
		350	3.0	1.1	161	144	153
		550	3.2	1.8	228	205	130
		700	3.3	2.3	273	245	118
BXCP-18G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	14	13	105
		150	2.8	0.4	40	36	95
		250	2.9	0.7	62	56	86
		350	3.0	1.1	82	74	78
		550	3.2	1.8	117	105	67
		700	3.3	2.3	140	126	61
BXCP-20G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	16	14	115
		150	2.8	0.4	44	40	105
		250	2.9	0.7	69	62	95
		350	3.0	1.1	91	81	87
		550	3.2	1.8	129	116	73
		700	3.3	2.3	154	139	67
BXCP-22G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	17	15	127
		150	2.8	0.4	48	43	115
		250	2.9	0.7	75	68	104
		350	3.0	1.1	100	90	95
		550	3.2	1.8	141	127	80
		700	3.3	2.3	169	152	73
BXCP-27G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	20	18	151
		150	2.8	0.4	58	52	137
		250	2.9	0.7	90	81	124
		350	3.0	1.1	119	107	113
		550	3.2	1.8	169	152	96
		700	3.3	2.3	202	182	87

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-30G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	21	19	159
		150	2.8	0.4	61	55	144
		250	2.9	0.7	95	85	131
		350	3.0	1.1	125	112	119
		550	3.2	1.8	178	160	101
		700	3.3	2.3	213	191	92
BXCP-35G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	22	20	164
		150	2.8	0.4	62	56	149
		250	2.9	0.7	98	88	135
		350	3.0	1.1	129	116	123
		550	3.2	1.8	183	165	104
		700	3.3	2.3	219	197	95
BXCP-40G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	23	21	174
		150	2.8	0.4	66	60	157
		250	2.9	0.7	103	93	143
		350	3.0	1.1	137	123	130
		550	3.2	1.8	194	175	110
		700	3.3	2.3	232	209	101
BXCP-50G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	23	21	174
		150	2.8	0.4	66	60	157
		250	2.9	0.7	103	93	143
		350	3.0	1.1	137	123	130
		550	3.2	1.8	194	175	110
		700	3.3	2.3	232	209	101
BXCP-57G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	23	21	174
		150	2.8	0.4	66	60	157
		250	2.9	0.7	103	93	143
		350	3.0	1.1	137	123	130
		550	3.2	1.8	194	175	110
		700	3.3	2.3	232	209	101
BXCP-65G-11L-K13-3-A1-00-0-0	90	50	2.7	0.1	23	21	174
		150	2.8	0.4	66	60	157
		250	2.9	0.7	103	93	143
		350	3.0	1.1	137	123	130
		550	3.2	1.8	194	175	110
		700	3.3	2.3	232	209	101

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-18H-11L-K13-3-A1-00-0-0	95	50	2.7	0.1	13	12	95
		150	2.8	0.4	36	33	86
		250	2.9	0.7	57	51	78
		350	3.0	1.1	75	67	71
		550	3.2	1.8	106	96	60
		700	3.3	2.3	127	115	55
BXCP-20H-11L-K13-3-A1-00-0-0	95	50	2.7	0.1	14	12	103
		150	2.8	0.4	39	35	93
		250	2.9	0.7	61	55	84
		350	3.0	1.1	81	73	77
		550	3.2	1.8	115	103	65
		700	3.3	2.3	137	124	59
BXCP-27H-11L-K13-3-A1-00-0-0	95	50	2.7	0.1	18	16	134
		150	2.8	0.4	51	46	122
		250	2.9	0.7	80	72	110
		350	3.0	1.1	106	95	101
		550	3.2	1.8	150	135	85
		700	3.3	2.3	179	161	78
BXCP-30H-11L-K13-3-A1-00-0-0	95	50	2.7	0.1	19	17	143
		150	2.8	0.4	54	49	129
		250	2.9	0.7	85	76	117
		350	3.0	1.1	112	101	107
		550	3.2	1.8	160	144	91
		700	3.3	2.3	191	172	83
BXCP-35H-11L-K13-3-A1-00-0-0	95	50	2.7	0.1	20	18	147
		150	2.8	0.4	56	50	133
		250	2.9	0.7	87	79	121
		350	3	1.1	116	104	110
		550	3.2	1.8	164	148	93
		700	3.3	2.3	196	177	85
BXCP-40H-11L-K13-3-A1-00-0-0	95	50	2.7	0.1	22	19	160
		150	2.8	0.4	61	55	145
		250	2.9	0.7	95	85	131
		350	3.0	1.1	126	113	120
		550	3.2	1.8	178	161	101
		700	3.3	2.3	213	192	92

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-50H-11L-K13-3-A1-00-0-0	95	50	2.7	0.1	22	19	160
		150	2.8	0.4	61	55	145
		250	2.9	0.7	95	85	131
		350	3.0	1.1	126	113	120
		550	3.2	1.8	178	161	101
		700	3.3	2.3	213	192	92
BXCP-57H-11L-K13-3-A1-00-0-0	95	50	2.7	0.1	22	19	160
		150	2.8	0.4	61	55	145
		250	2.9	0.7	95	85	131
		350	3.0	1.1	126	113	120
		550	3.2	1.8	178	161	101
		700	3.3	2.3	213	192	92
BXCP-65H-11L-K13-3-A1-00-0-0	95	50	2.7	0.1	22	19	160
		150	2.8	0.4	61	55	145
		250	2.9	0.7	95	85	131
		350	3.0	1.1	126	113	120
		550	3.2	1.8	178	161	101
		700	3.3	2.3	213	192	92

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Electrical and Thermal Characteristics

Table 4: Electrical and Thermal Characteristics

Part Number ¹	Drive Current (mA)	Forward Voltage ^{2,3} (V)			Typical Temperature Coefficient of Forward Voltage ⁴ $\Delta V_f / \Delta T$ (mV/°C)	Typical Thermal Resistance Junction to Solder Point ^{5,6} R_{j-sp} (°C/W)
		Minimum	Typical	Maximum		
BXCP-xxx-11L-K13-3-A1-00-0-0	350	2.70	2.90	3.20	-16	4.5

Notes for Table 4:

1. The last 6 characters (including hyphens '-') refer to nominal flux, nominal forward voltage, and color bins, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.

Example: BXCP-27G-11L-K13-3-A1-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 2700K 5-step ANSI standard chromaticity region with a minimum of 90 CRI.

2. Products tested under pulsed condition (10ms pulse width) where $T_{sp} = 85^{\circ}\text{C}$.

3. Bridgelux maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

4. Products measured between 25°C and 105°C under pulsed condition (10ms pulse width).

5. Thermal Resistance values based on 2700K 90 CRI product.

6. Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power.

Absolute Maximum Ratings

Table 5: Maximum Ratings

Parameter	Maximum Rating
LED Junction Temperature (T_j)	135°C
Storage Temperature	-40°C to +125°C
Operating Solder Point Temperature (T_{sp})	-40°C to +105°C
Soldering Temperature	260°C or lower for a maximum of 10 seconds
Maximum Drive Current ¹	700mA
Maximum Peak Pulsed Forward Current ²	1000mA
Maximum Reverse Voltage ³	-5V
Moisture Sensitivity Rating	MSL 3
Electrostatic Discharge	2kV HBM. JEDEC-JS-001-HBM and JEDEC-JS-001-2012

Notes for Table 5:

1. The maximum drive current is limited depending on the solder point temperature. Refer to Figure 7.
2. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 10 ms when operating CSP LED at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where CSP LED can be driven without catastrophic failures.
3. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.

Product Bin Definitions

Table 6 lists the standard photometric luminous flux bins for Bridgelux CSP 1313 LEDs. Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

Table 6: Luminous Flux Bin Definitions at 350mA, $T_{sp}=85^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
D1	60	70	lm	$I_F=350\text{mA}$
E1	70	80		
F1	80	90		
G1	90	100		
H1	100	110		
I1	110	120		
J1	120	130		
K1	130	140		
M1	140	150		
N1	150	160		
P1	160	170		
Q1	170	180		
R1	180	190		

Note for Table 6:

1. Bridgelux maintains a tolerance of $\pm 7.5\%$ on luminous flux measurements.

Table 7: Forward Voltage Bin Definitions at 350mA, $T_{sp}=85^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
C	2.6	2.8	V	$I_F=350\text{mA}$
D	2.8	3.0		
E	3.0	3.2		

Note for Table 7:

1. Bridgelux maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

Product Bin Definitions

Table 8: 3- and 5-step MacAdam Ellipse Color Bin Definitions ($T_{sp}=85^{\circ}\text{C}$)



Table 8: 3- and 5-step MacAdam Ellipse Color Bin Definitions ($T_{sp}=85^{\circ}\text{C}$)							
CCT	Color Space	Center Point		Major Axis	Minor Axis	θ (angle)	Color Bin
		x	y				
1800K	3	0.5496	0.4082	0.00698	0.00393	40.000	3
	5			0.01164	0.00655		5(E/F/G/H)
2000K	3	0.5251	0.4120	0.00723	0.00399	51.000	3
	5			0.01205	0.00665		5(E/F/G/H)
2200K	3	0.5056	0.4152	0.00723	0.00399	51.918	3
	5			0.01205	0.00665		5(E/F/G/H)
2700K	3	0.4578	0.4101	0.00810	0.00420	53.700	3
	5			0.01350	0.00700		5(E/F/G/H)
3000K	3	0.4338	0.4030	0.00834	0.00408	53.220	3
	5			0.01390	0.00680		5(E/F/G/H)
3500K	3	0.4073	0.3917	0.00927	0.00414	54.000	3
	5			0.01545	0.00690		5(E/F/G/H)
4000K	3	0.3818	0.3797	0.00939	0.00402	53.720	3
	5			0.01565	0.00670		5(E/F/G/H)
5000K	3	0.3447	0.3553	0.00822	0.00354	59.620	3
	5			0.01370	0.00590		5(E/F/G/H)
5700K	3	0.3287	0.3417	0.00746	0.00320	59.090	3
	5			0.01243	0.00533		5(E/F/G/H)
6500K	3	0.3123	0.3282	0.00669	0.00285	58.570	3
	5			0.01115	0.00475		5(E/F/G/H)

Note for Table 8:

1. Bridgelux maintains a tolerance of ± 0.007 on x and y color coordinates in the CIE 1931 color space.
2. MacAdam Ellipse Color bin code 3(3 SDCM)/ EFGH(5 SDCM).

Product Bin Definitions

Figure 1: C.I.E. 1931 Chromaticity Diagram (Color Bin Structure, $T_{sp}=85^{\circ}\text{C}$)

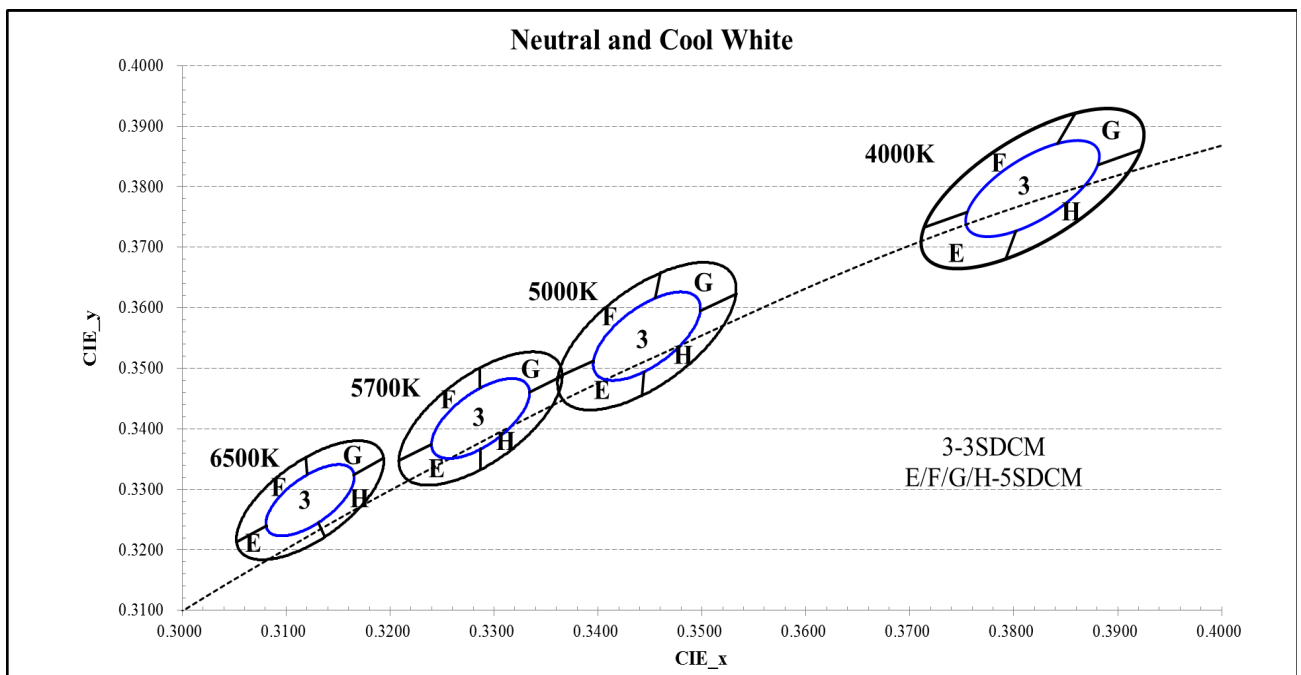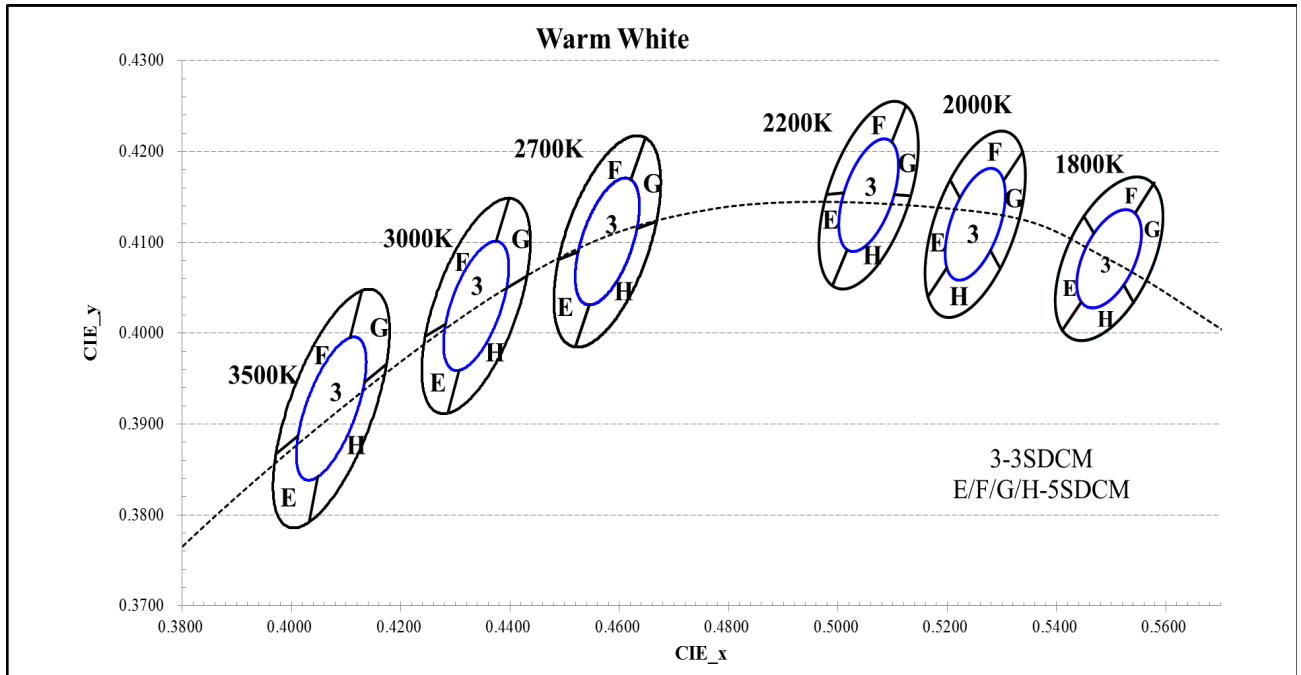

Performance Curves

Figure 2: Drive Current vs. Voltage ($T_{sp}=85^{\circ}\text{C}$)


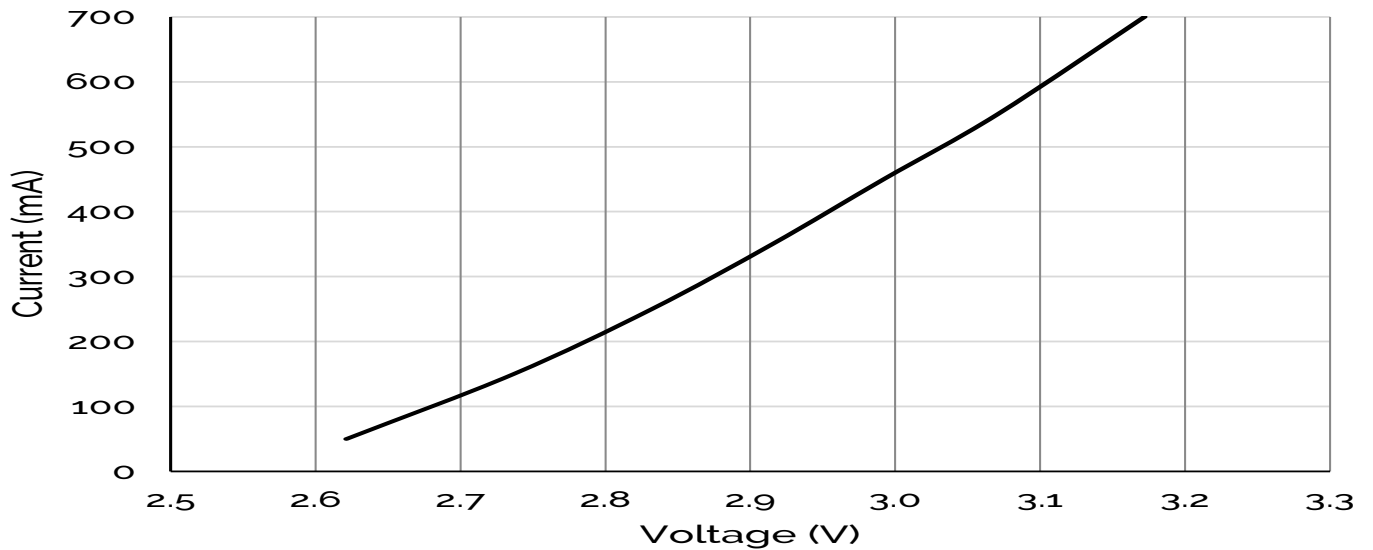


Figure 3: Typical Relative Luminous Flux vs. Drive Current ($T_{sp}=85^{\circ}\text{C}$)

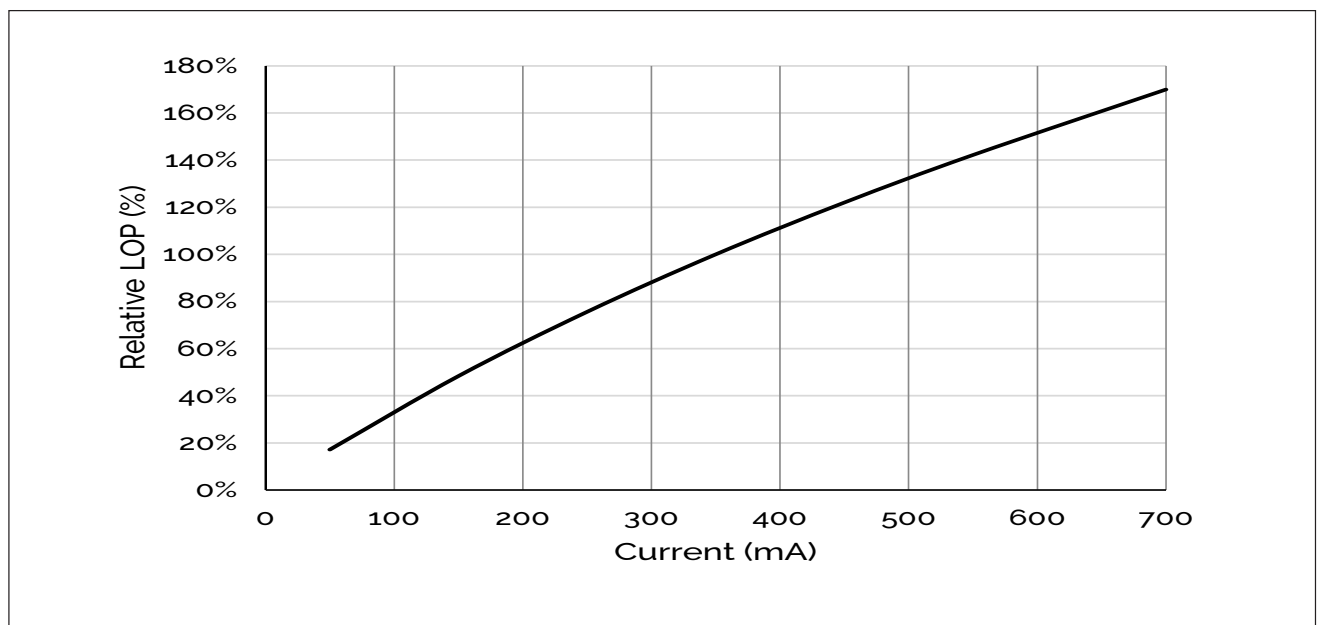

Note for Figure 3:

1. Bridgelux does not recommend driving this CSP LED at low current ($< 10\text{mA}$). Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.

Performance Curves

Figure 4: Typical Relative Flux vs. Solder Point Temperature_350mA


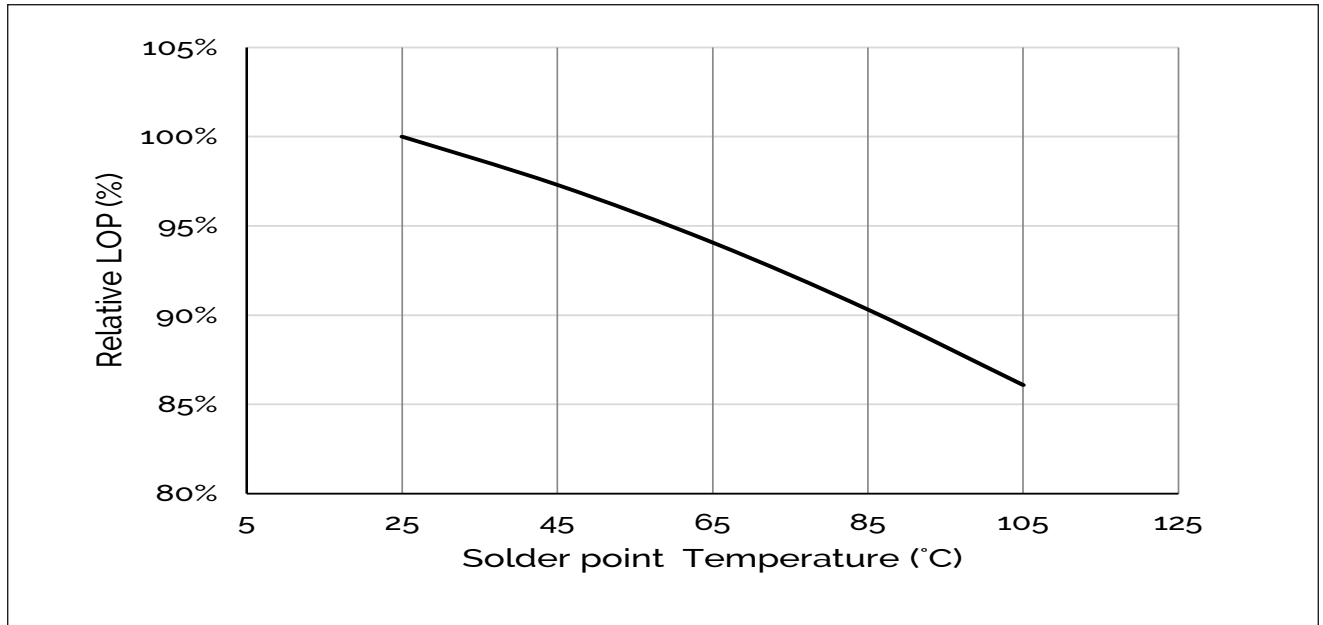


Figure 5: Typical ccy Shift vs. Solder Point Temperature_350mA

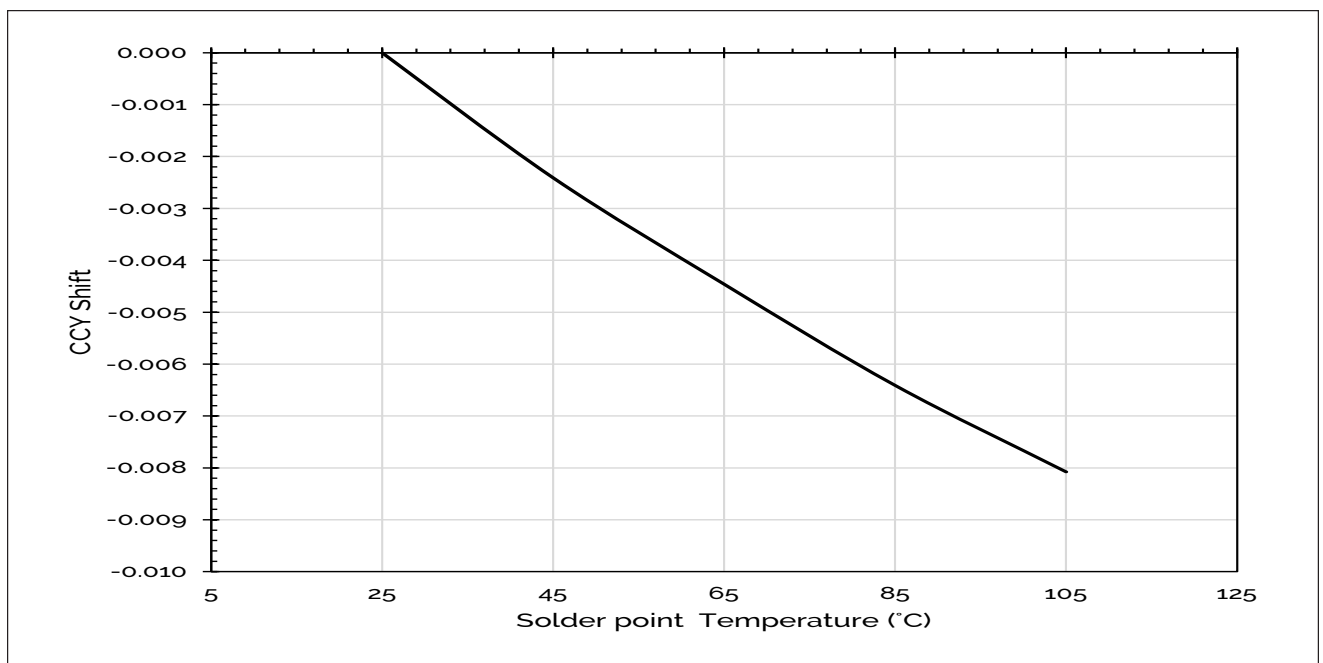


Notes for Figures 4 & 5:

- 1.Characteristics shown for warm white based on 2700K and 90 CRI.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Performance Curves


Figure 6: Typical ccx Shift vs. Solder Point Temperature_350mA

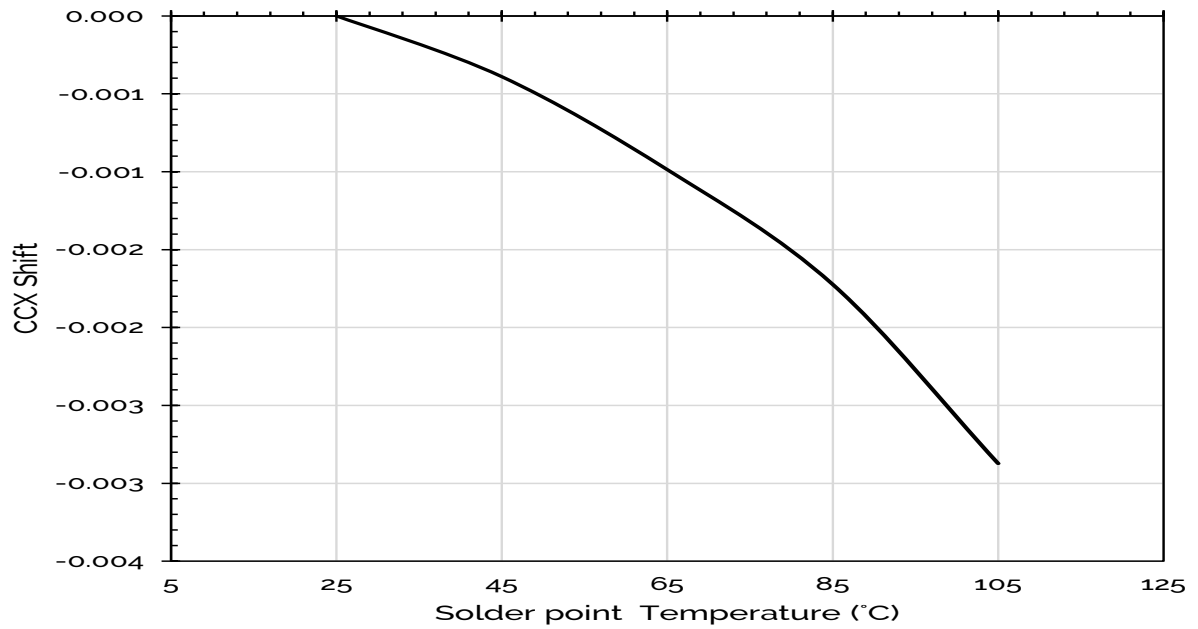

Notes for Figure 6:


1. Characteristics shown for warm white based on 2700K and 90 CRI.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Figure 7: Drive Current vs Solder Point Temperature

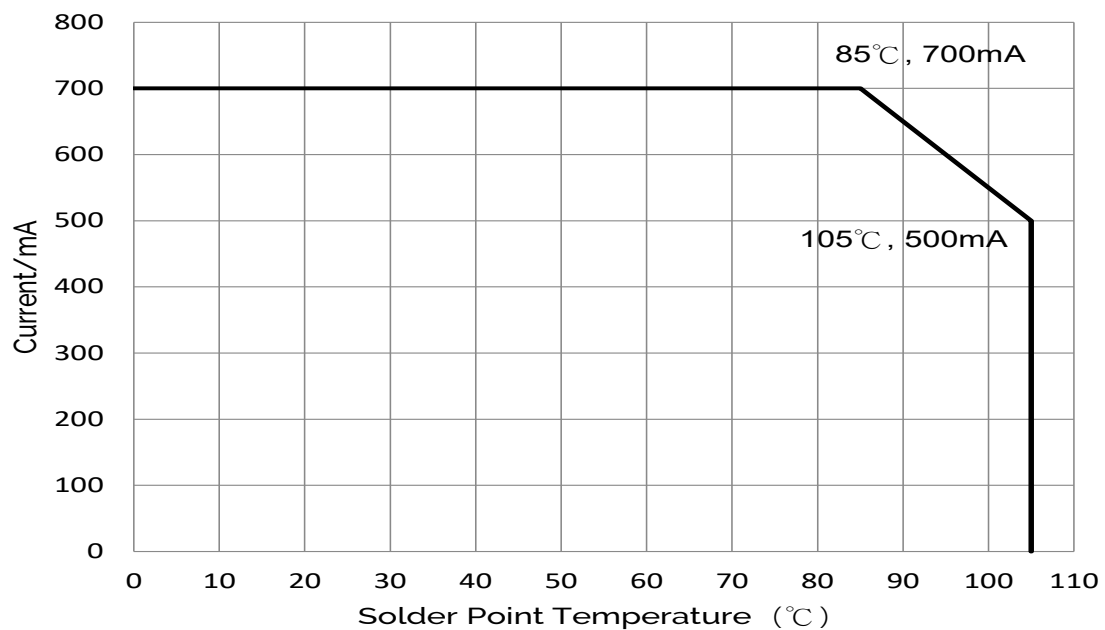

Typical Radiation Pattern


Figure 8: Typical Spatial Radiation Pattern at 350mA, $T_{sp} = 25^{\circ}\text{C}$

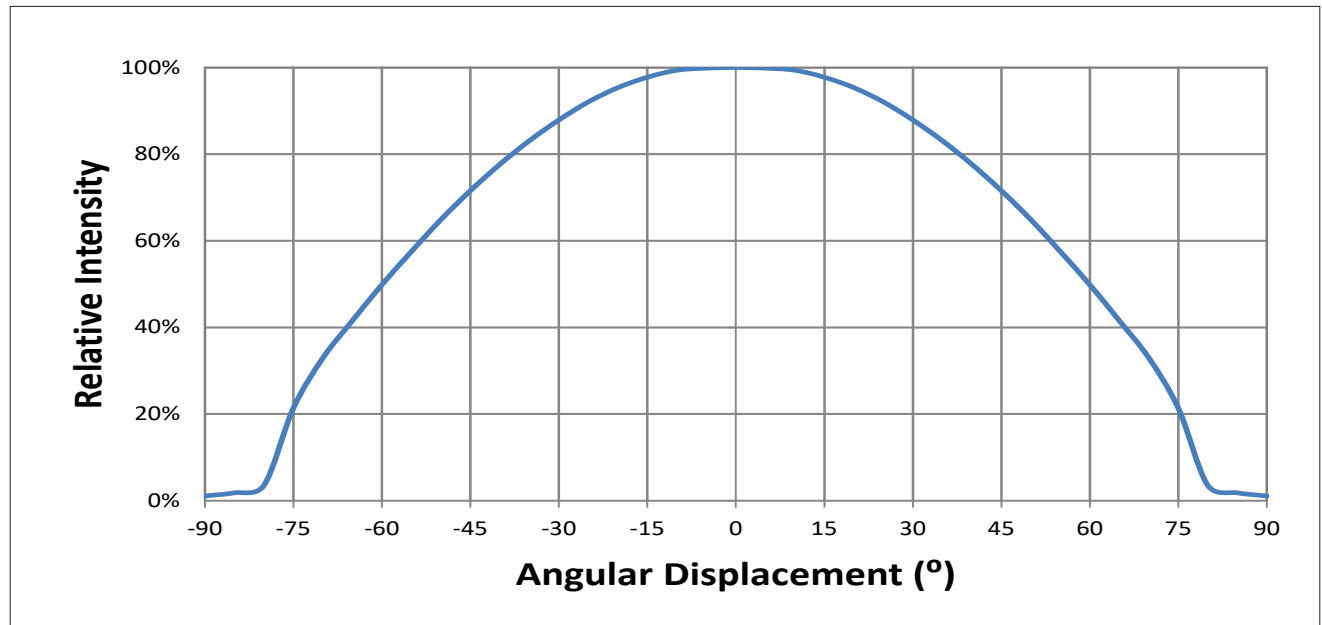

Notes for Figure 8:


1. Typical viewing angle is 120° .
2. The viewing angle is defined as the off axis angle from the centerline where I_v is $\frac{1}{2}$ of the peak value.

Figure 9: Typical Polar Radiation Pattern at 350mA, $T_{sp} = 25^{\circ}\text{C}$

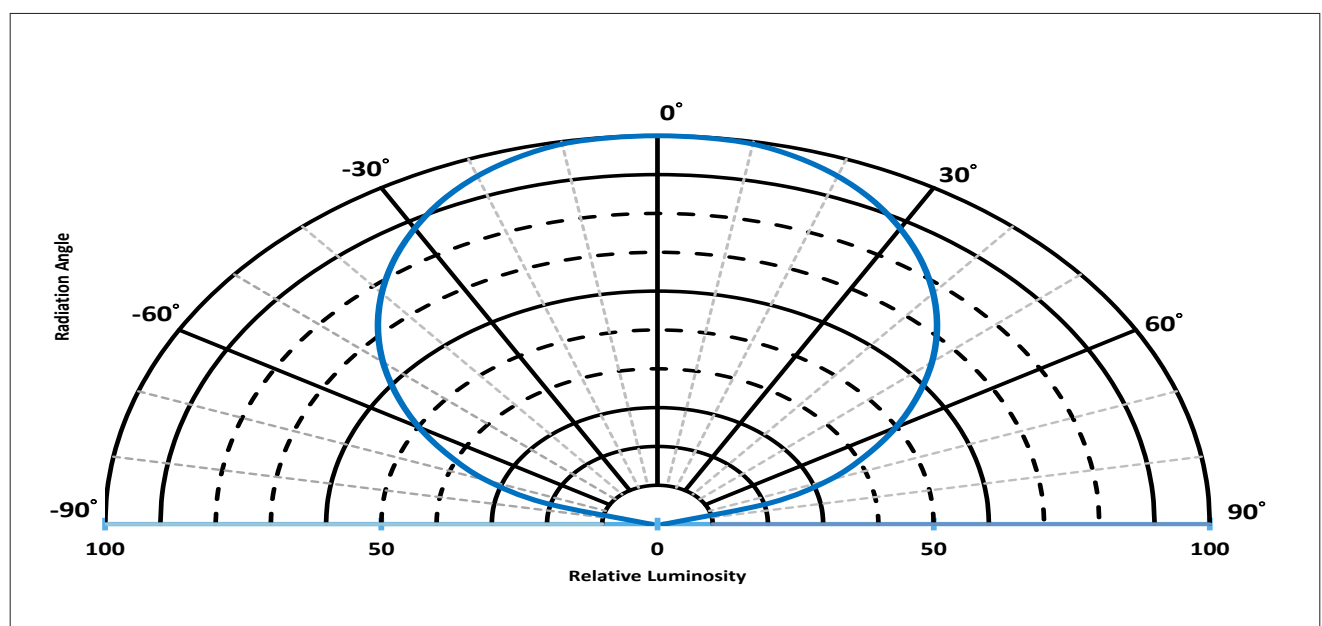

Typical Color Spectrum

Figure 10: Typical Color Spectrum at 350mA, Tsp=85°C

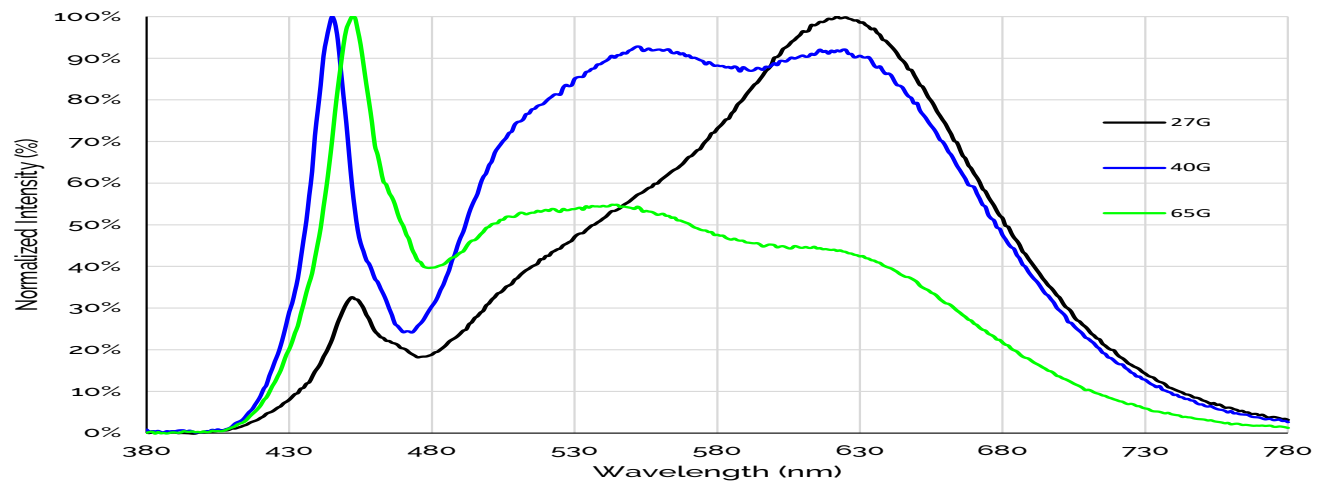


Notes for Figure 10:

1. Color spectra shown for warm white is 2700K and 90 CRI.
2. Color spectra shown for neutral white is 4000K and 90 CRI.
3. Color spectra shown for cool white is 6500K and 90 CRI.

Mechanical Dimensions


Figure 11: Drawing for CSP 1313

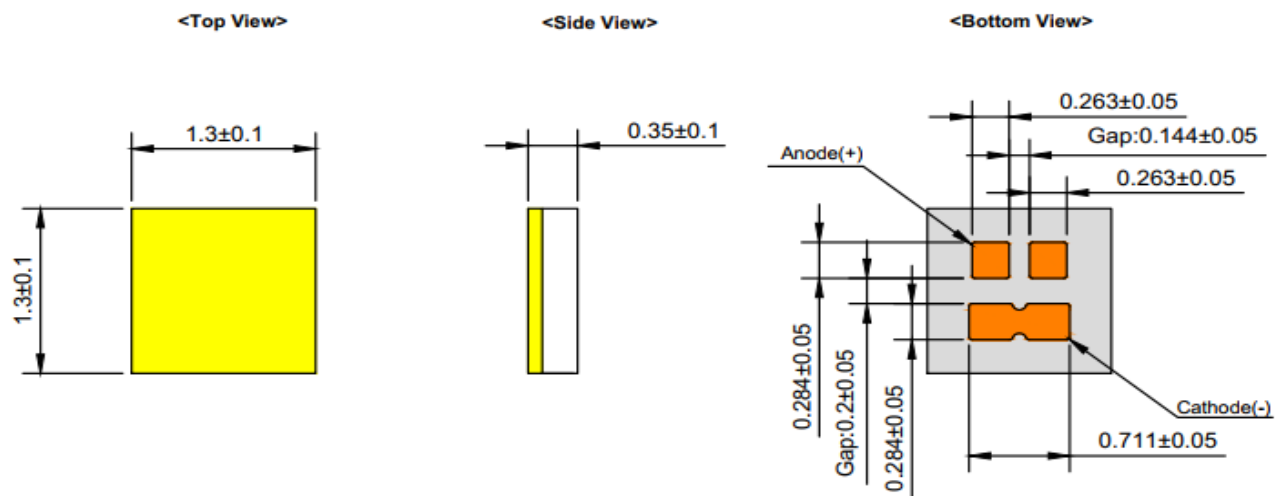

Notes for Figure 11:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are ± 0.10 mm.
4. The optical center of the LED emitter is nominally defined by the mechanical center of the emitter. The light emitting surface (LES) is centered on the mechanical center of the LED emitter to a tolerance of ± 0.2 mm

Recommended PCB Soldering Pad Pattern

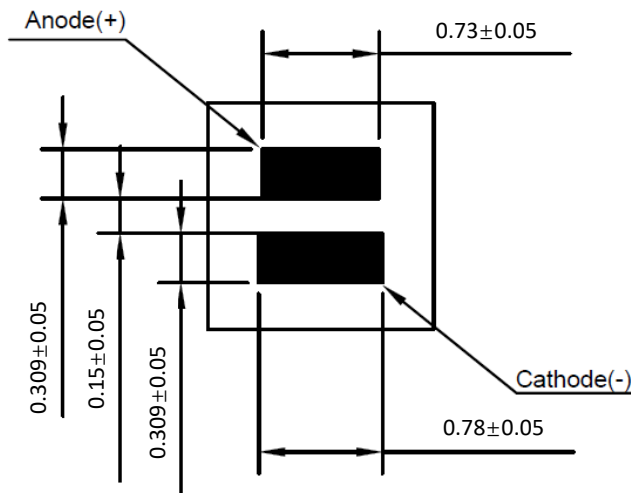

Reliability

Table 9: Reliability Test Items and Conditions

No .	Items	Reference Standard	Test Conditions	Drive Current	Test Duration	Units Failed/Tested
1	Moisture Sensitivity Level	J-STD-020E	$T_{sld} = 260^{\circ}\text{C}$, 10sec, Precondition: 85°C , 60%RH, 168hr		3 reflows	0/22
2	Low Temperature Storage	JESD22-A119	$T_a = -40^{\circ}\text{C}$		1000 hours	0/22
3	High Temperature Storage	JESD22-A103D	$T_a = 125^{\circ}\text{C}$		1000 hours	0/22
4	Low Temperature Operating Life	JESD22-A108D	$T_a = -40^{\circ}\text{C}$	700mA	1000 hours	0/22
5	Temperature Humidity Operating Life	JESD22-A101C	$T_{sp} = 85^{\circ}\text{C}$, RH=85%	700mA	1000 hours	0/22
6	High Temperature Operating Life	JESD22-A108D	$T_{sp} = 85^{\circ}\text{C}$	700mA	1000 hours	0/22
7	Power Switching	IEC62717	$T_{sp} = 85^{\circ}\text{C}$, ON 30s OFF 30s	700mA	30000 Cycle	0/22
8	Thermal Shock	JESD22-A106B	$T_a = -40^{\circ}\text{C} \sim 125^{\circ}\text{C}$; Dwell : 15min; Transfer: 10sec		200 Cycle	0/22
9	Electrostatic Discharge	JS-001-2012	HBM, 2kV, 15k Ω , 100pF, Alternately positive or negative			0/22
10	Vibration Test	JESD22-B103	10m/s ² , 100-20000~100Hz 4 cycles,4min,eachX,Y,Z		4 Cycles	0/22

Passing Criteria


Item	Symbol	Test Condition	Passing Criteria
Forward Voltage	V _f	700mA	$\Delta V_f < 10\%$
Luminous Flux	I _v	700mA	$\Delta I_v < 30\%$
Chromaticity Coordinates	(x, y)	700mA	$\Delta u'v' < 0.007$

Notes for Table 9:

1. Test board: Aluminum board thickness ~1.0mm, Copper layer thickness=70um.
2. Measurements are performed after allowing the LEDs to return to room temperature
3. T_{sld} : reflow soldering temperature; T_a : ambient temperature

Reflowing Characteristics


Figure 12 : Reflow Profile

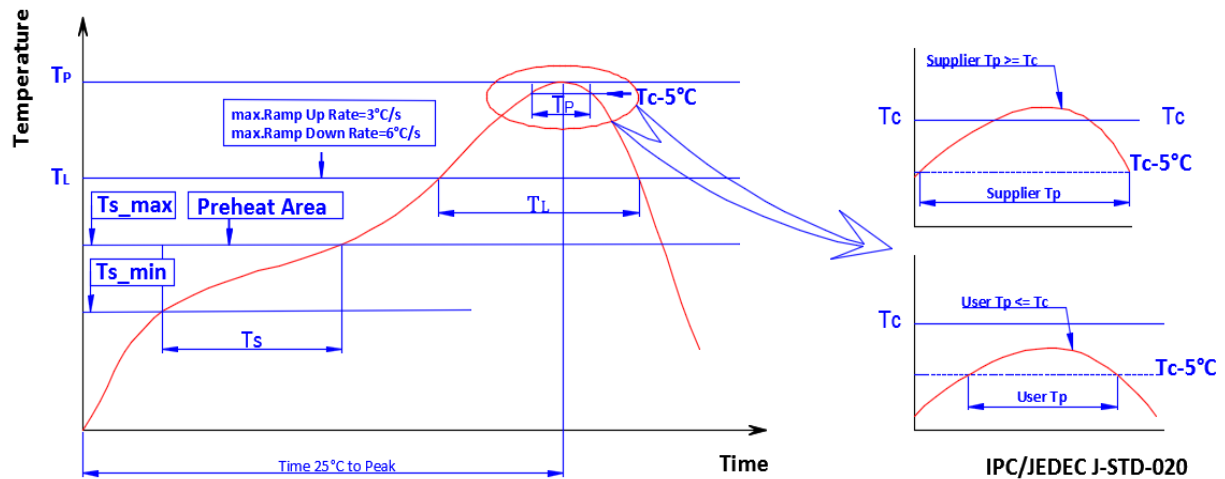

Profile Parameters	Lead-Free Solder SAC305
Average Ramp-Up Rate (T_{s_max} to T_p)	3°C/second max.
Preheat: Temperature Min (T_{s_min})	150°C
Preheat: Temperature Max (T_{s_max})	190°C
Preheat: Time (t_{s_min} to t_{s_max})	90-120 seconds
Liquidous Temperature (T_L)	217°C
Time Maintained Above Liquidous Temperature (T_L): Time (t_l)	60-90 seconds
Peak/Classification Temperature (T_p)	250-255°C
Time Within 10°C of Actual Peak Temperature (T_p)	20-40 seconds
Ramp-Down Rate	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.

Packaging


Figure 13: Reel Drawings

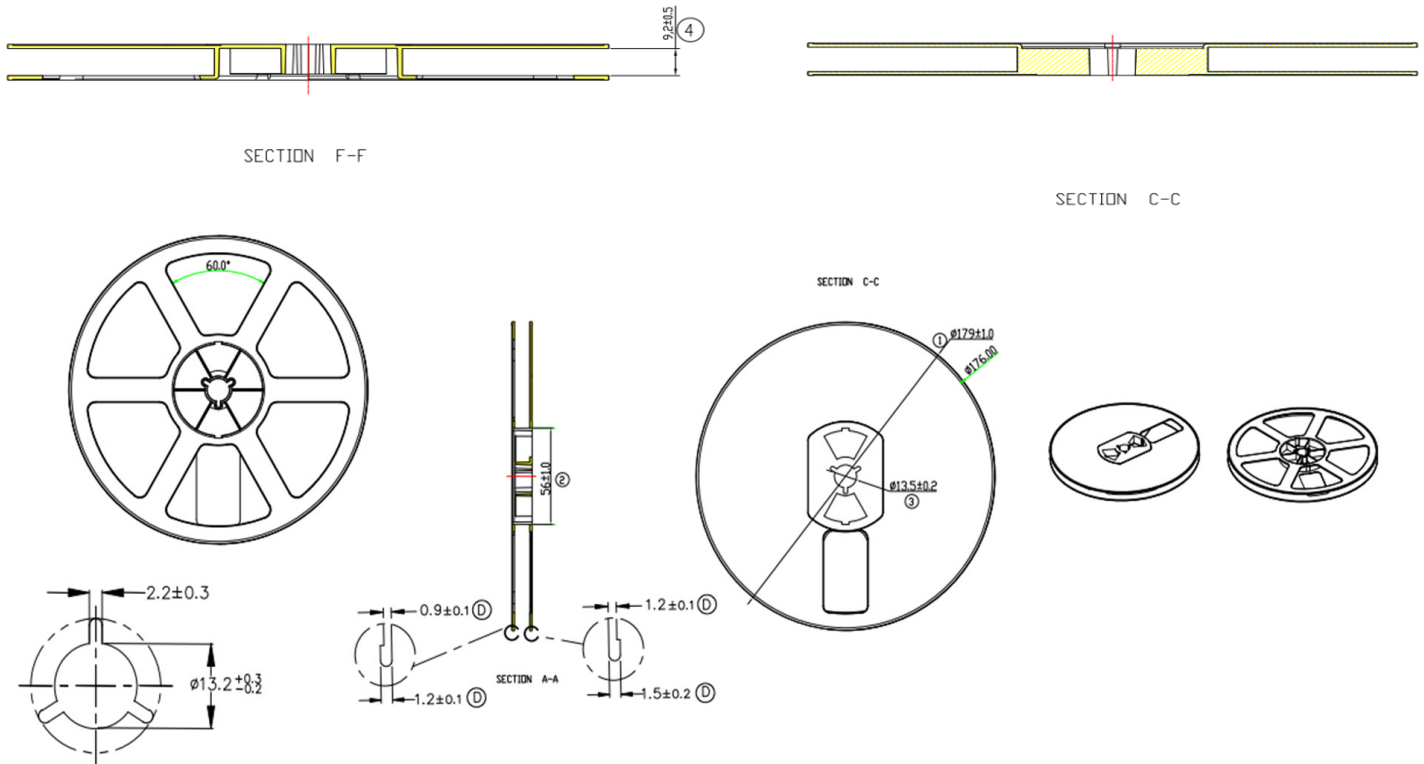

Note for Figure 13:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Figure 14: Tape Drawings

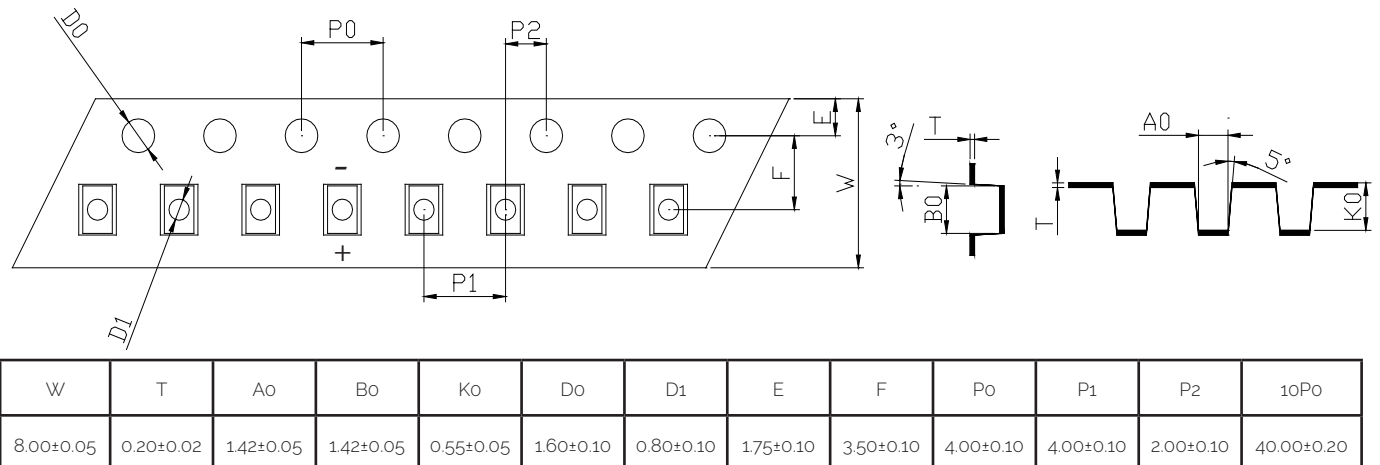


Note for Figure 14:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Packaging

Figure 15: Reel Packaging Drawings

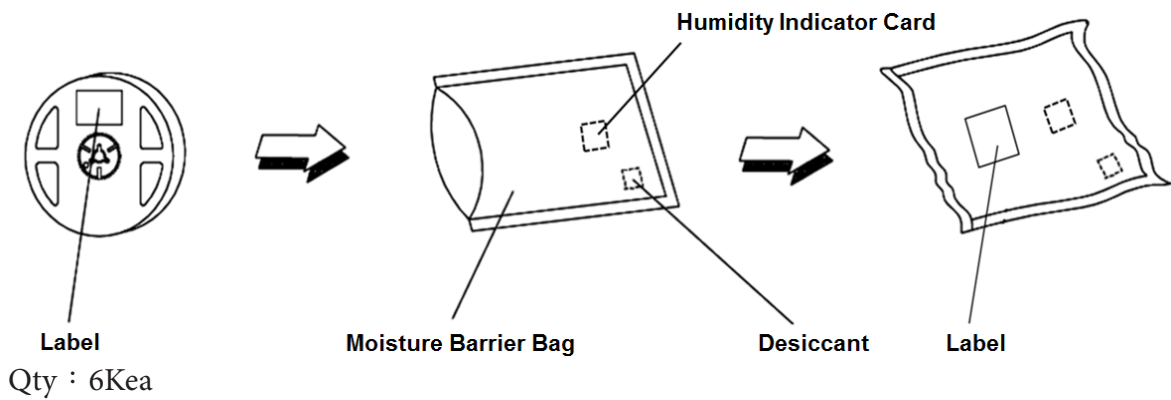

Note for Figure 15:
1. Drawings are not to scale.

Design Resources

Optical Source Models

Please contact your Bridgelux sales representative for assistance.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the CSP.

CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux CSP is in accordance with IEC specification 62471: Photobiological Safety of Lamps and Lamp Systems. Most Bridgelux CSPs are classified as Risk Group Exempt or Risk Group 1 in accordance with IEC specification 62471. However, the CSP LEDs will be classified as Risk Group 2 when operated at high power conditions with high ratio blue wavelength in the emission spectrum depending on characteristics. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.




CAUTION: RISK OF BURN

Do not touch the CSP LES during operation. Allow the CSP to cool for a sufficient period of time before handling. The CSP may reach elevated temperatures such that could burn skin when touched.

CAUTION: PICK AND PLACE

Recommend using Teflon material for nozzle. Sharp steel material must not be used as pick up tools.

CAUTION



Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, LED emitter testing is performed at the nominal drive current.

About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
WeChat ID: BridgeluxInChina



46410 Fremont Boulevard
Fremont, CA 94538 U.S.A.
Tel (925) 583-8400
www.bridgelux.com