


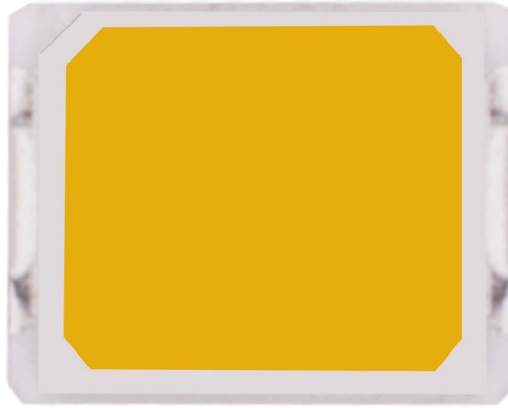

Bridgelux® SMD 2835 0.2W 3V

Product Data Sheet DS1537

Introduction

SMD 2835



Features

- Industry-standard 2835 footprint
- Cold-color targeting ensures that color is within the ANSI bin at the typical application conditions of 25°C
- RoHS compliant and lead free

Benefits


- Lower operating and manufacturing cost
- Ease of design and rapid go-to-market
- Uniform, consistent white light
- Reliable and constant white point
- Compliant with environmental standards
- Design flexibility

Contents

Product Feature Map	2
Product Nomenclature	2
Product Selection Guide	3
Electrical Characteristics	5
Absolute Maximum Ratings	6
Product Bin Definitions	7
Performance Curves	10
Typical Radiation Pattern	13
Typical Color Spectrum	14
Mechanical Dimensions	15
Reliability	16
Reflow Characteristics	17
Packaging	18
Design Resources	20
Precautions	20
Disclaimers	20
About Bridgelux	21


Product Feature Map

Bridgelux SMD LED products come in industry standard package sizes and follow ANSI binning standards. These LEDs are optimized for cost and performance, helping to ensure highly competitive system lumen per dollar performance while addressing the stringent efficacy and reliability standards required for modern lighting applications.

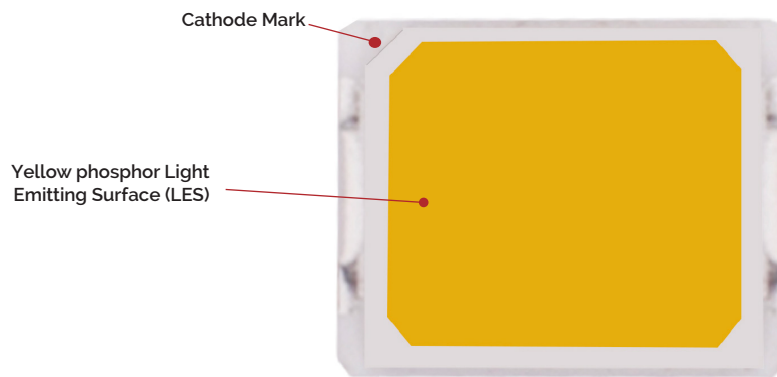

Product Nomenclature

The part number designation for Bridgelux SMD 2835 is explained as follows:

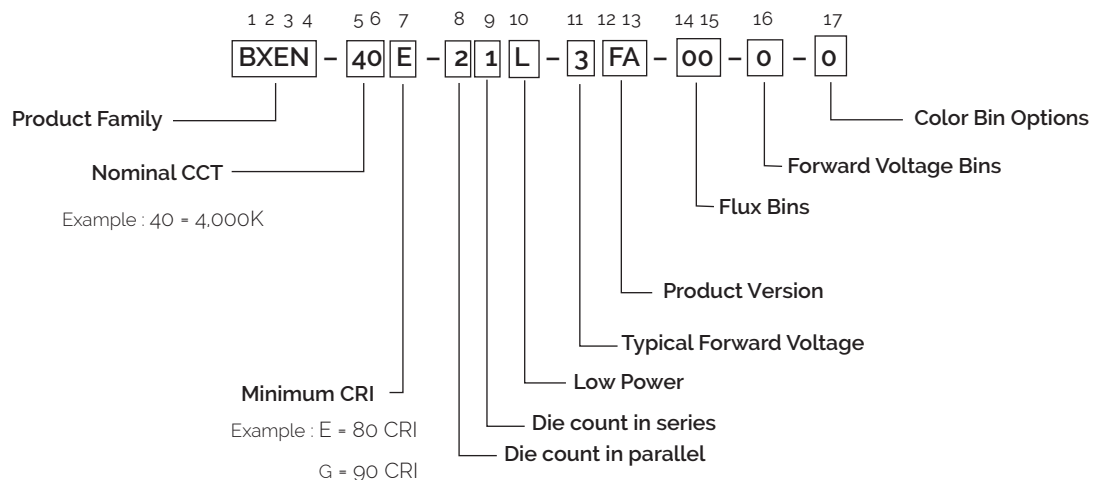

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data at 65mA ($T_j = T_{sp} = 25^\circ\text{C}$)

Part Number ^{1,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical Pulsed Flux (lm) ^{4,5}	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXEN-18E-21L-3FA-00-0-0	1800	80	65	2.60	2.72	2.90	24.3	0.2	137
BXEN-18G-21L-3FA-00-0-0	1800	90	65	2.60	2.72	2.90	20.7	0.2	117
BXEN-22E-21L-3FA-00-0-0	2200	80	65	2.60	2.72	2.90	30.1	0.2	170
BXEN-22G-21L-3FA-00-0-0	2200	90	65	2.60	2.72	2.90	25.6	0.2	145
BXEN-27E-21L-3FA-00-0-0	2700	80	65	2.60	2.72	2.90	33.8	0.2	191
BXEN-27G-21L-3FA-00-0-0	2700	90	65	2.60	2.72	2.90	28.7	0.2	162
BXEN-30E-21L-3FA-00-0-0	3000	80	65	2.60	2.72	2.90	35.6	0.2	201
BXEN-30G-21L-3FA-00-0-0	3000	90	65	2.60	2.72	2.90	30.3	0.2	171
BXEN-35E-21L-3FA-00-0-0	3500	80	65	2.60	2.72	2.90	35.6	0.2	201
BXEN-35G-21L-3FA-00-0-0	3500	90	65	2.60	2.72	2.90	30.3	0.2	171
BXEN-40E-21L-3FA-00-0-0	4000	80	65	2.60	2.72	2.90	37.5	0.2	212
BXEN-40G-21L-3FA-00-0-0	4000	90	65	2.60	2.72	2.90	31.9	0.2	180
BXEN-50E-21L-3FA-00-0-0	5000	80	65	2.60	2.72	2.90	37.5	0.2	212
BXEN-50G-21L-3FA-00-0-0	5000	90	65	2.60	2.72	2.90	31.9	0.2	180
BXEN-57E-21L-3FA-00-0-0	5700	80	65	2.60	2.72	2.90	37.5	0.2	212
BXEN-57G-21L-3FA-00-0-0	5700	90	65	2.60	2.72	2.90	31.9	0.2	180
BXEN-65E-21L-3FA-00-0-0	6500	80	65	2.60	2.72	2.90	37.5	0.2	212
BXEN-65G-21L-3FA-00-0-0	6500	90	65	2.60	2.72	2.90	31.9	0.2	180

Table 2: Selection Guide, Pulsed Test Performance ($T_{sp} = 85^\circ\text{C}$)

Part Number ^{1,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical Pulsed Flux (lm) ^{4,5}	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXEN-18E-21L-3FA-00-0-0	1800	80	65	2.54	2.66	2.84	22.3	0.2	129
BXEN-18G-21L-3FA-00-0-0	1800	90	65	2.54	2.66	2.84	19.0	0.2	110
BXEN-22E-21L-3FA-00-0-0	2200	80	65	2.54	2.66	2.84	27.6	0.2	160
BXEN-22G-21L-3FA-00-0-0	2200	90	65	2.54	2.66	2.84	23.5	0.2	136
BXEN-27E-21L-3FA-00-0-0	2700	80	65	2.54	2.66	2.84	31.0	0.2	179
BXEN-27G-21L-3FA-00-0-0	2700	90	65	2.54	2.66	2.84	26.3	0.2	152
BXEN-30E-21L-3FA-00-0-0	3000	80	65	2.54	2.66	2.84	32.7	0.2	189
BXEN-30G-21L-3FA-00-0-0	3000	90	65	2.54	2.66	2.84	27.8	0.2	161
BXEN-35E-21L-3FA-00-0-0	3500	80	65	2.54	2.66	2.84	32.7	0.2	189
BXEN-35G-21L-3FA-00-0-0	3500	90	65	2.54	2.66	2.84	27.8	0.2	161
BXEN-40E-21L-3FA-00-0-0	4000	80	65	2.54	2.66	2.84	34.4	0.2	199
BXEN-40G-21L-3FA-00-0-0	4000	90	65	2.54	2.66	2.84	29.3	0.2	169
BXEN-50E-21L-3FA-00-0-0	5000	80	65	2.54	2.66	2.84	34.4	0.2	199
BXEN-50G-21L-3FA-00-0-0	5000	90	65	2.54	2.66	2.84	29.3	0.2	169
BXEN-57E-21L-3FA-00-0-0	5700	80	65	2.54	2.66	2.84	34.4	0.2	199
BXEN-57G-21L-3FA-00-0-0	5700	90	65	2.54	2.66	2.84	29.3	0.2	169
BXEN-65E-21L-3FA-00-0-0	6500	80	65	2.54	2.66	2.84	34.4	0.2	199
BXEN-65G-21L-3FA-00-0-0	6500	90	65	2.54	2.66	2.84	29.3	0.2	169

Product Selection Guide

Notes for Tables 1 & 2:

1. The last 6 characters (including hyphens '-') refer to flux bins, forward voltage bins, and color bin options, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and color bin.
Example: BXEN-40E-21L-3FA-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 4000K 5-step ANSI standard chromaticity region with a minimum of 80 CRI, 2x1 die configuration, low power, 2.72V typical forward voltage.
2. Product CCT is cold targeted at $T_{sp} = 25^{\circ}\text{C}$. Nominal CCT as defined by ANSI C78.377-2011.
3. Listed CRIs are minimum values.
4. Products tested under pulsed condition (10ms pulse width) at nominal drive current.
5. Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous flux measurements, $\pm 0.1\text{V}$ tolerance on forward voltage measurements, and ± 2 tolerance on CRI measurements for the SMD 2835.
6. Refer to Table 5 and Table 6 for Bridgelux SMD 2835 Luminous Flux Binning and Forward Voltage Binning information.
7. Typical pulsed test performance values are provided as reference only and are not a guarantee of performance.
8. Typical performance is estimated based on operation under pulsed current with LED emitter mounted onto a heat sink with thermal interface material and the solder point temperature maintained at 25°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and the exposed environment to which the product is subjected.

Electrical Characteristics

Table 3: Electrical Characteristics

Part Number	Drive Current (mA)	Forward Voltage (V) ^{1,2}			Typical Temperature Coefficient of Forward Voltage $\Delta V_f / \Delta T$ (mV/°C)	Typical Thermal Resistance Junction to Solder Point ³ R_{j-sp} (°C/W)
		Minimum	Typical	Maximum		
BXEN-XXX-21L-3FA-00-0-0	65	2.60	2.72	2.90	-1.03	12.4

Notes for Table 3:

1. Bridgelux maintains a tolerance of $\pm 0.1V$ on forward voltage measurements. Voltage minimum and maximum values at the nominal drive current are guaranteed by 100% test.
2. Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_{sp} = 25^{\circ}C$.
3. Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power.

Absolute Maximum Ratings

Table 4: Maximum Ratings

Parameter	Maximum Rating
LED Junction Temperature (T_j)	125°C
Storage Temperature	-40°C to +105°C
Operating Solder Point Temperature (T_{sp})	-40°C to +105°C
Soldering Temperature	260°C or lower for a maximum of 10 seconds
Maximum Drive Current	350mA
Maximum Peak Pulsed Forward Current ¹	450mA
Maximum Reverse Voltage ²	-
Moisture Sensitivity Rating	MSL 3
Electrostatic Discharge	2kV HBM. JEDEC-JS-001-HBM and JEDEC-JS-001-2012

Notes for Table 4:

1. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 10 ms when operating LED SMD at maximum peak pulsed current specified. Maximum peak pulsed current indicate values where LED SMD can be driven without catastrophic failures.
2. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. no rating is provided.

Product Bin Definitions

Table 5 lists the standard photometric luminous flux bins for Bridgelux SMD 2835 LEDs. Although several bins are listed, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

Table 5: Luminous Flux Bin Definitions at 65mA, $T_{sp}=25^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
18	18	20	lm	$I_F=65\text{mA}$
19	20	22		
1A	22	24		
1B	24	26		
1C	26	28		
1D	28	30		
1E	30	32		
1F	32	34		
1G	34	36		
1H	36	38		
1J	38	40		

Note for Table 5:

1. Bridgelux maintains a tolerance of $\pm 7.5\%$ on luminous flux measurements.

Table 6: Forward Voltage Bin Definition at 65mA, $T_{sp}=25^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
8	2.6	2.7	V	$I_F=65\text{mA}$
9	2.7	2.8		
A	2.8	2.9		

Note for Table 6:

1. Bridgelux maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

Product Bin Definitions

Table 7: MacAdam Ellipse Color Bin Definitions


CCT	Color Space	Center Point		Major Axis	Minor Axis	Ellipse Rotation Angle	Color Bin
		X	Y				
1800K	2 SDCM	0.5496	0.4081	0.0066	0.0032	48.00	2
	3 SDCM	0.5496	0.4081	0.0099	0.0048	48.00	3
	5 SDCM	0.5496	0.4081	0.0165	0.008	48.00	2/3/A/B/C/D
2200K	2 SDCM	0.5018	0.4153	0.0064	0.00294	51.67	2
	3 SDCM	0.5018	0.4153	0.0096	0.0044	51.67	3
	5 SDCM	0.5018	0.4153	0.0160	0.0074	51.67	2/3/A/B/C/D
2700K	2 SDCM	0.4578	0.4101	0.0054	0.0028	53.70	2
	3 SDCM	0.4578	0.4101	0.0081	0.0042	53.70	3
	5 SDCM	0.4578	0.4101	0.0135	0.007	53.70	2/3/A/B/C/D
3000K	2 SDCM	0.4338	0.4030	0.00556	0.00272	53.22	2
	3 SDCM	0.4338	0.4030	0.00834	0.00408	53.22	3
	5 SDCM	0.4338	0.4030	0.0139	0.0068	53.22	2/3/A/B/C/D
3500K	2 SDCM	0.4078	0.3930	0.00618	0.00276	54.00	2
	3 SDCM	0.4078	0.3930	0.00927	0.00414	54.00	3
	5 SDCM	0.4078	0.3930	0.01545	0.0069	54.00	2/3/A/B/C/D
4000K	2 SDCM	0.3818	0.3797	0.00626	0.00268	53.72	2
	3 SDCM	0.3818	0.3797	0.00939	0.00402	53.72	3
	5 SDCM	0.3818	0.3797	0.01565	0.0067	53.72	2/3/A/B/C/D
5000K	2 SDCM	0.3447	0.3553	0.00548	0.00236	59.62	2
	3 SDCM	0.3447	0.3553	0.00822	0.00354	59.62	3
	5 SDCM	0.3447	0.3553	0.0137	0.0059	59.62	2/3/A/B/C/D
5700K	2 SDCM	0.3287	0.3417	0.00497	0.00213	59.09	2
	3 SDCM	0.3287	0.3417	0.00746	0.00320	59.09	3
	5 SDCM	0.3287	0.3417	0.01243	0.0053	59.09	2/3/A/B/C/D
6500K	2 SDCM	0.3123	0.3282	0.00446	0.0019	58.57	2
	3 SDCM	0.3123	0.3282	0.00669	0.00285	58.57	3
	5 SDCM	0.3123	0.3282	0.01115	0.00475	58.57	2/3/A/B/C/D

Notes for Table 7:

1. Color binning at $T_{sp}=25^{\circ}\text{C}$ unless otherwise specified
2. Bridgelux maintains a tolerance of ± 0.007 on x and y color coordinates in the CIE 1931 color space.

Product Bin Definitions

Figure 1: C.I.E. 1931 Chromaticity Diagram (Cold-color Targeted at $T_{sp}=25^{\circ}\text{C}$)

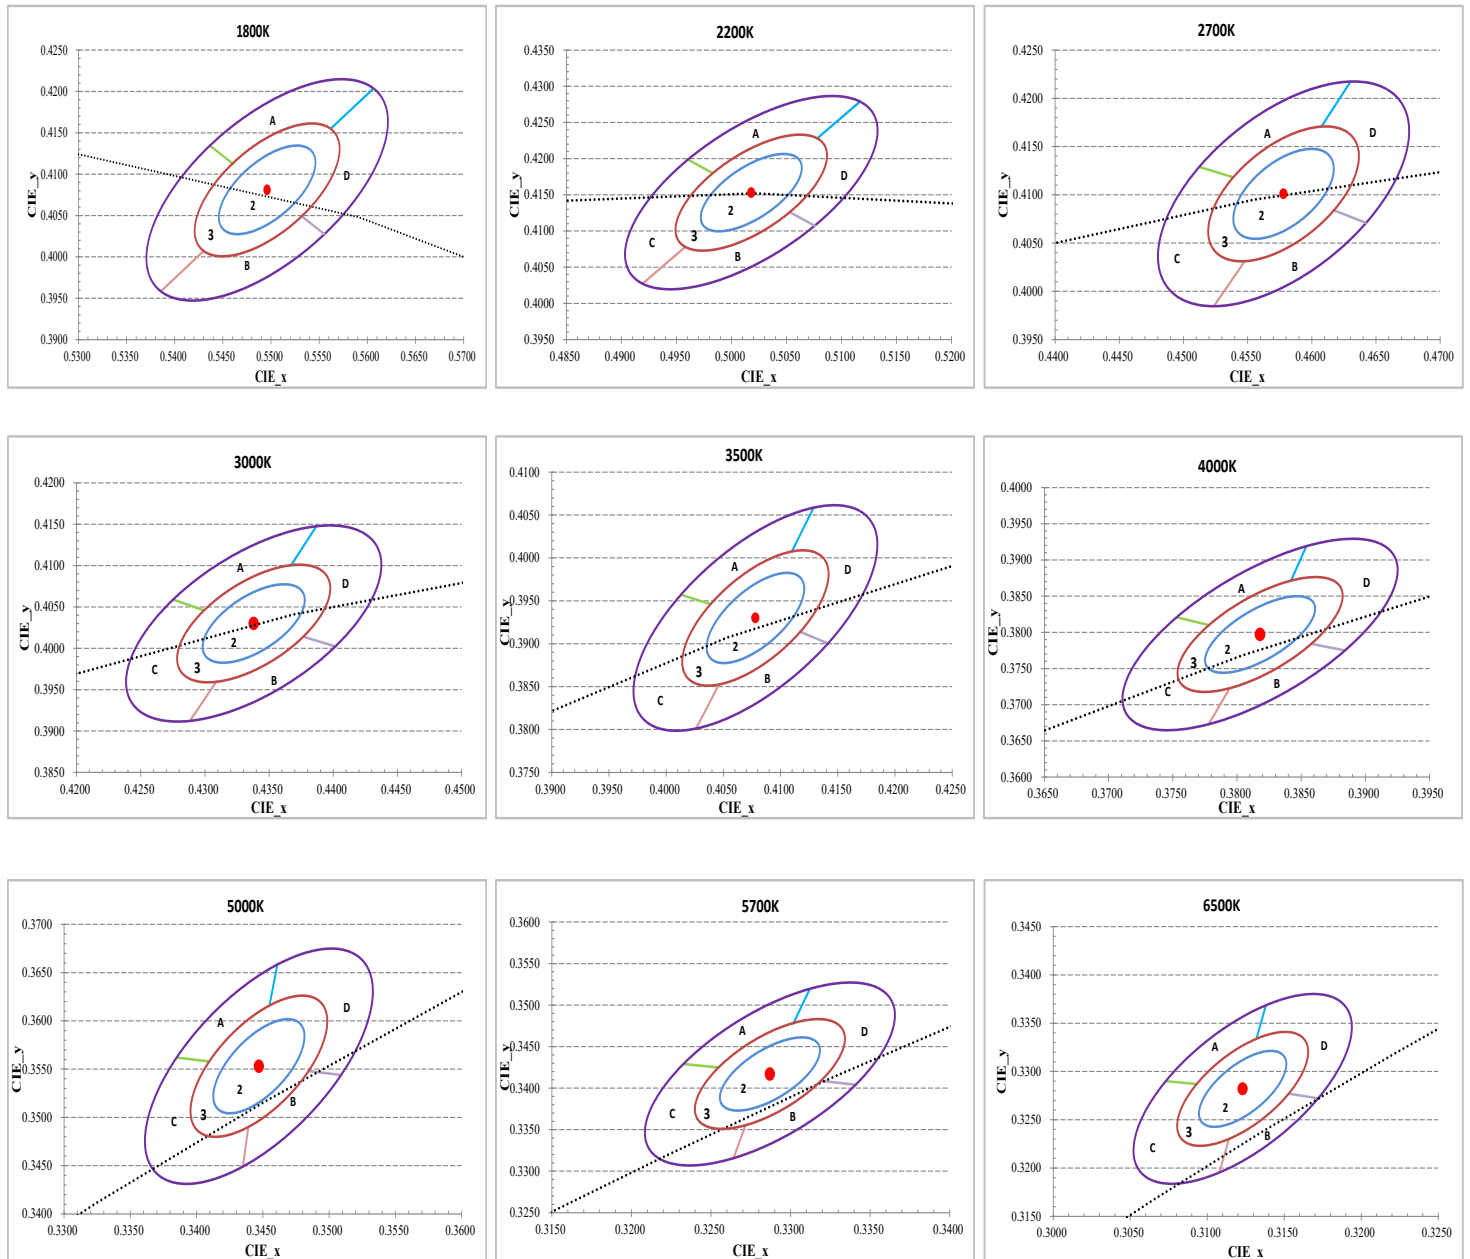

Performance Curves

Figure 2: Drive Current vs. Forward Voltage ($T_{sp}=25^{\circ}\text{C}$)


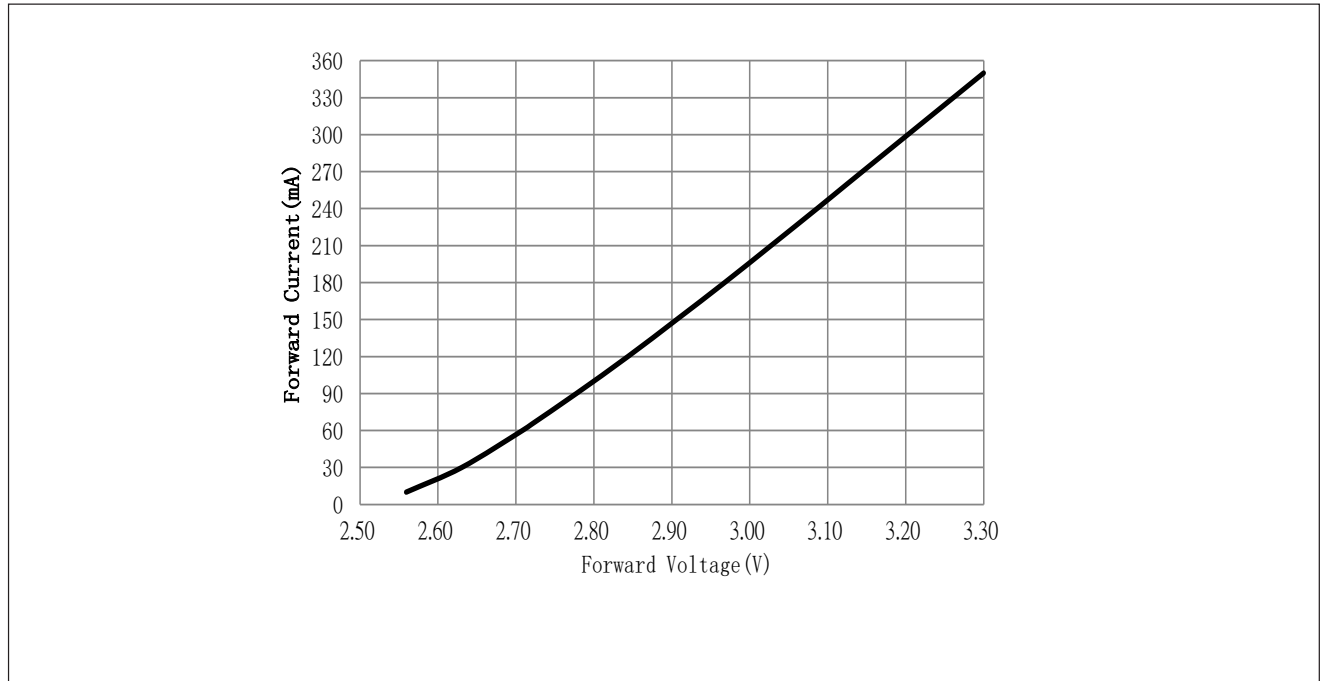


Figure 3: Relative Luminous Flux vs. Forward Current ($T_{sp}=25^{\circ}\text{C}$)

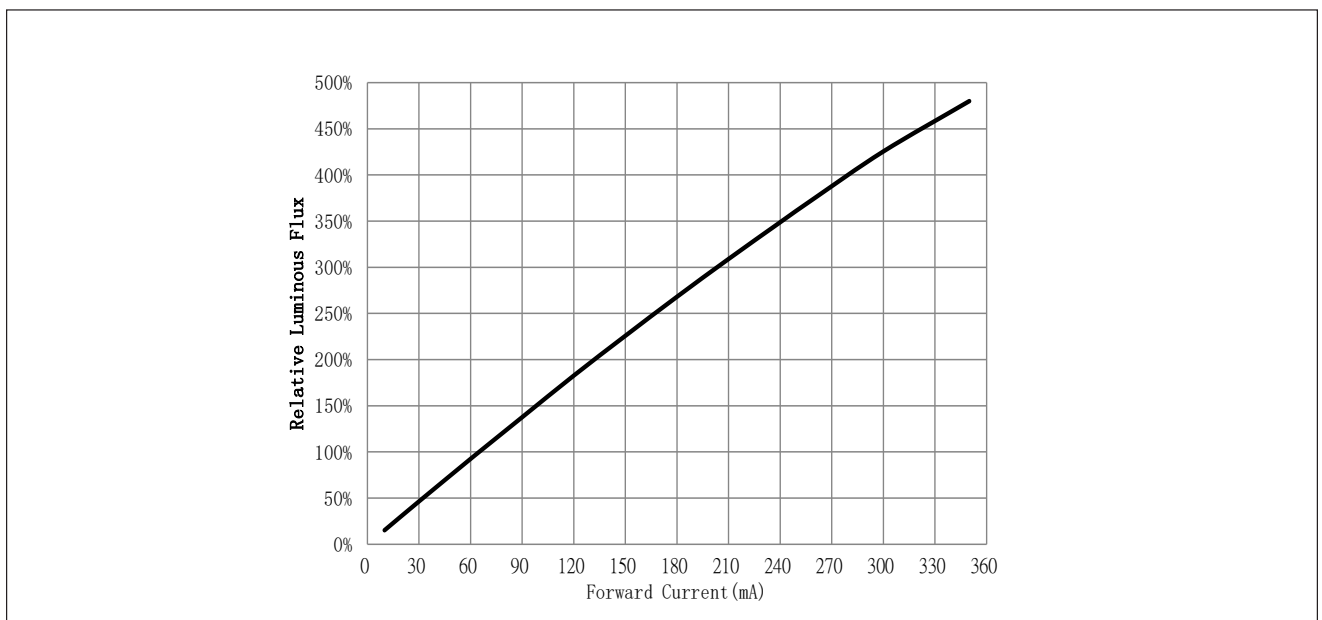

Note for Figure 3:

1. Pulse width modulation (PWM) is recommended for dimming effects.

Performance Curves

Figure 4: Relative Flux vs. Solder Point Temperature


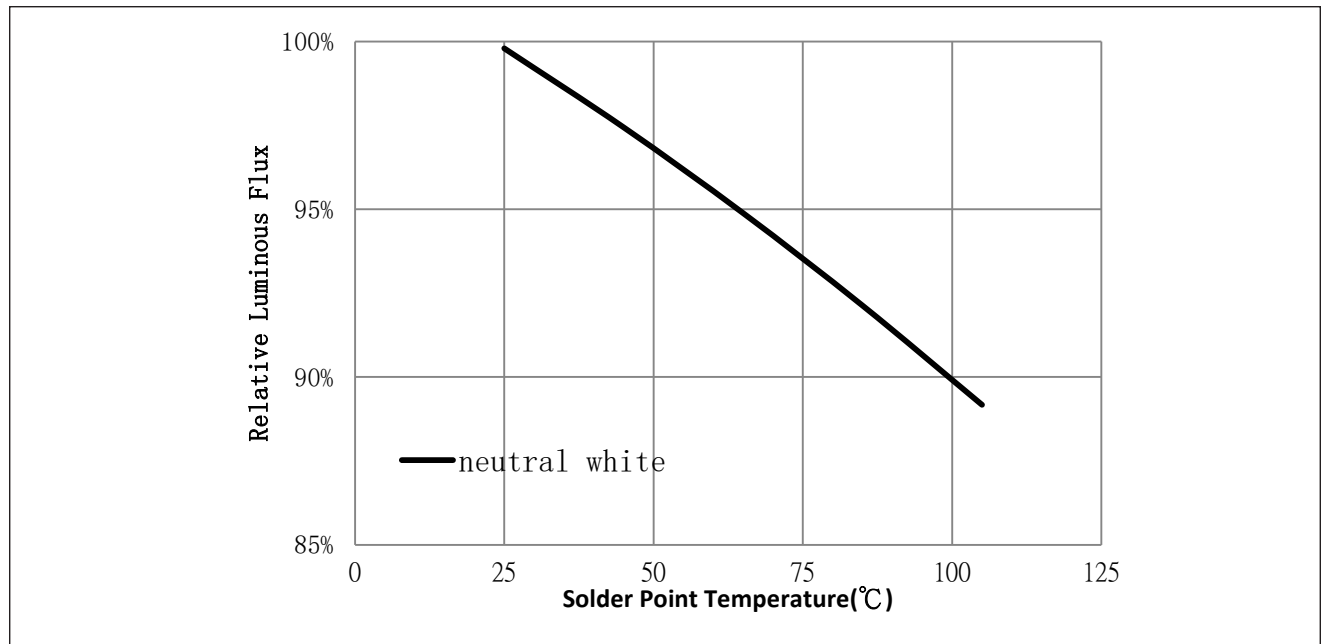


Figure 5: Typical ccx Shift vs. Solder Point Temperature

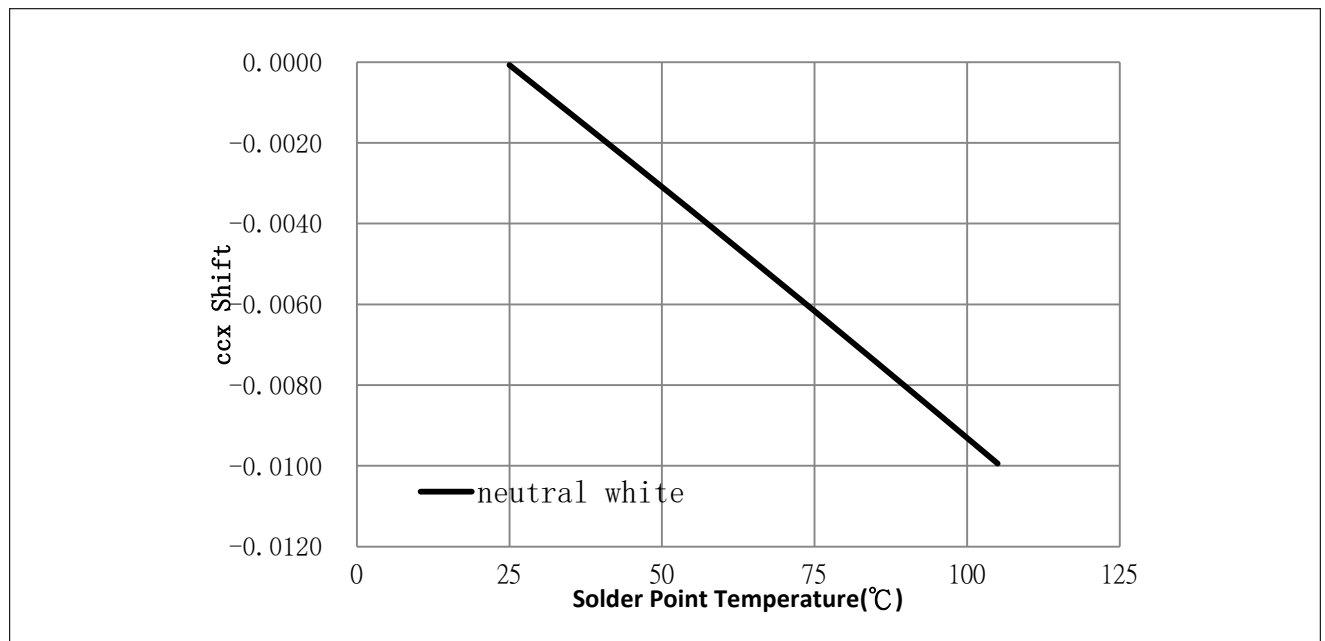


Notes for Figures 4 & 5:

1. Characteristics shown for neutral white based on 4000K and 80 CRI.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Performance Curves

Figure 6: Typical ccy Shift vs. Solder Point Temperature

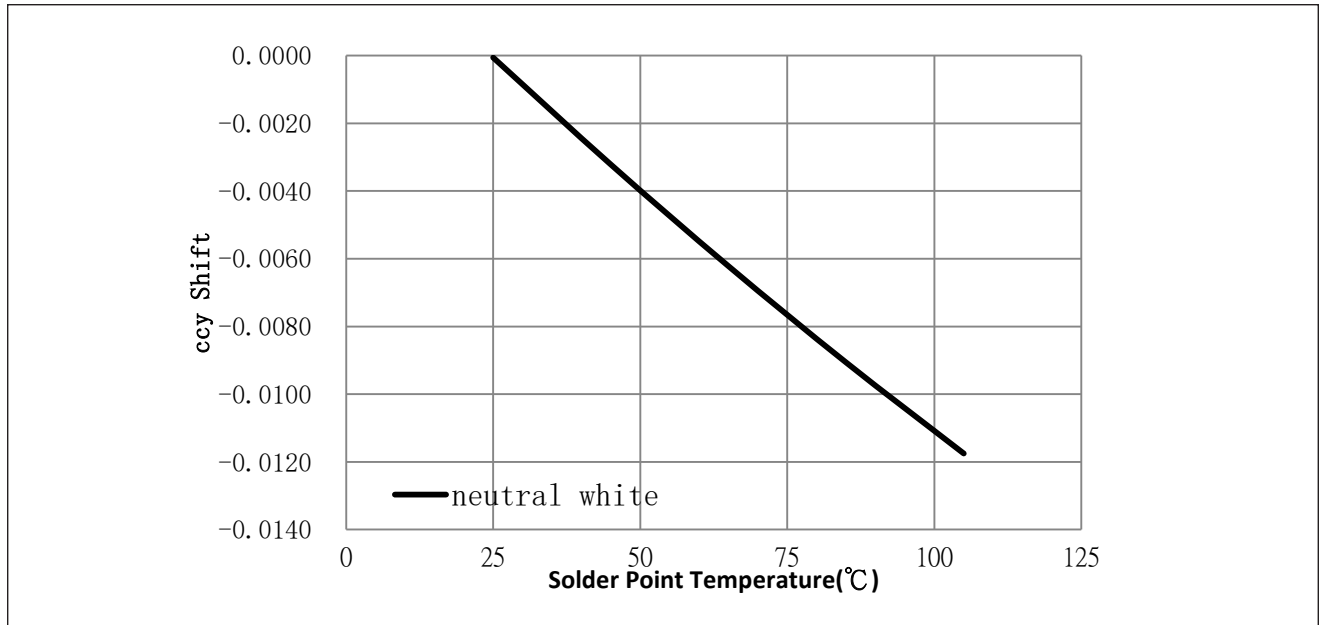


Notes for Figure 6:

1. Characteristics shown for neutral white based on 4000K and 80 CRI.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Typical Radiation Pattern


Figure 7: Typical Spatial Radiation Pattern at 65mA, $T_{sp}=25^{\circ}\text{C}$

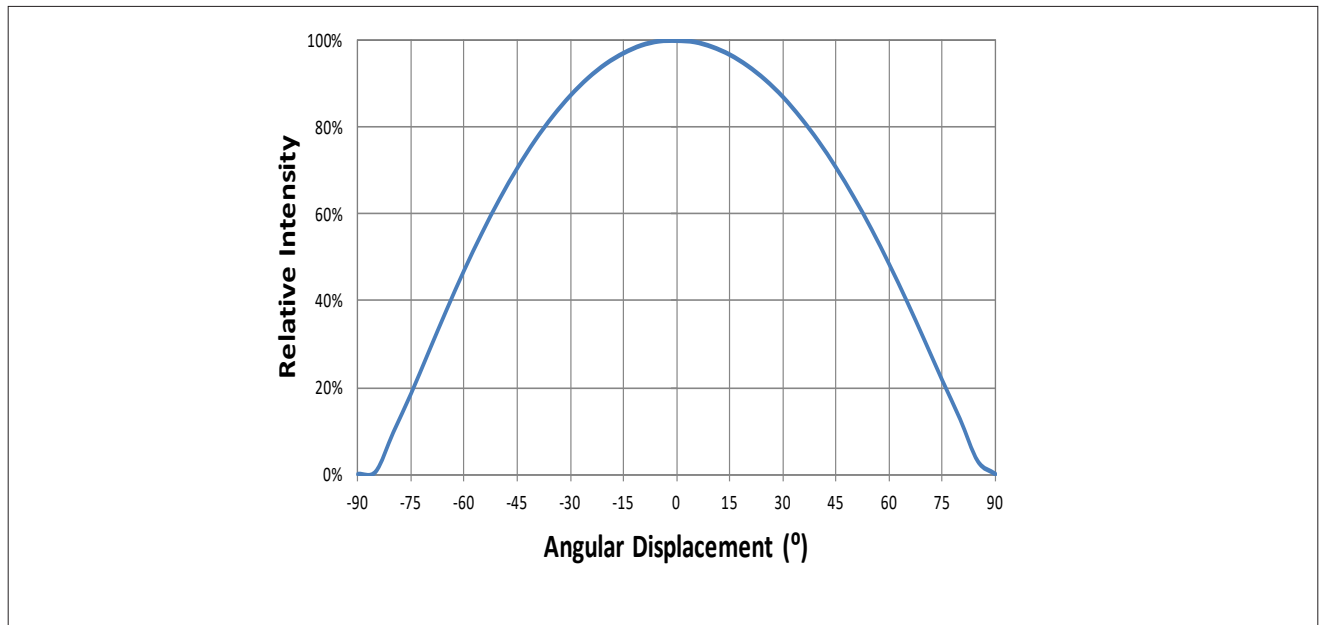

Notes for Figure 7:


1. Typical viewing angle is 120° .
2. The viewing angle is defined as the off axis angle from the centerline where luminous intensity (Iv) is $\frac{1}{2}$ of the peak value.

Figure 8: Typical Polar Radiation Pattern at 65mA, $T_{sp}=25^{\circ}\text{C}$

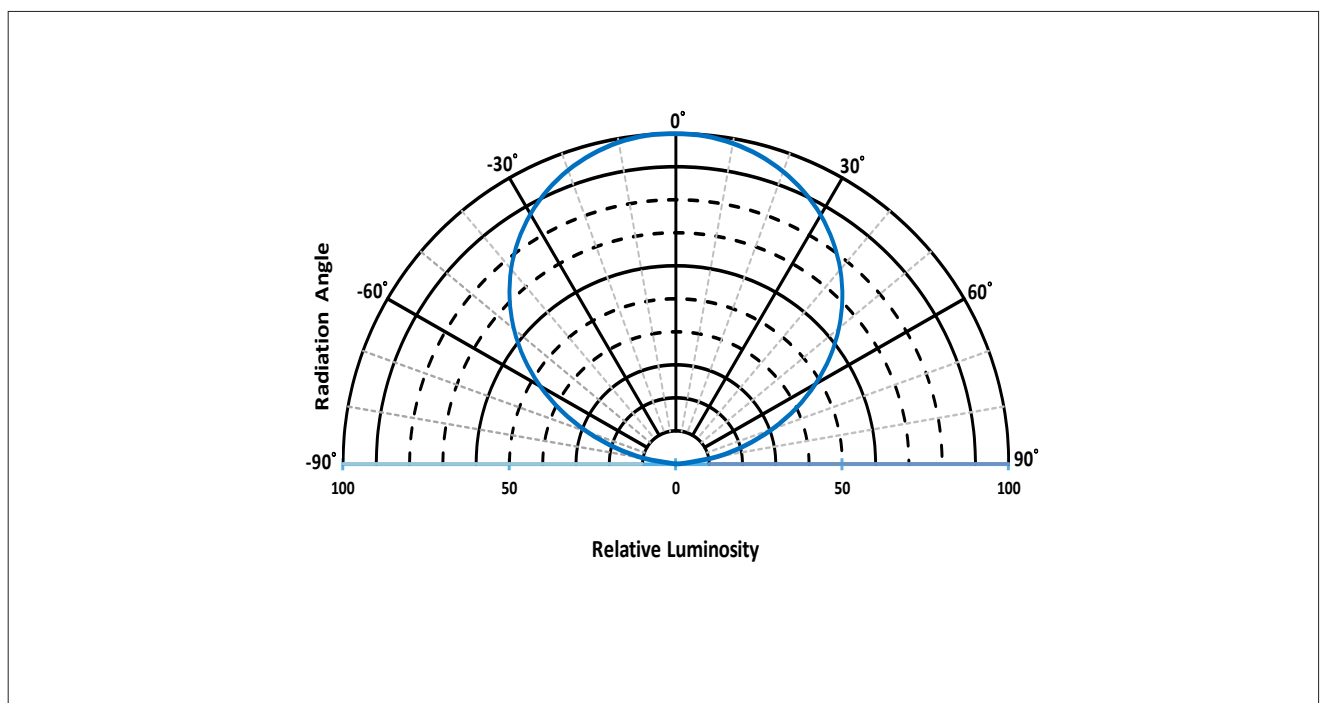

Typical Color Spectrum

Figure 9: Typical Color Spectrum

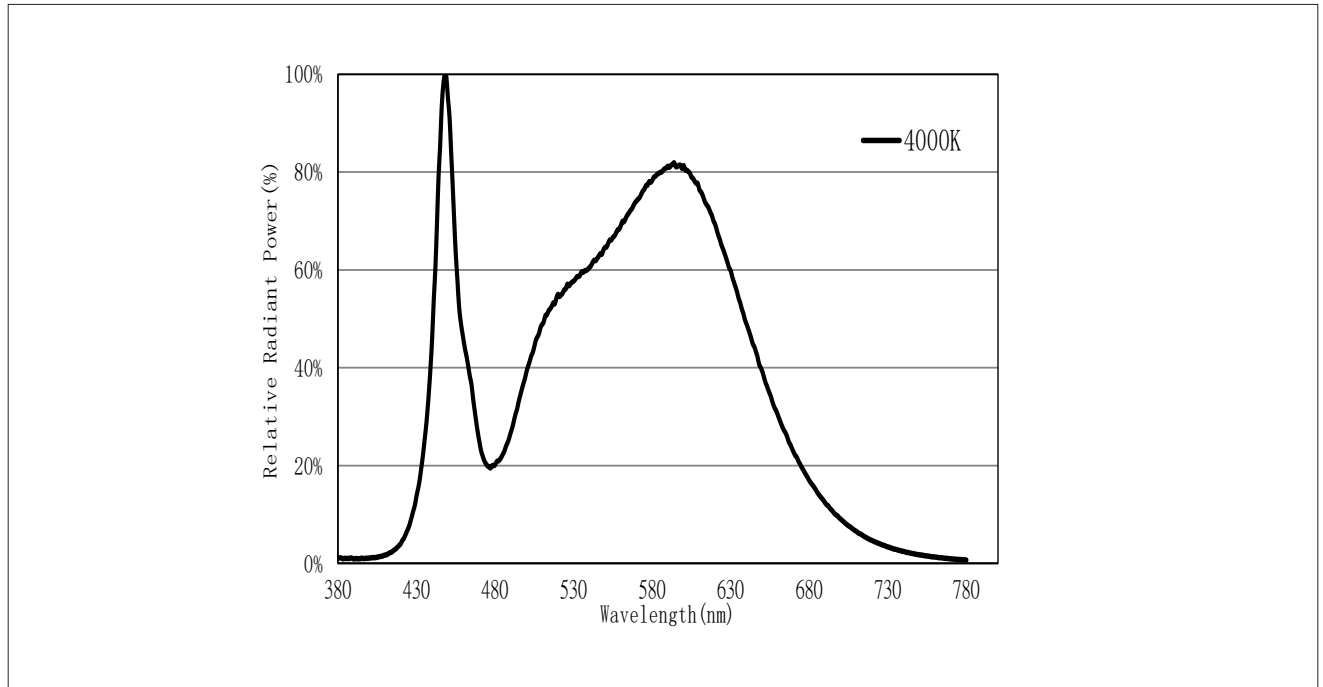


Notes for Figure 9:

1. Color spectra measured at nominal current for $T_{sp} = 25^{\circ}\text{C}$
2. Color spectra shown for 80 CRI products .

Mechanical Dimensions


Figure 10: Drawing for SMD 2835

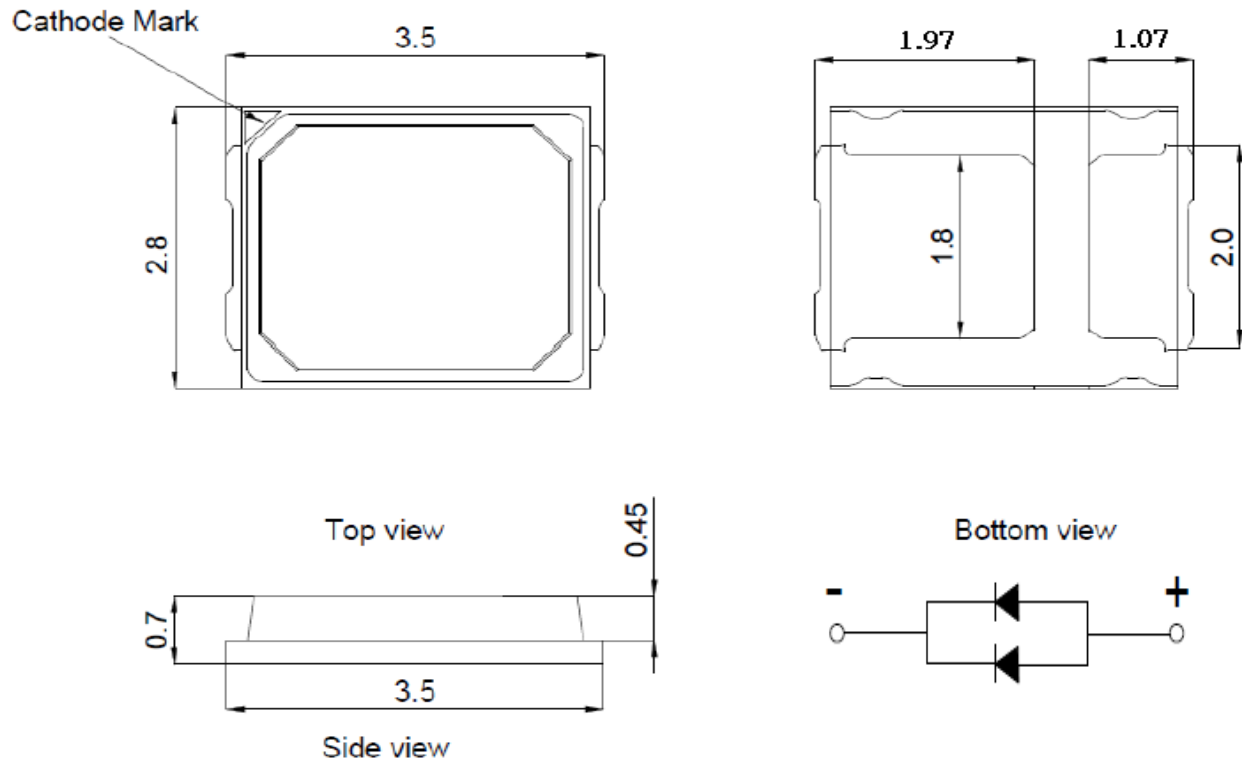

Notes for Figure 10:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Different mould pattern differences may.
4. Unless otherwise specified, tolerances are $\pm 0.10\text{mm}$.

Recommended PCB Soldering Pad Pattern

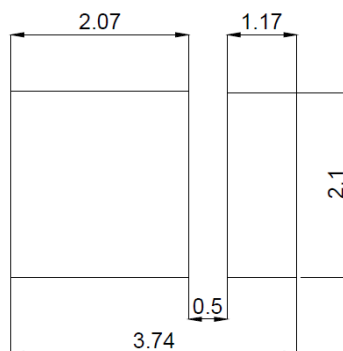

Reliability

Table 8: Reliability Test Items and Conditions

No .	Items	Reference Standard	Test Conditions	Drive Current	Test Duration	Units Failed/Tested
1	Moisture/Reflow Sensitivity	J-STD-020E	$T_{sld} = 260^{\circ}\text{C}$, 10sec, Precondition: 30°C , 60%RH, 168hr	-	3 reflows	0/20
2	Low Temperature Storage	JESD22-A119	$T_a = -40^{\circ}\text{C}$	-	1000 hours	0/20
3	High Temperature Storage	JESD22-A103D	$T_a = 100^{\circ}\text{C}$	-	1000 hours	0/20
4	Low Temperature Operating Life	JESD22-A108D	$T_a = -40^{\circ}\text{C}$	65mA	1000 hours	0/20
5	Temperature Humidity Operating Life	JESD22-A101C	$T_{sp} = 85^{\circ}\text{C}$, RH=85%	65mA	1000 hours	0/20
6	High Temperature Operating Life	JESD22-A108D	$T_{sp} = 105^{\circ}\text{C}$	350mA	1000 hours	0/20
7	Power switching	IEC62717:2014	$T_{sp} = 105^{\circ}\text{C}$ 30 sec on, 30 sec off	350mA	30000 cycles	0/20
8	Thermal Shock	JESD22-A106B	$T_a = -40^{\circ}\text{C} \sim 100^{\circ}\text{C}$; Dwell : 15min; Transfer: 10sec	-	200 cycles	0/20
9	Temperature Cycle	JESD22-A104E	$T_a = -40^{\circ}\text{C} \sim 100^{\circ}\text{C}$; Dwell at extreme temperature: 15min; Ramp rate $< 105^{\circ}\text{C}/\text{min}$	-	200 cycles	0/20
10	Electrostatic Discharge	JS-001-2012	HBM, 2kV, 15k Ω , 100pF, Alternately positive or negative	-	-	0/20

Passing Criteria


Item	Symbol	Test Condition	Passing Criteria
Forward Voltage	Vf	65mA	$\Delta Vf < 10\%$
Luminous Flux	Fv	65mA	$\Delta Fv < 30\%$
Chromaticity Coordinates	(x, y)	65mA	$\Delta u'v' < 0.007$

Notes for Table 8:

- Measurements are performed after allowing the LEDs to return to room temperature
- T_{sld} : reflow soldering temperature; T_a : ambient temperature

Reflow Characteristics


Figure 11 : Reflow Profile (Reflow frequency 2 times max)

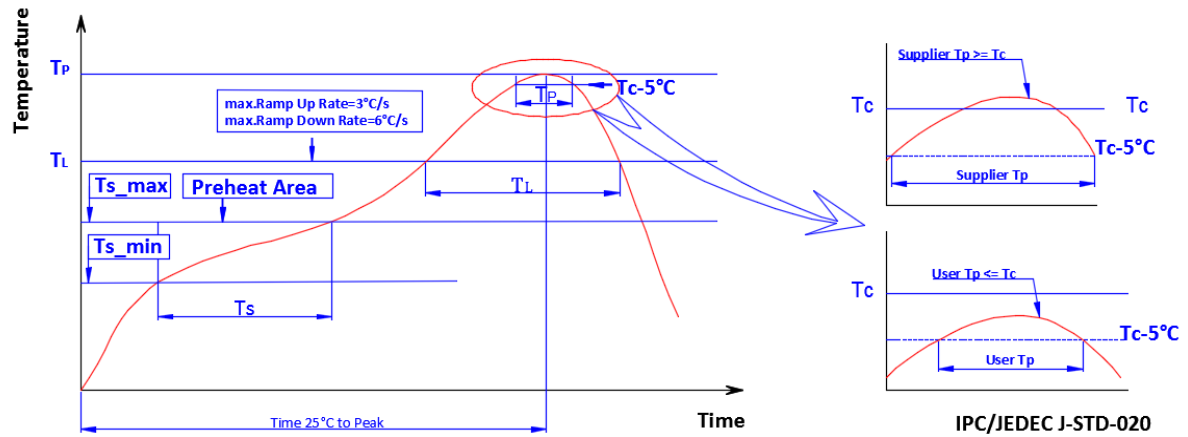

Profile Feature	Lead Free Assembly
Temperature Min. (Ts_min)	160°C
Temperature Max. (Ts_max)	205°C
Time (ts) from Ts_min to Ts_max	60-150 seconds
Ramp-Up Rate (TL to Tp)	3 °C/second
Liquidus Temperature (TL)	220 °C
Time (TL) Maintained Above TL	60-150 seconds
Peak Temp(Tp)	260 °C max 10 sec
Time (Tp) Within 5 °C of the Specified Classification Temperature (Tc)	25 seconds max.
Ramp-Down Rate (Tp to TL)	5 °C/second max.
Time 25 °C to Peak Temperature	10 minutes max.

Packaging


Figure 12: Emitter Reel Drawings

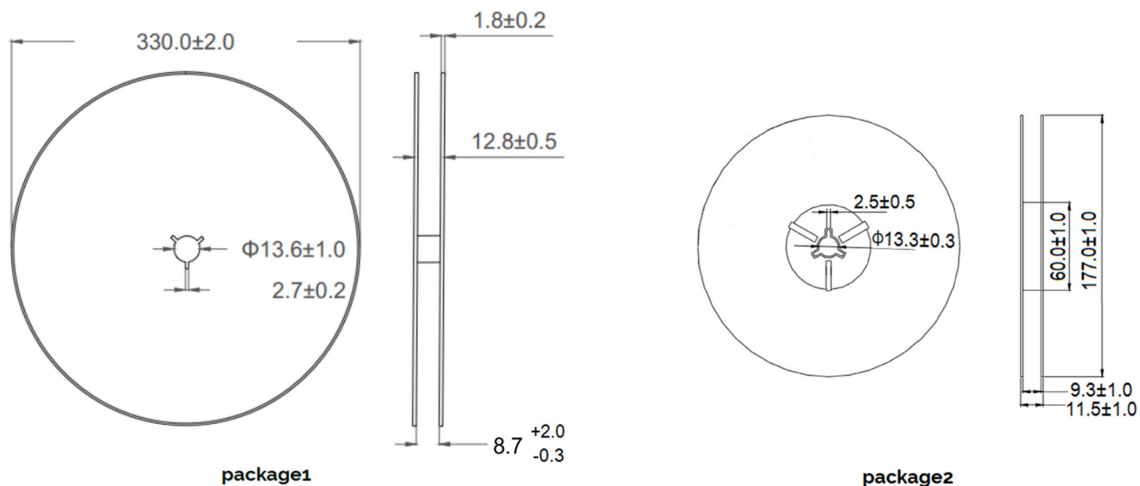

Note for Figure 12:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Figure 13: Emitter Tape Drawings

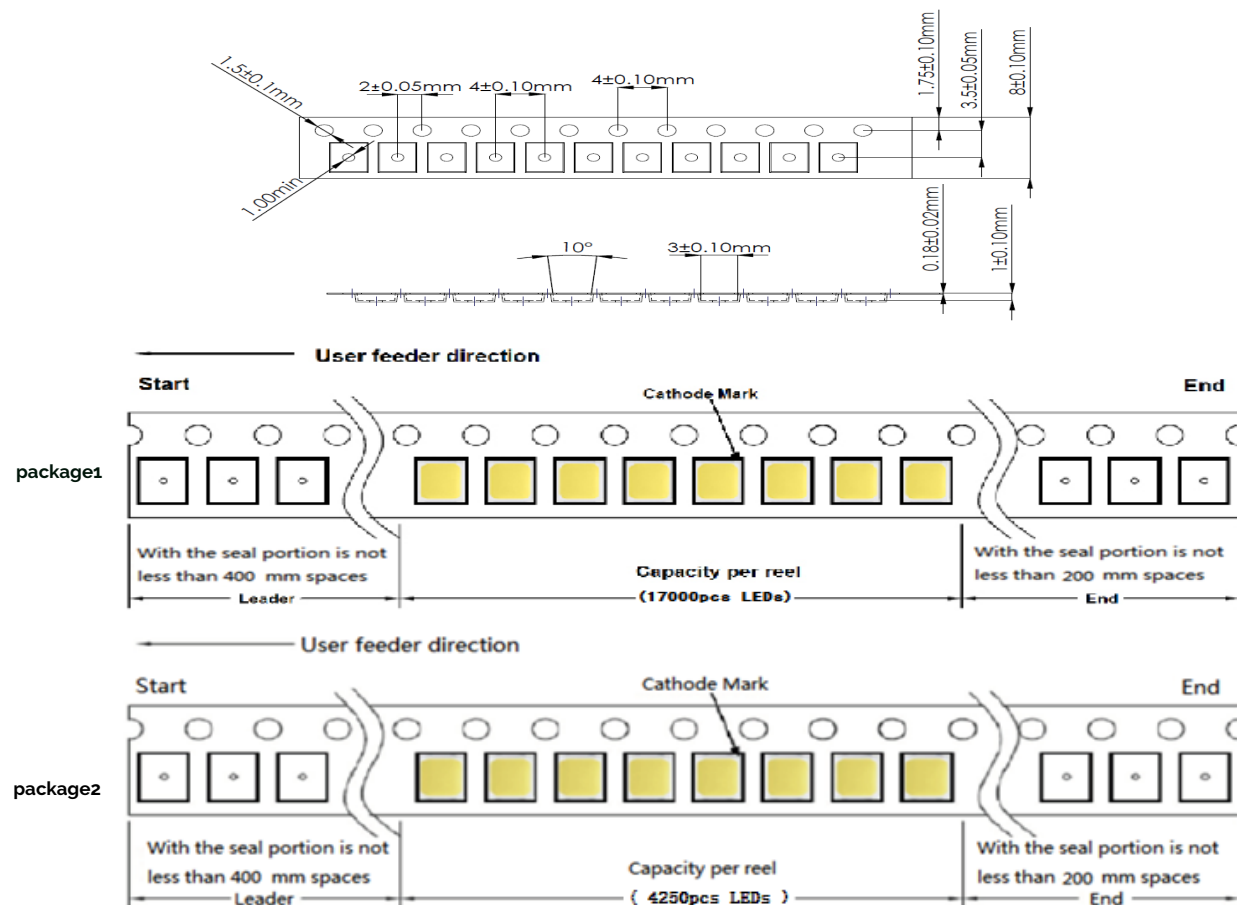


Note for Figure 13:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Packaging

Figure 14: Emitter Reel Packaging Drawings

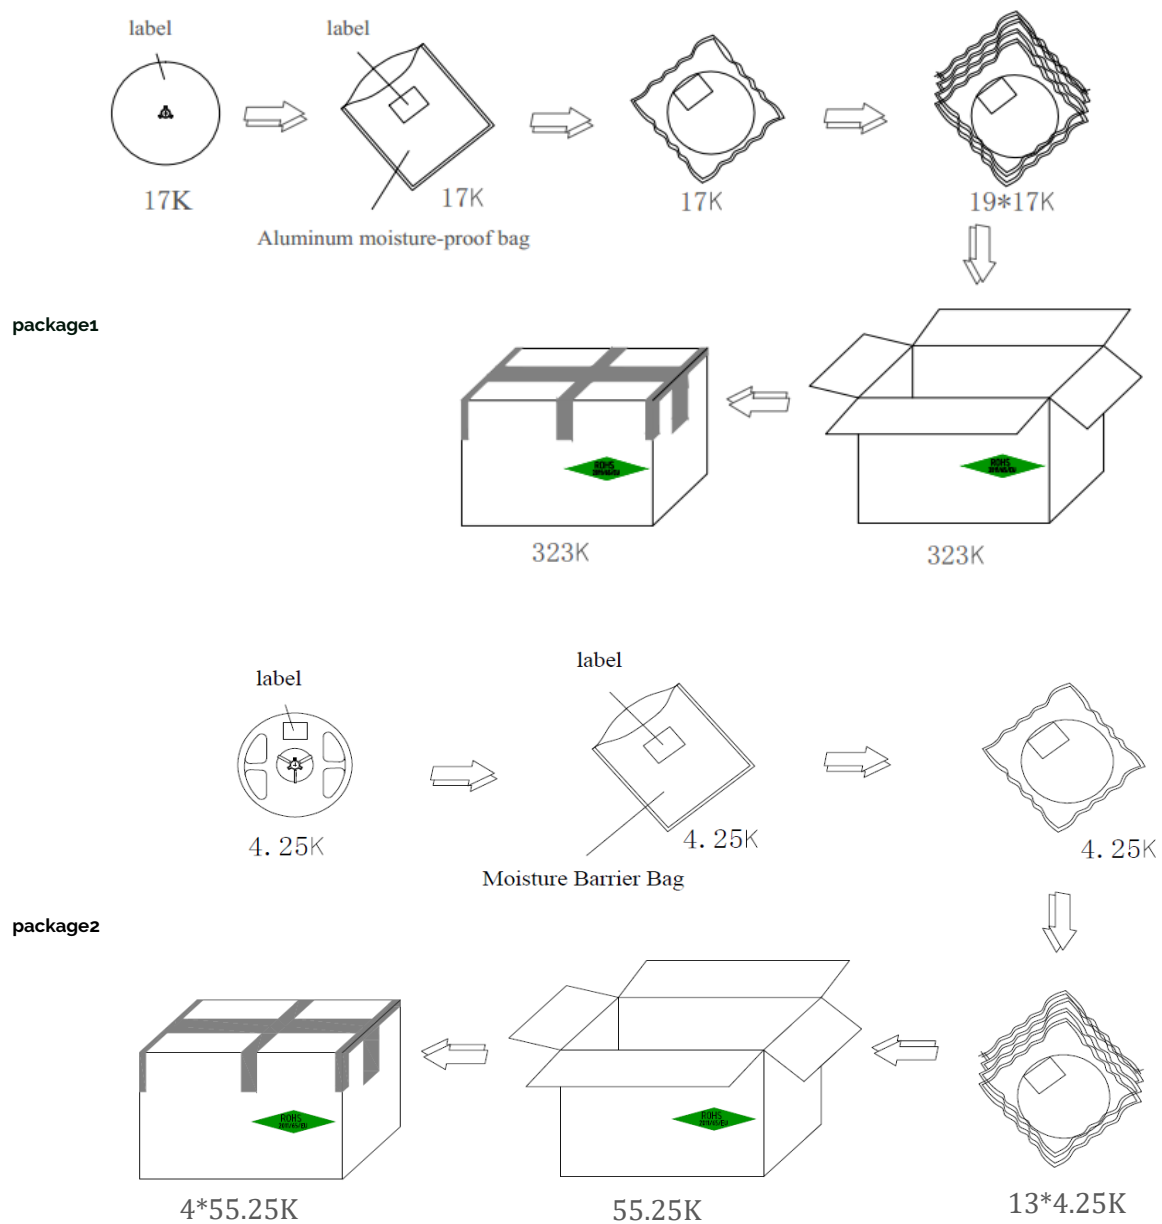

Note for Figure 14:

1. Drawings are not to scale.

Design Resources

Please contact your Bridgelux sales representative for assistance.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED emitter. Please consult Bridgelux Application Note AN51 for additional information.

CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux SMD LED emitter is in accordance with IEC specification EN62471: Photobiological Safety of Lamps and Lamp Systems. This product can be classified as Risk Group 1 or lower when operated at or below the maximum drive current. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

CAUTION: RISK OF BURN

Do not touch the SMD LED emitter during operation. Allow the emitter to cool for a sufficient period of time before handling. The SMD LED emitter may reach elevated temperatures such that could burn skin when touched.

CAUTION

CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the emitter or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the emitter

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area).

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, LED emitter testing is performed at the nominal drive current.

About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
youtube.com/user/Bridgelux
WeChat ID: BridgeluxInChina
https://www.linkedin.com/company/bridgelux-inc-_2



46410 Fremont Boulevard
Fremont, CA 94538 USA
Tel (925) 583-8400
Fax (925) 583-8401
www.bridgelux.com

© 2025 Bridgelux, Inc. All rights reserved 2025. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.