




Bridgelux® SMD 3030 1W 6V

Product Data Sheet DS297

Introduction

SMD 3030



Features

- Industry-standard 3030 footprint
- Enables 3- and 6-step MacAdam ellipse custom binning kits
- RoHS compliant and lead free
- Multiple CCT configurations for a wide range of lighting applications

Benefits


- Lower operating and manufacturing cost
- Ease of design and rapid go-to-market
- Uniform, consistent white light
- Reliable and constant white point
- Compliant with environmental standards
- Design flexibility

Contents

Product Feature Map	2
Product Nomenclature	2
Product Test Conditions	2
Product Selection Guide	3
Electrical Characteristics	6
Absolute Maximum Ratings	7
Product Bin Definitions	8
Performance Curves	13
Typical Radiation Pattern	16
Typical Color Spectrum	17
Mechanical Dimensions	18
Reliability	19
Reflow Characteristics	20
Packaging	21
Design Resources	23
Precautions	23
Disclaimers	23
About Bridgelux	24


Product Feature Map

Bridgelux SMD LED products come in industry standard package sizes and follow ANSI binning standards. These LEDs are optimized for cost and performance, helping to ensure highly competitive system lumen per dollar performance while addressing the stringent efficacy and reliability standards required for modern lighting applications.

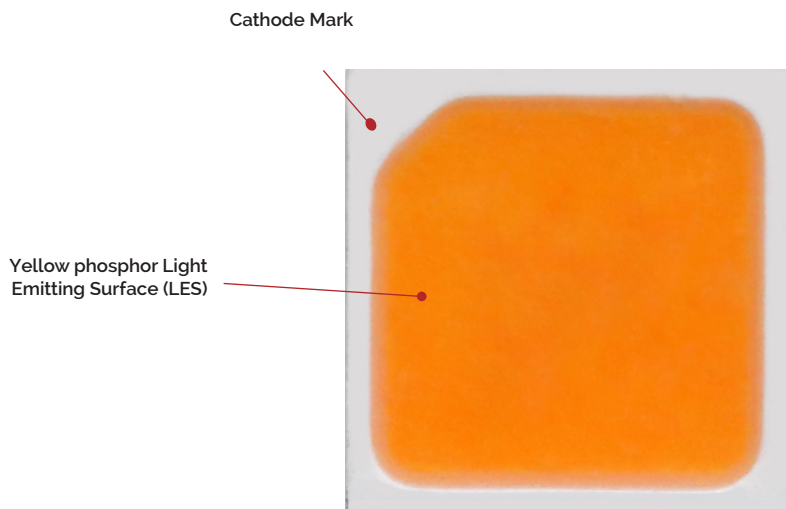

Product Nomenclature

The part number designation for Bridgelux SMD 3030 is explained as follows:

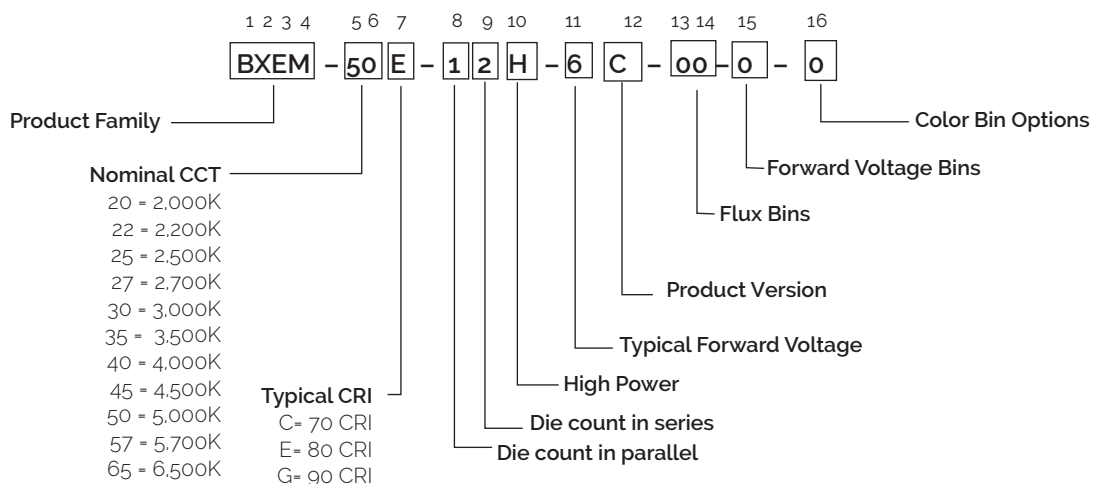

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data at 150mA ($T_j = T_{sp} = 25^\circ\text{C}$)

Part Number ^{1,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical Pulsed Flux (lm) ^{4,5}	Typical Power (W)	Typical Effi- cacy (lm/W)
				Min	Typical	Max			
BXEM-18C-12H-6C-00-0-0	1800	70	150	5.8	6.2	6.6	108	0.9	116
BXEM-20G-12H-6C-00-0-0	2000	90	150	5.8	6.2	6.6	100	0.9	108
BXEM-22C-12H-6C-00-0-0	2200	70	150	5.8	6.2	6.6	125	0.9	134
BXEM-22E-12H-6C-00-0-0	2200	80	150	5.8	6.2	6.6	114	0.9	123
BXEM-22G-12H-6C-00-0-0	2200	90	150	5.8	6.2	6.6	100	0.9	108
BXEM-25G-12H-6C-00-0-0	2500	90	150	5.8	6.2	6.6	106	0.9	114
BXEM-27C-12H-6C-00-0-0	2700	70	150	5.8	6.2	6.6	145	0.9	156
BXEM-27E-12H-6C-00-0-0	2700	80	150	5.8	6.2	6.6	133	0.9	143
BXEM-27G-12H-6C-00-0-0	2700	90	150	5.8	6.2	6.6	112	0.9	120
BXEM-30C-12H-6C-00-0-0	3000	70	150	5.8	6.2	6.6	150	0.9	161
BXEM-30E-12H-6C-00-0-0	3000	80	150	5.8	6.2	6.6	137	0.9	147
BXEM-30G-12H-6C-00-0-0	3000	90	150	5.8	6.2	6.6	116	0.9	125
BXEM-30G-12H-6CA-00-0-0	3000	90	150	5.8	6.2	6.6	110	0.9	118
BXEM-35C-12H-6C-00-0-0	3500	70	150	5.8	6.2	6.6	154	0.9	166
BXEM-35E-12H-6C-00-0-0	3500	80	150	5.8	6.2	6.6	140	0.9	151
BXEM-35G-12H-6C-00-0-0	3500	90	150	5.8	6.2	6.6	120	0.9	129
BXEM-40C-12H-6C-00-0-0	4000	70	150	5.8	6.2	6.6	158	0.9	170
BXEM-40E-12H-6C-00-0-0	4000	80	150	5.8	6.2	6.6	144	0.9	155
BXEM-40G-12H-6C-00-0-0	4000	90	150	5.8	6.2	6.6	124	0.9	133
BXEM-45C-12H-6C-00-0-0	4500	70	150	5.8	6.2	6.6	158	0.9	170
BXEM-45E-12H-6C-00-0-0	4500	80	150	5.8	6.2	6.6	144	0.9	155
BXEM-45G-12H-6C-00-0-0	4500	90	150	5.8	6.2	6.6	124	0.9	133
BXEM-50C-12H-6C-00-0-0	5000	70	150	5.8	6.2	6.6	158	0.9	170
BXEM-50E-12H-6C-00-0-0	5000	80	150	5.8	6.2	6.6	144	0.9	155
BXEM-50G-12H-6C-00-0-0	5000	90	150	5.8	6.2	6.6	124	0.9	133
BXEM-57C-12H-6C-00-0-0	5700	70	150	5.8	6.2	6.6	155	0.9	167
BXEM-57E-12H-6C-00-0-0	5700	80	150	5.8	6.2	6.6	143	0.9	154
BXEM-57G-12H-6C-00-0-0	5700	90	150	5.8	6.2	6.6	124	0.9	133
BXEM-65C-12H-6C-00-0-0	6500	70	150	5.8	6.2	6.6	153	0.9	165
BXEM-65C-12H-6CA-00-0-0	6500	70	150	5.8	6.2	6.6	153	0.9	165
BXEM-65E-12H-6C-00-0-0	6500	80	150	5.8	6.2	6.6	141	0.9	152
BXEM-65G-12H-6C-00-0-0	6500	90	150	5.8	6.2	6.6	123	0.9	132

Product Selection Guide

The following product configurations are available:

Table 2: Selection Guide, Pulsed Measurement Data at 150mA ($T_j = T_{sp} = 85^\circ\text{C}$)

Part Number ^{1,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical Pulsed Flux (lm) ^{4,5}	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXEM-18C-12H-6C-00-0-0	1800	70	150	5.6	6.0	6.3	97	0.9	108
BXEM-20G-12H-6C-00-0-0	2000	90	150	5.6	6.0	6.3	90	0.9	100
BXEM-22C-12H-6C-00-0-0	2200	70	150	5.6	6.0	6.3	113	0.9	126
BXEM-22E-12H-6C-00-0-0	2200	80	150	5.6	6.0	6.3	102	0.9	113
BXEM-22G-12H-6C-00-0-0	2200	90	150	5.8	6.0	6.6	90	0.9	100
BXEM-25G-12H-6C-00-0-0	2500	90	150	5.8	6.0	6.6	95.4	0.9	106
BXEM-27C-12H-6C-00-0-0	2700	70	150	5.6	6.0	6.3	129	0.9	143
BXEM-27E-12H-6C-00-0-0	2700	80	150	5.6	6.0	6.3	119	0.9	132
BXEM-27G-12H-6C-00-0-0	2700	90	150	5.6	6.0	6.3	100	0.9	111
BXEM-30C-12H-6C-00-0-0	3000	70	150	5.6	6.0	6.3	134	0.9	149
BXEM-30E-12H-6C-00-0-0	3000	80	150	5.6	6.0	6.3	122	0.9	136
BXEM-30G-12H-6C-00-0-0	3000	90	150	5.6	6.0	6.3	104	0.9	116
BXEM-30G-12H-6CA-00-0-0	3000	90	150	5.6	6.0	6.3	99	0.9	110
BXEM-35C-12H-6C-00-0-0	3500	70	150	5.6	6.0	6.3	137	0.9	152
BXEM-35E-12H-6C-00-0-0	3500	80	150	5.6	6.0	6.3	126	0.9	140
BXEM-35G-12H-6C-00-0-0	3500	90	150	5.6	6.0	6.3	108	0.9	120
BXEM-40C-12H-6C-00-0-0	4000	70	150	5.6	6.0	6.3	141	0.9	157
BXEM-40E-12H-6C-00-0-0	4000	80	150	5.6	6.0	6.3	129	0.9	143
BXEM-40G-12H-6C-00-0-0	4000	90	150	5.6	6.0	6.3	111	0.9	123
BXEM-45C-12H-6C-00-0-0	4500	70	150	5.6	6.0	6.3	141	0.9	157
BXEM-45E-12H-6C-00-0-0	4500	80	150	5.6	6.0	6.3	129	0.9	143
BXEM-45G-12H-6C-00-0-0	4500	90	150	5.6	6.0	6.3	111	0.9	123
BXEM-50C-12H-6C-00-0-0	5000	70	150	5.6	6.0	6.3	141	0.9	157
BXEM-50E-12H-6C-00-0-0	5000	80	150	5.6	6.0	6.3	129	0.9	143
BXEM-50G-12H-6C-00-0-0	5000	90	150	5.6	6.0	6.3	111	0.9	123

Product Selection Guide

The following product configurations are available:

Table 2: Selection Guide, Pulsed Measurement Data at 150mA ($T_j = T_{sp} = 85^\circ\text{C}$)

Part Number ^{1,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical Pulsed Flux (lm) ^{4,5}	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXEM-57C-12H-6C-00-0-0	5700	70	150	5.6	6.0	6.3	139	0.9	154
BXEM-57E-12H-6C-00-0-0	5700	80	150	5.6	6.0	6.3	127	0.9	141
BXEM-57G-12H-6C-00-0-0	5700	90	150	5.6	6.0	6.3	111	0.9	123
BXEM-65C-12H-6C-00-0-0	6500	70	150	5.6	6.0	6.3	137	0.9	152
BXEM-65C-12H-6CA-00-0-0	6500	70	150	5.6	6.0	6.3	137	0.9	152
BXEM-65E-12H-6C-00-0-0	6500	80	150	5.6	6.0	6.3	126	0.9	140
BXEM-65G-12H-6C-00-0-0	6500	90	150	5.6	6.0	6.3	110	0.9	122

Notes for Table 1&2 :

- The last 6 characters (including hyphens '-') refer to flux bins, forward voltage bins, and color bin options, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and color bin.
Example: BXEM-50E-12H-6C-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 5000K 6-step ANSI standard chromaticity region with a typical of 80CRI, 1x2 die configuration, high power, 6.2V typical forward voltage.
- Product CCT is not targeted at $T_{sp} = 85^\circ\text{C}$. Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are typical values.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current.
- Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous flux measurements, $\pm 0.15\text{V}$ tolerance on forward voltage measurements, and ± 2 tolerance on CRI measurements for the SMD 3030.
- Refer to Table 4 and Table 5 for Bridgelux SMD 3030 Luminous Flux Binning and Forward Voltage Binning information.
- Typical pulsed test performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under pulsed current with LED emitter mounted onto a heat sink with thermal interface material and the solder point temperature maintained at 25°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

Electrical Characteristics

Table 3: Electrical Characteristics

Part Number ¹	Drive Current (mA)	Forward Voltage (V) ^{2,3}			Typical Temperature Coefficient of Forward Voltage $\Delta V_f / \Delta T$ (mV/°C)	Typical Thermal Resistance Junction to Solder Point ⁴ R_{j-sp} (°C/W)
		Minimum	Typical	Maximum		
BXEM-XXX-12H-6C-00-0-0	150	5.8	6.2	6.6	-2.0 to -4.0	12

Notes for Table 3:

1. The last 6 characters (including hyphens '-') refer to flux bins, forward voltage bins, and color bin options, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 6 SDCM color.
Example: BXEM-50E-12H-6C-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 5000K 6-step ANSI standard chromaticity region with a typical of 80CRI, 1x2 die configuration, high power, 6.2V typical forward voltage.
2. Bridgelux maintains a tolerance of $\pm 0.1V$ on forward voltage measurements. Voltage minimum and maximum values at the nominal drive current are guaranteed by 100% test.
3. Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_{sp} = 25^{\circ}C$.
4. Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power.

Absolute Maximum Ratings

Table 4: Maximum Ratings

Parameter	Maximum Rating
LED Junction Temperature (T_j)	125°C
Storage Temperature	-40°C to +105°C
Operating Solder Point Temperature (T_{sp})	-40°C to +105°C
Soldering Temperature	260°C or lower for a maximum of 10 seconds
Maximum Drive Current	240mA
Maximum Peak Pulsed Forward Current ¹	480mA
Maximum Reverse Voltage ²	-
Moisture Sensitivity Rating	MSL 3
Electrostatic Discharge	2kV HBM. JEDEC-JS-001-HBM and JEDEC-JS-001-2012

Notes for Table 4:

1. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 10 ms when operating LED SMD at maximum peak pulsed current specified. Maximum peak pulsed current indicate values where LED SMD can be driven without catastrophic failures.
2. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. no rating is provided

Product Bin Definitions

Table 5 lists the standard photometric luminous flux bins for Bridgelux SMD 3030 LEDs. Although several bins are listed, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

Table 5: Luminous flux Bin Definitions at 150mA, $T_{sp}=25^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
09	90	100	lm	$I_F=150\text{mA}$
10	100	110		
11	110	120		
12	120	130		
13	130	140		
34	135	140		
14	140	150		
45	145	150		
15	150	160		
16	160	170		

Note for Table 5:

1. Bridgelux maintains a tolerance of $\pm 7.5\%$ on luminous flux measurements.

Table 6: Forward Voltage Bin Definition at 150mA, $T_{sp}=25^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
P	5.8	6.0	V	$I_F=150\text{mA}$
Q	6.0	6.2		
R	6.2	6.4		
S	6.4	6.6		

Note for Table 6:

1. Bridgelux maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

Product Bin Definitions

Table 7: 1800K 3- and 5-step MacAdam Ellipse Color Bin Definitions

CCT	Color Space	Center Point		Major Axis	Minor Axis	Ellipse Rotation Angle	Color Bin
		X	Y				
1800K	3 SDCM	0.5458	0.4092	0.0099	0.0048	10	3
	5 SDCM	0.5458	0.4092	0.0165	0.0080	10	5
BXEM-65C-12H-6CA ($T_{sp}=25^{\circ}\text{C}$)	3 SDCM	0.3109	0.3256	0.00669	0.00285	58.57	1
	5 SDCM	0.3109	0.3256	0.01115	0.00475	58.57	1/A/B/C/D

Table 8: 2000K Color Bin Definitions

CCT	Color Bin A		Color Bin 1		Color Bin B	
	X	Y	X	Y	X	Y
2000K ($T_{sp}=25^{\circ}\text{C}$)	0.5208	0.4058	0.543	0.4117	0.5513	0.414
	0.5170	0.4199	0.5392	0.4258	0.5476	0.428
	0.5087	0.4176	0.517	0.4199	0.5392	0.4258
	0.5124	0.4035	0.5208	0.4058	0.543	0.4117
	0.5208	0.4058	0.543	0.4117	0.5513	0.414

Product Bin Definitions

Table 9: 3- and 6-step MacAdam Ellipse Color Bin Definitions

CCT	Color Space	Center Point		Major Axis	Minor Axis	Ellipse Rotation Angle	Color Bin
		X	Y				
2200K	3 SDCM	0.5018	0.4153	0.00863	0.00398	49.27	1
	6 SDCM	0.5018	0.4153	0.01726	0.00796	49.27	1/A/B/C/D
2500K ($T_{sp}=25^{\circ}\text{C}$)	3 SDCM	0.4820	0.4225	0.00810	0.00420	53.70	1
	6 SDCM	0.4820	0.4225	0.01620	0.0084	53.70	1/A/B/C/D
2700K	3 SDCM	0.4578	0.4101	0.0081	0.0042	53.7	1
	6 SDCM	0.4578	0.4101	0.0162	0.0084	53.7	1/A/B/C/D
3000K	3 SDCM	0.4338	0.4030	0.0083	0.0041	53.2	1
	6 SDCM	0.4338	0.4030	0.0167	0.0082	53.2	1/A/B/C/D
BXEM-30G-12H-6CA ($T_{sp}=25^{\circ}\text{C}$)	3 SDCM	0.4320	0.3980	0.0083	0.0041	53.2	1
	6 SDCM	0.4320	0.3980	0.0167	0.0082	53.2	1/A/B/C/D
3500K	3 SDCM	0.4073	0.3917	0.0094	0.0040	54.0	1
	6 SDCM	0.4073	0.3917	0.0185	0.0083	54.0	1/A/B/C/D
4000K	3 SDCM	0.3818	0.3797	0.0094	0.0040	53.7	1
	6 SDCM	0.3818	0.3797	0.0188	0.0080	53.7	1/A/B/C/D
4500K	3 SDCM	0.3611	0.3658	0.0094	0.0040	53.0	1
	6 SDCM	0.3611	0.3658	0.0188	0.0080	53.0	1/A/B/C/D
5000K	3 SDCM	0.3447	0.3553	0.0082	0.0035	59.6	1
	6 SDCM	0.3447	0.3553	0.0164	0.0071	59.6	1/A/B/C/D
5700K	3 SDCM	0.3287	0.3417	0.00746	0.00320	59.1	1
	6 SDCM	0.3287	0.3417	0.01492	0.0064	59.1	1/A/B/C/D
6500K	3 SDCM	0.3123	0.3282	0.00669	0.00285	58.57	1
	6 SDCM	0.3123	0.3282	0.01338	0.0057	58.57	1/A/B/C/D









Notes for Table 7:

1. Color binning at $T_{sp}=85^{\circ}\text{C}$ unless otherwise specified
2. Bridgelux maintains a tolerance of ± 0.007 on x and y color coordinates in the CIE 1931 color space.







Product Bin Definitions

Figure 1: C.I.E. 1931 Chromaticity Diagram (5 Color Bin Structure, Hot-color Targeted at $T_{sp}=85^{\circ}\text{C}$)

2000K,2500K,BXEM-30G-12H-6CA ,BXEM-65C-12H-6CA $T_{sp}=25^{\circ}\text{C}$

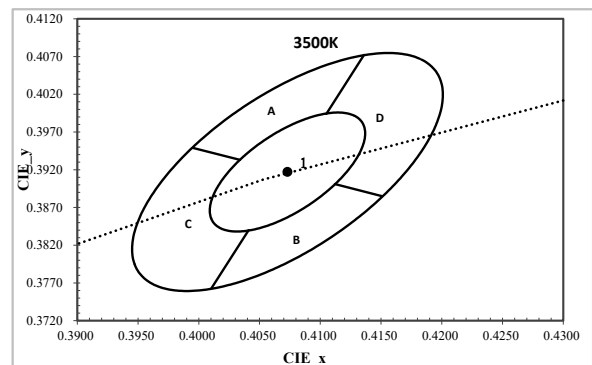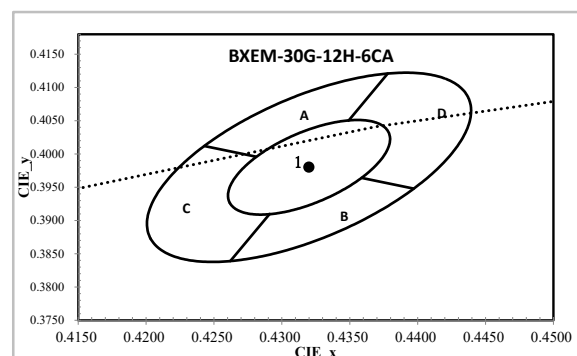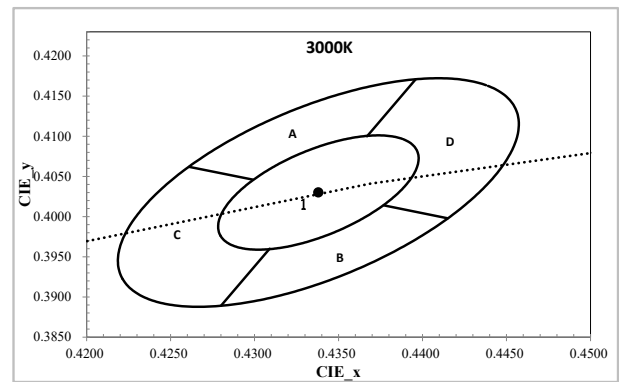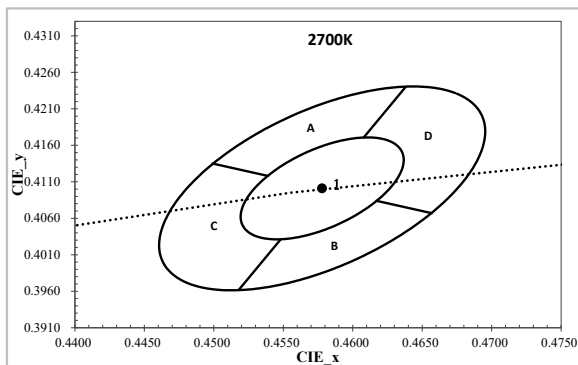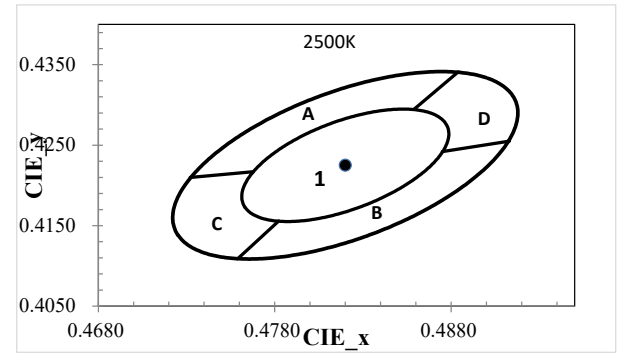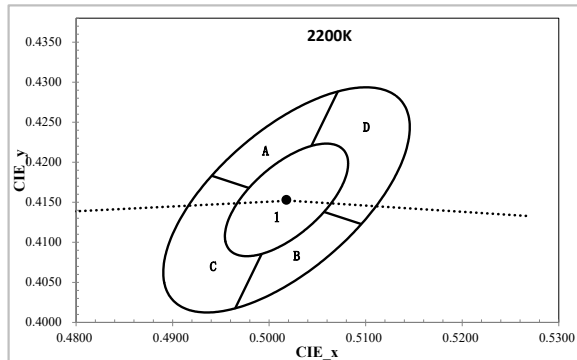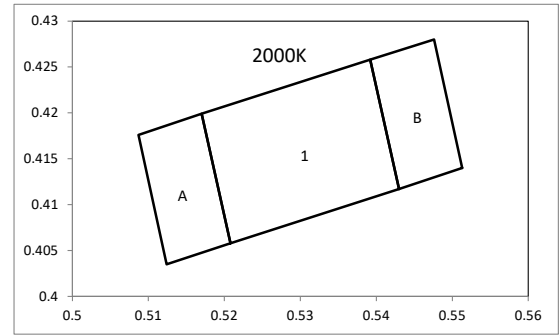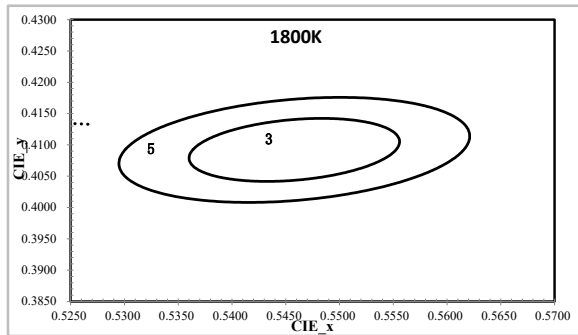

Product Bin Definitions

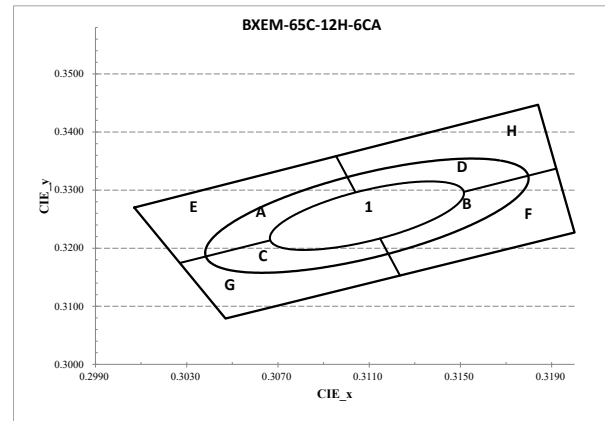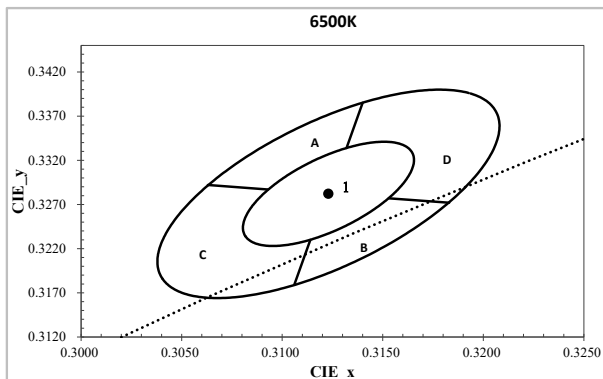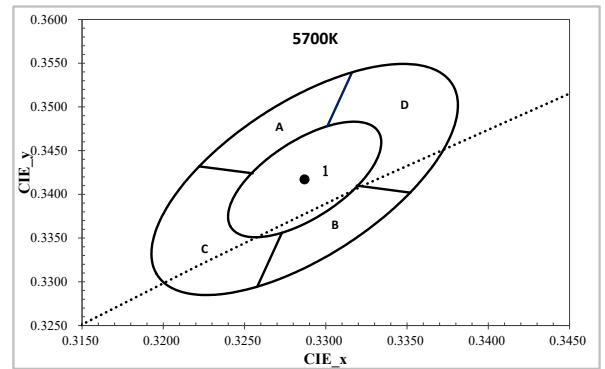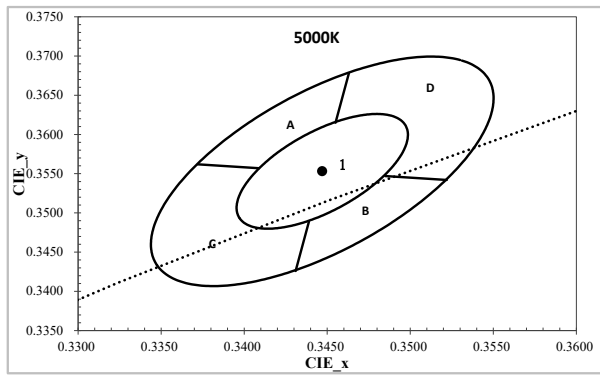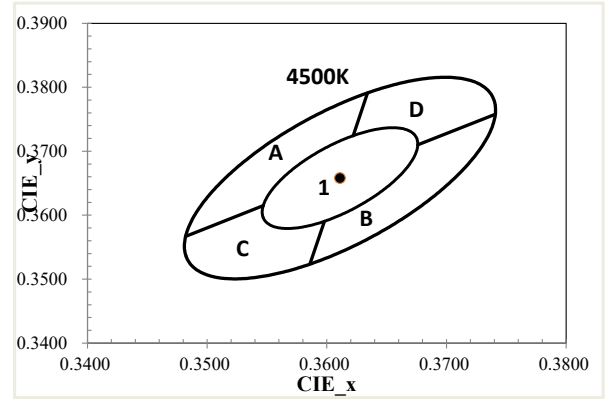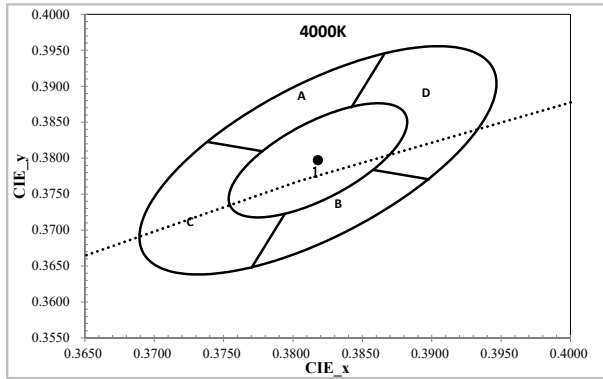

Performance Curves

Figure 2: Drive Current vs. Voltage ($T_{sp}=25^{\circ}\text{C}$)


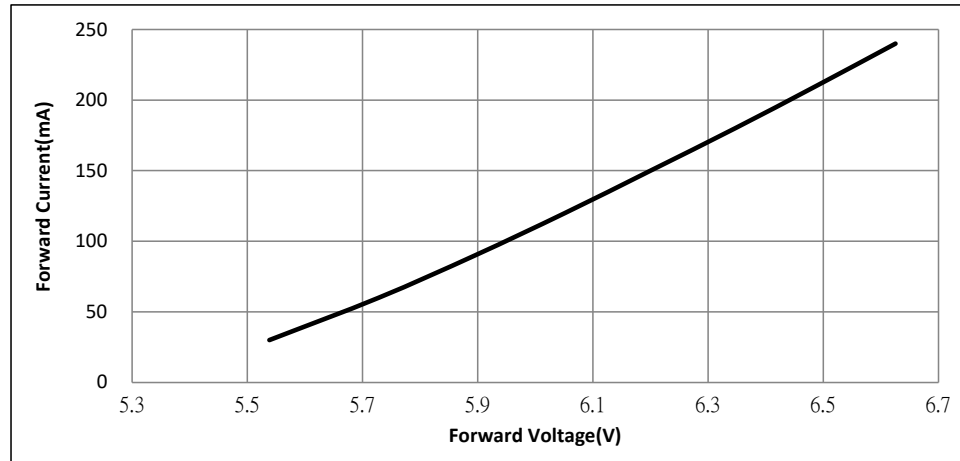


Figure 3: Relative Luminous Flux vs. Drive Current¹ ($T_{sp}=25^{\circ}\text{C}$)

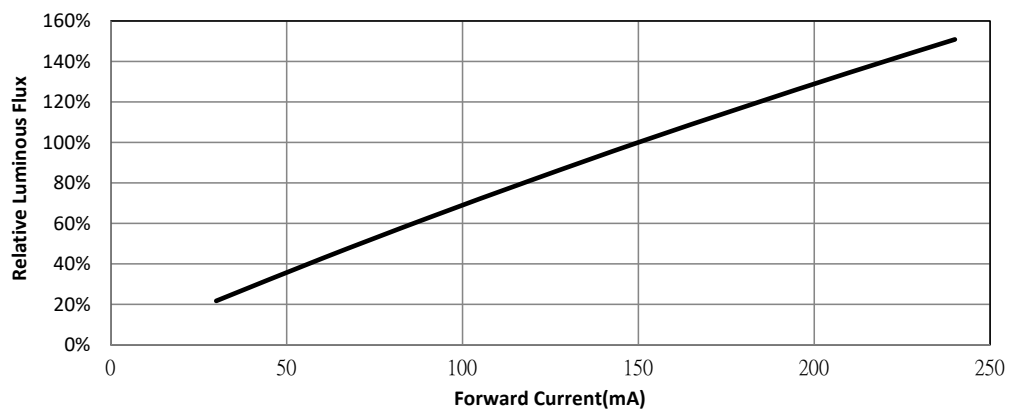

Note for Figure 3:

1. Pulse width modulation (PWM) is recommended for dimming effects.

Performance Curves

Figure 4: Relative Flux vs. Solder Point Temperature


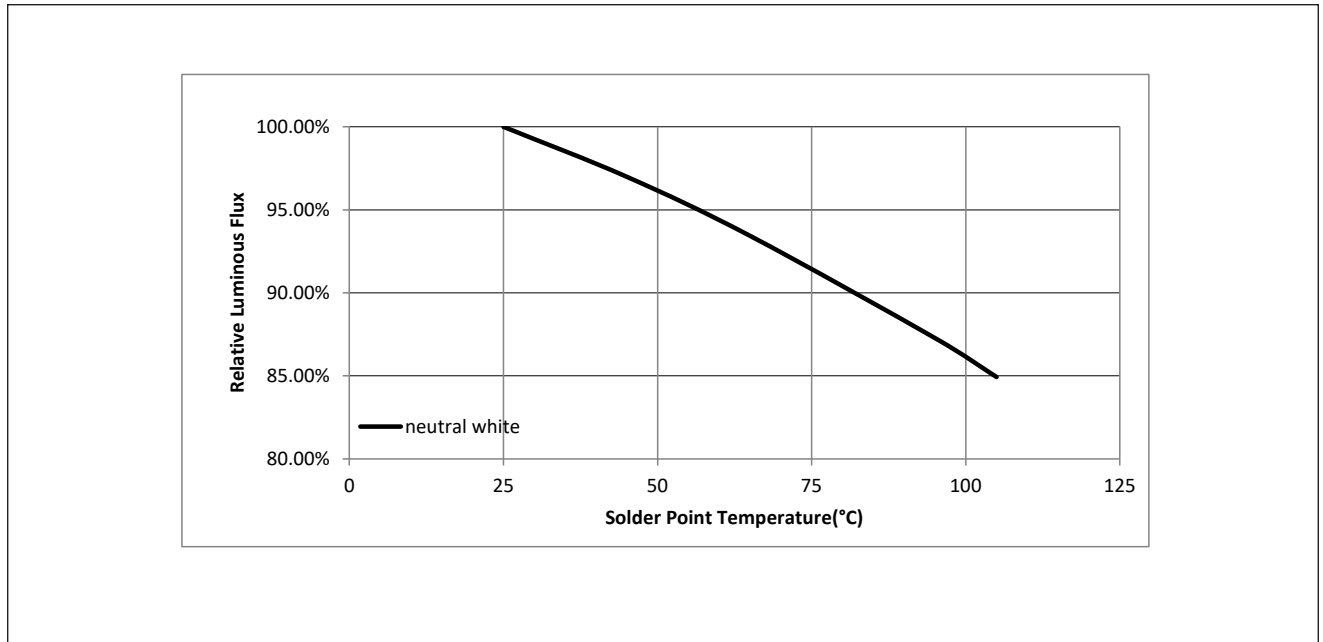


Figure 5: Typical ccx Shift vs. Solder Point Temperature

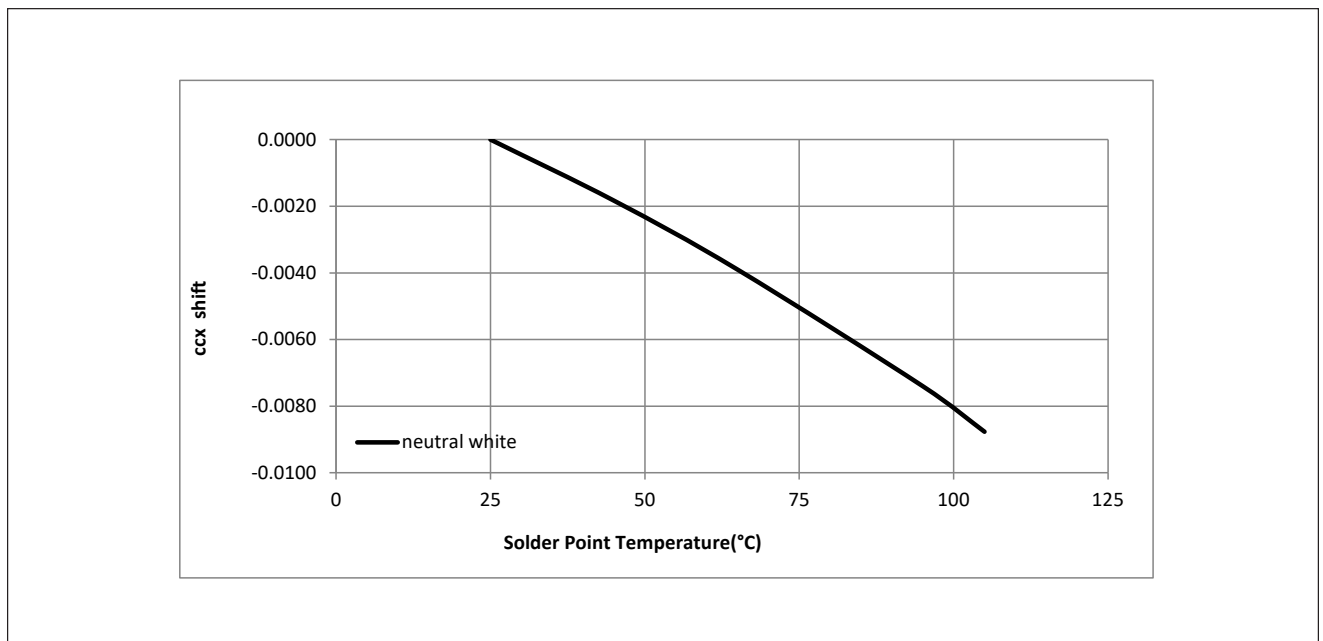


Notes for Figures 4 & 5:

1. Characteristics shown for neutral white based on 4000K and 80 CRI.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Performance Curves

Figure 6: Typical ccy Shift vs. Solder Point Temperature

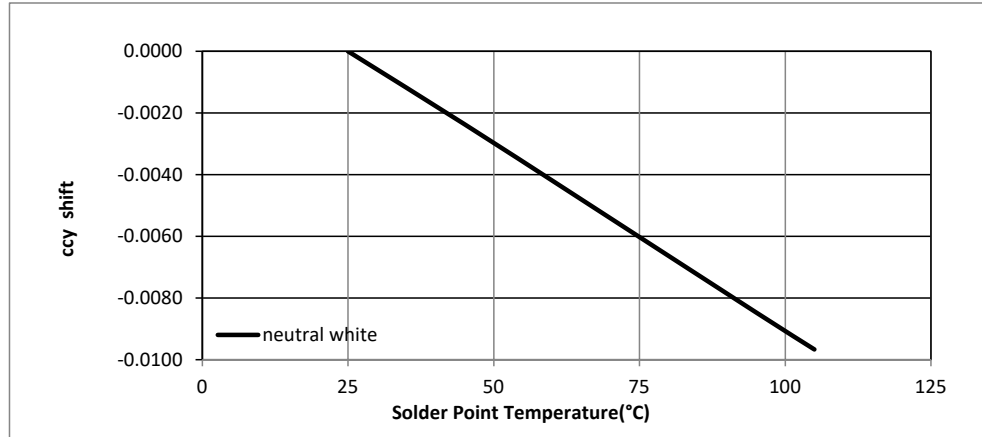


Notes for Figure 6:

1. Characteristics shown for neutral white based on 4000K and 80 CRI.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Typical Radiation Pattern


Figure 7: Typical Spatial Radiation Pattern at 150mA, $T_{sp}=25^{\circ}\text{C}$

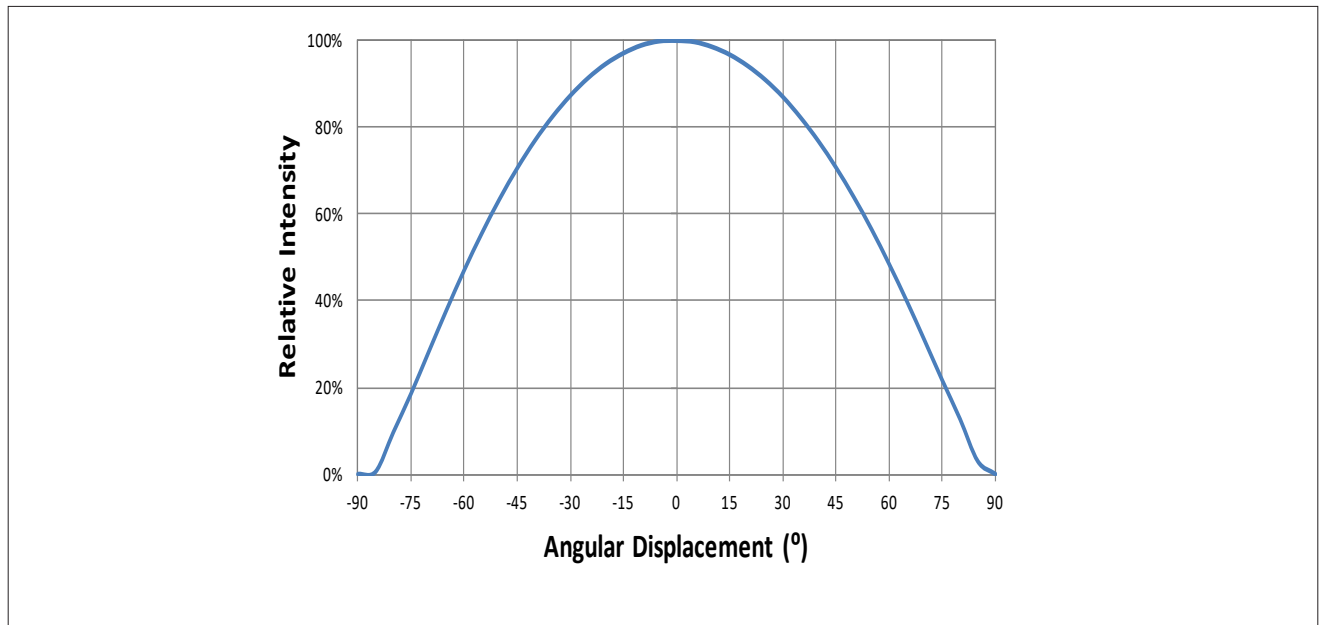

Notes for Figure 7:


1. Typical viewing angle is 120° .
2. The viewing angle is defined as the off axis angle from the centerline where luminous intensity (Iv) is $\frac{1}{2}$ of the peak value.

Figure 8: Typical Polar Radiation Pattern at 150mA, $T_{sp}=25^{\circ}\text{C}$

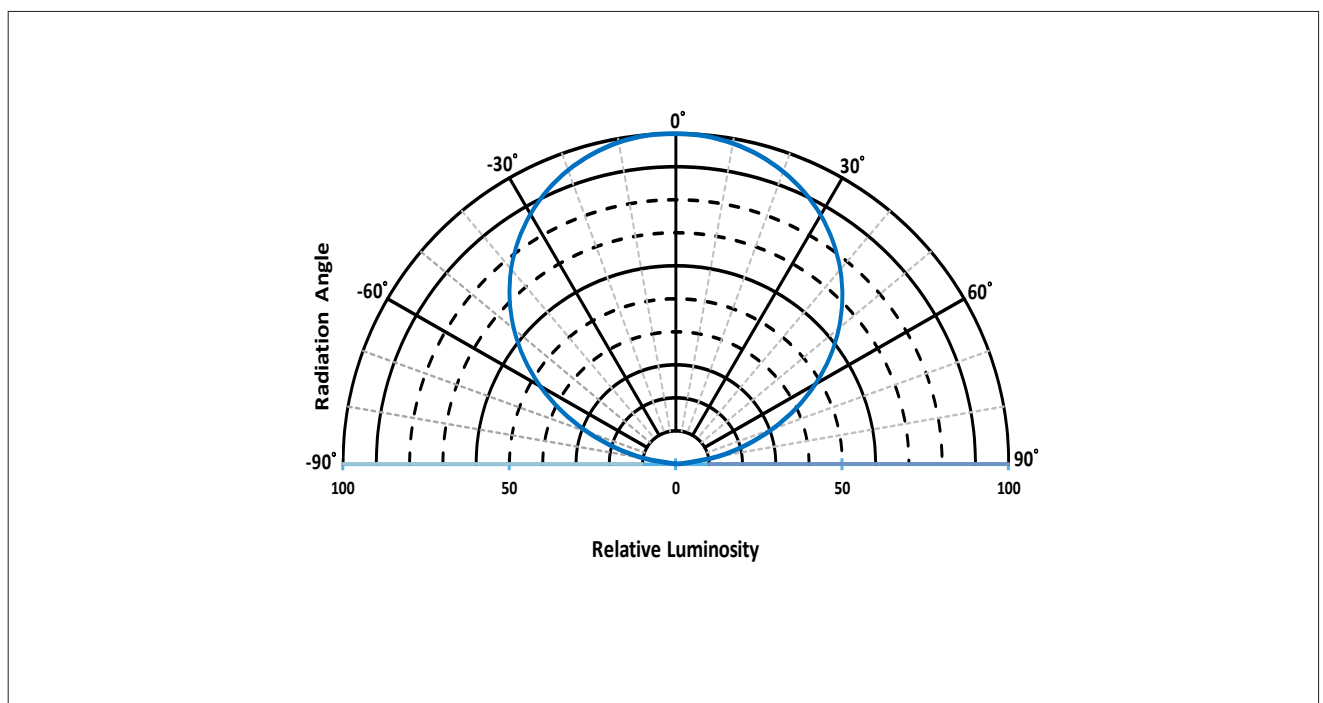

Typical Color Spectrum

Figure 9: Typical Color Spectrum

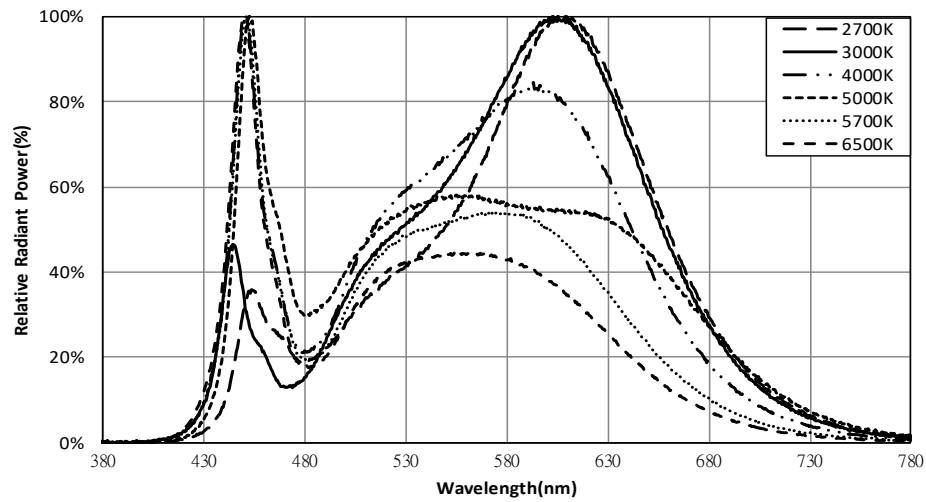


Notes for Figure 9:

1. Color spectra measured at nominal current for $T_{sp} = 25^{\circ}\text{C}$
2. Color spectra shown for 80 CRI products.

Mechanical Dimensions


Figure 10: Drawing for SMD 3030

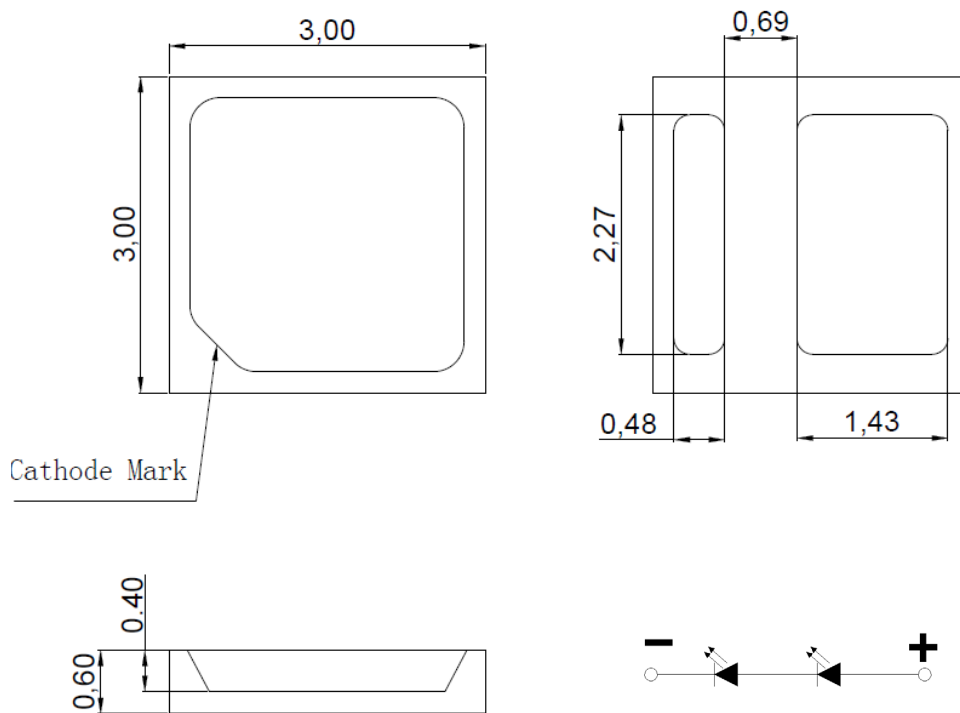

Notes for Figure 10:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are $\pm 0.10\text{mm}$.

Recommended PCB Soldering Pad Pattern

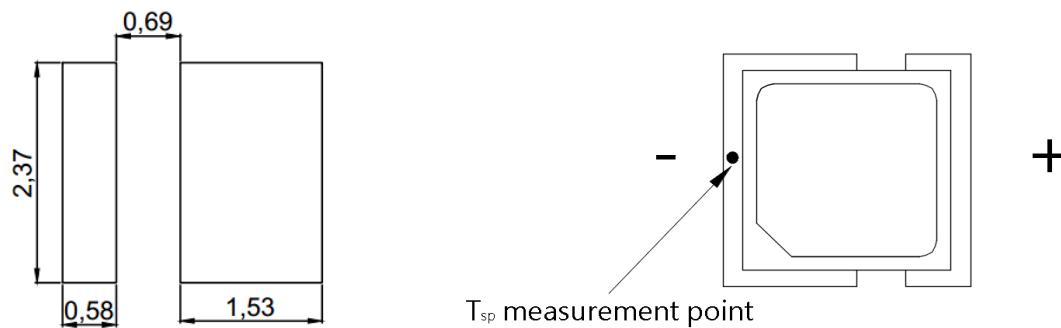

Reliability

Table 10: Reliability Test Items and Conditions

No .	Items	Reference Standard	Test Conditions	Drive Current	Test Duration	Units Failed/Tested
1	Moisture/Reflow Sensitivity	J-STD-020E	$T_{sld} = 260^{\circ}\text{C}$, 10sec, Precondition: 30°C , 60%RH, 168hr	-	3 reflows	0/20
2	Low Temperature Storage	JESD22-A119	$T_a = -40^{\circ}\text{C}$	-	1000 hours	0/20
3	High Temperature Storage	JESD22-A103D	$T_a = 100^{\circ}\text{C}$	-	1000 hours	0/20
4	Low Temperature Operating Life	JESD22-A108D	$T_a = -40^{\circ}\text{C}$	150mA	1000 hours	0/20
5	Temperature Humidity Operating Life	JESD22-A101C	$T_{sp} = 85^{\circ}\text{C}$, RH=85%	150mA	1000 hours	0/20
6	High Temperature Operating Life	JESD22-A108D	$T_{sp} = 105^{\circ}\text{C}$	240mA	1000 hours	0/20
7	Thermal Shock	JESD22-A106B	$T_a = -40^{\circ}\text{C} \sim 100^{\circ}\text{C}$; Dwell : 15min; Transfer: 10sec	-	200 cycles	0/20
8	Temperature Cycle	JESD22-A104E	$T_a = -40^{\circ}\text{C} \sim 100^{\circ}\text{C}$; Dwell at extreme temperature: 15min; Ramp rate $< 105^{\circ}\text{C}/\text{min}$	-	200 cycles	0/20
9	Electrostatic Discharge	JS-001-2012	HBM, 2kV, 15k Ω , 100pF, Alternately positive or negative	-	-	0/20

Passing Criteria


Item	Symbol	Test Condition	Passing Criteria
Forward Voltage	Vf	150mA	$\Delta Vf < 10\%$
Luminous Flux	Fv	150mA	$\Delta Fv < 30\%$
Chromaticity Coordinates	(x, y)	150mA	$\Delta u'v' < 0.007$

Notes for Table 10:

- Measurements are performed after allowing the LEDs to return to room temperature
- T_{sld} : reflow soldering temperature; T_a : ambient temperature


Reflow Characteristics

Figure 11 : Reflow Profile

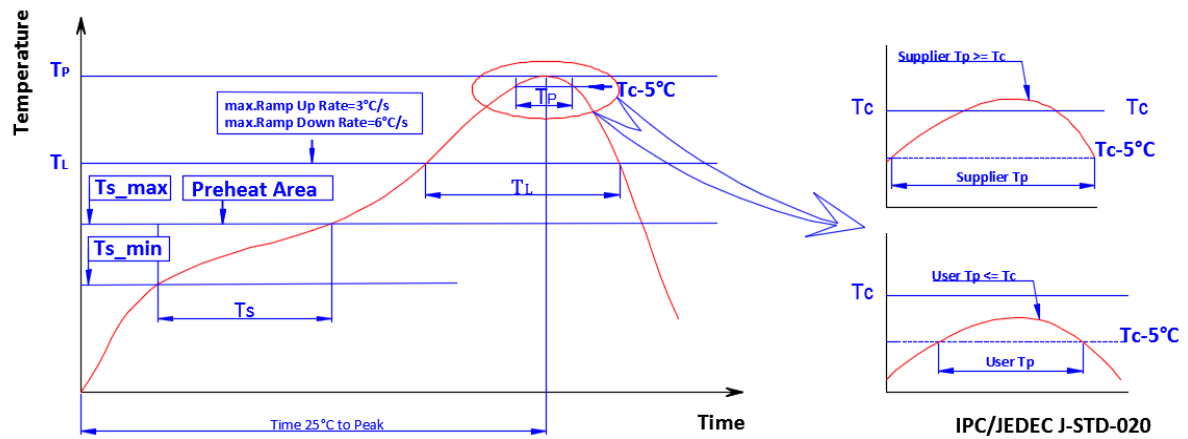

Profile Feature	Lead Free Assembly
Temperature Min. (Ts_min)	160°C
Temperature Max. (Ts_max)	205°C
Time (ts) from Ts_min to Ts_max	60-150 seconds
Ramp-Up Rate (TL to Tp)	3 °C/second
Liquidus Temperature (TL)	220 °C
Time (TL) Maintained Above TL	60-150 seconds
Peak Temp(Tp)	260 °C max.
Time (Tp) Within 5 °C of the Specified Classification Temperature (Tc)	25 seconds max.
Ramp-Down Rate (Tp to TL)	5 °C/second max.
Time 25 °C to Peak Temperature	10 minutes max.

Figure 12 : Pick and Place

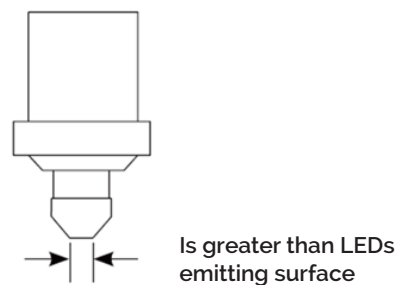


Note for Figure 12:

1. When using a pick and place machine, choose a nozzle that has a larger diameter than the LED's emitting surface. Using a Pick-and-Place nozzle with a smaller diameter than the size of the LEDs emitting surface will cause damage and may also cause the LED to not illuminate.

Packaging


Figure 13: Emitter Reel Drawings

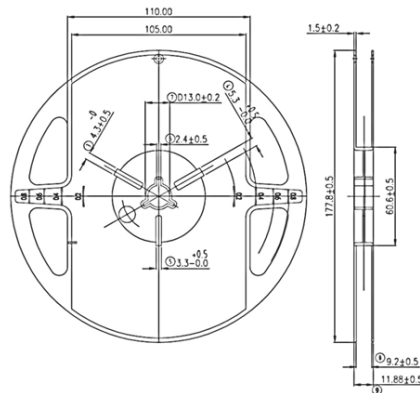

Note for Figure 13:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Figure 14: Emitter Tape Drawings

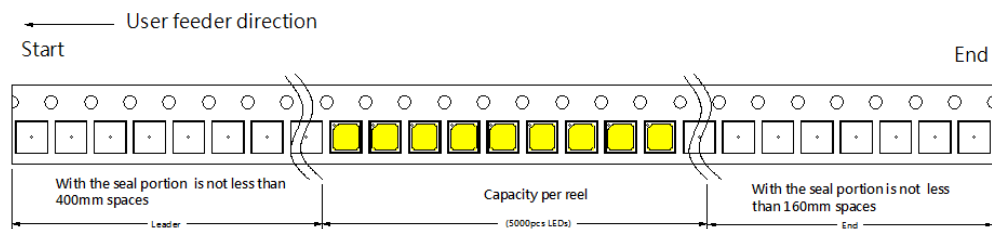


Note for Figure 14:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Packaging

Figure 15: Emitter Reel Packaging Drawings

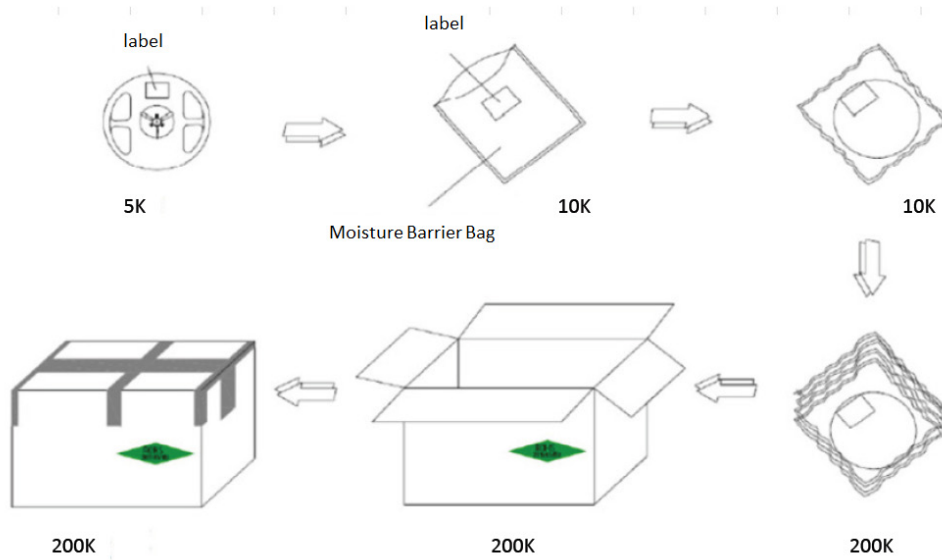

Note for Figure 15:

1. Drawings are not to scale.

Design Resources

Please contact your Bridgelux sales representative for assistance.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED emitter. Please consult Bridgelux Application Note AN51 for additional information.

CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux SMD LED emitter is in accordance with IEC specification EN62471: Photobiological Safety of Lamps and Lamp Systems. SMD LED emitters are classified RG,2 when operated at or below the maximum drive current. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

CAUTION: RISK OF BURN

Do not touch the SMD LED emitter during operation. Allow the emitter to cool for a sufficient period of time before handling. The SMD LED emitter may reach elevated temperatures such that could burn skin when touched.

CAUTION

CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the emitter or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the emitter

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area).

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, LED emitter testing is performed at the nominal drive current.

About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
youtube.com/user/Bridgelux
WeChat ID: BridgeluxInChina
https://www.linkedin.com/company/bridgelux-inc-_2



46410 Fremont Boulevard
Fremont, CA 94538 USA
Tel (925) 583-8400
Fax (925) 583-8401
www.bridgelux.com

© 2024 Bridgelux, Inc. All rights reserved 2024. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.