



Bridgelux® Gen 7 Vero® 13 Array

Product Data Sheet DSg1



Introduction

Vero® Series



Vero® Series is a revolutionary advancement in chip on board (COB) light source technology and innovation. Vero LED light sources simplify luminaire design and manufacturing processes. Vero Chip on Board (COB) LED arrays are available in four LES configurations, engineered to enable new degrees of flexibility and reliability over a broad range of electrical currents. Vero arrays deliver increased lumen density to enable improved beam control and precision lighting with 2 and 3 SDCM color control standard for clean and consistent uniform lighting.

Vero products include an onboard connector port that enables a solder-free electrical interconnect, and simple mounting features for plug-and-play installation.

Bridgelux Décor Series™ is our state-of-the-art color line designed specifically for premium applications, producing unmatched LED light quality with brilliant color-rendering options and pleasing lighting palettes. Bridgelux Décor Series color points are available on Vero® SE Series, Vero® Series, V Series™ and V Series™ HD.

Décor Series™ Class A is based on human response testing, providing color points with a combined GAI and CRI metric.

Décor Series™ Ultra products provide a high CRI of 97 and minimum R_g value of 93, which emphasizes the reds and color tones to which the human eye is most receptive - perfect for the most luxurious retail shops and world renowned museums. Décor Series Ultra is also designed as a replacement for halogen lamps.

Décor Series™ Showcase is the optimal solution for replacing ceramic metal halide lamps, incorporating the same pure white light with enhanced spectrum coverage and higher efficacy.

Features

- Efficacy of 170 lm/W typical
- Lumen output performance ranges from 460 to 7,300 lumens
- Broad range of CCT options from 2700K to 6500K
- CRI options include: minimum 70, 80, and 90
- 2 and 3 SDCM color control for 2700K-4000K CCT
- Reliable operation at up to 2X nominal drive current
- Radial die pattern and improved lumen density
- Thermally isolated solder pads
- Onboard connector port
- Top side part number markings
- V_f bin code backside marking

Benefits

- Broad application coverage for interior and exterior lighting
- Flexibility for application driven lighting design requirements
- High quality true color reproduction
- Uniform consistent white light
- Flexibility in design optimization
- Enhanced ease of use and assembly
- Solderless connectivity enables plug & play installation and field upgradability
- Improved inventory management and quality control


Contents

Product Feature Map	2
Product Nomenclature	2
Product Selection Guide	3
Performance at Commonly Used Drive Currents	10
Electrical Characteristics	19
Eye Safety	20
Absolute Maximum Ratings	21
Performance Curves	22
Typical Radiation Pattern	25
Typical Color Spectrum	26
Mechanical Dimensions	27
Color Binning Information	28
Packaging and Labeling	29
Design Resources	31
Precautions	31
Disclaimers	31
About Bridgelux	32

Product Feature Map


Vero 13 is the second smallest form factor in the Vero family of the next generation solid state light sources. In addition to delivering the performance and light quality required for many lighting applications, Vero incorporates

several features to simplify the design integration and manufacturing process, accelerate time to market and reduce system costs. Please visit www.bridgelux.com for more information on the Vero Series family of products.

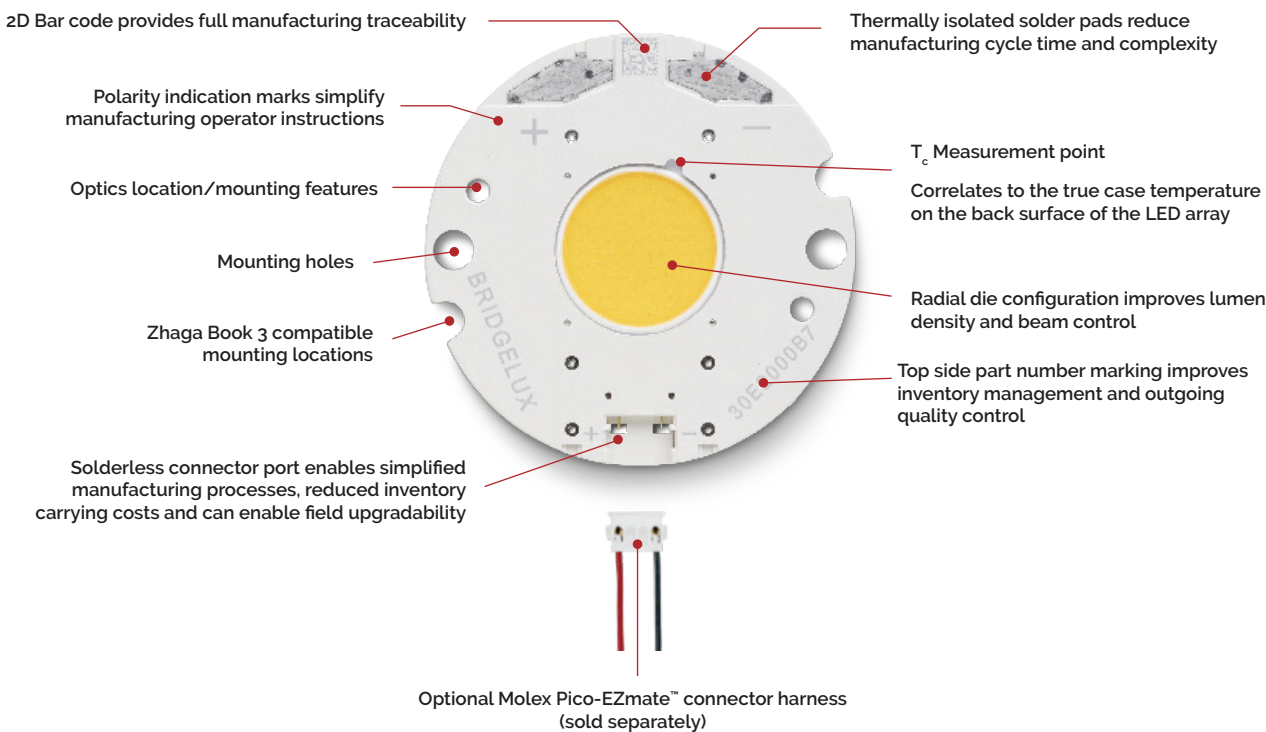

Product Nomenclature

The part number designation for Bridgelux Vero LED arrays is explained as follows:

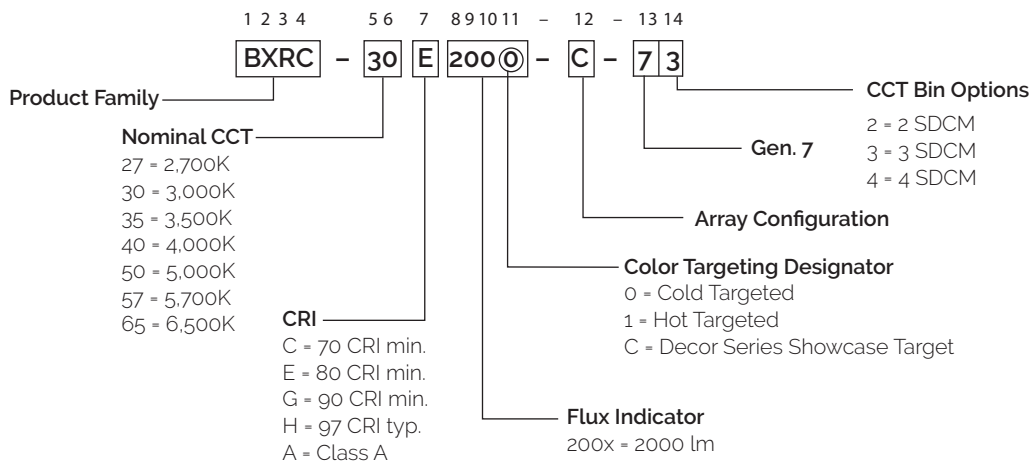

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data ($T_j = T_c = 25^\circ\text{C}$)

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical Pulsed Flux ^{4,5,6} $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux ^{6,7} $T_c = 25^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-27E2000-B-7x	2700	80	450	2506	2255	34.8	15.7	160
BXRC-27E2000-C-7x	2700	80	630	3508	3157	34.8	21.9	160
BXRC-27E2000-D-7x	2700	80	500	2544	2290	31.8	15.9	160
BXRC-27G20H0-B-7x	2700	90	450	2145	1931	34.8	15.7	137
BXRC-27G20H0-C-7x	2700	90	630	3004	2703	34.8	21.9	137
BXRC-27G20H0-D-7x	2700	90	500	2178	1960	31.8	15.9	137
BXRC-27G2000-B-7x	2700	90	450	2067	1860	34.8	15.7	132
BXRC-27G2000-C-7x	2700	90	630	2894	2605	34.8	21.9	132
BXRC-27G2000-D-7x	2700	90	500	2099	1889	31.8	15.9	132
BXRC-27H2000-B-7x	2700	97	450	1832	1649	34.8	15.7	117
BXRC-27H2000-C-7x	2700	97	630	2565	2309	34.8	21.9	117
BXRC-27H2000-D-7x	2700	97	500	1860	1674	31.8	15.9	117
BXRC-30C2001-B-74	3000	70	450	2787	2509	34.8	15.7	178
BXRC-30C2001-C-74	3000	70	630	3902	3512	34.8	21.9	178
BXRC-30C2001-D-74	3000	70	500	2830	2547	31.8	15.9	178
BXRC-30E2000-B-7x	3000	80	450	2662	2396	34.8	15.7	170
BXRC-30E2000-C-7x	3000	80	630	3727	3354	34.8	21.9	170
BXRC-30E2000-D-7x	3000	80	500	2703	2433	31.8	15.9	170
BXRC-30G20H0-B-7x	3000	90	450	2255	2030	34.8	15.7	144
BXRC-30G20H0-C-7x	3000	90	630	3157	2841	34.8	21.9	144
BXRC-30G20H0-D-7x	3000	90	500	2290	2061	31.8	15.9	144
BXRC-30G2000-B-7x	3000	90	450	2161	1945	34.8	15.7	138
BXRC-30G2000-C-7x	3000	90	630	3026	2723	34.8	21.9	138
BXRC-30G2000-D-7x	3000	90	500	2194	1975	31.8	15.9	138
BXRC-30G200C-B-73	3000	90	450	2095	1885	35.0	15.8	133
BXRC-30G200C-D-73	3000	90	500	2115	1903	31.8	15.9	133
BXRC-30H2000-B-7x	3000	97	450	1958	1762	34.8	15.7	125
BXRC-30H2000-C-7x	3000	97	630	2741	2466	34.8	21.9	125
BXRC-30H2000-D-7x	3000	97	500	1988	1789	31.8	15.9	125
BXRC-30A2001-B-73 ^{8,9}	3000	93	450	1942	1748	34.8	15.7	124
BXRC-30A2001-C-73 ^{8,9}	3000	93	630	2719	2447	34.8	21.9	124
BXRC-30A2001-D-73 ^{8,9}	3000	93	500	1972	1774	31.8	15.9	124

Notes for Table 1:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are not targeted to $T_c = 85^\circ\text{C}$.
- CRI values are typical for Decor Series Ultra, Decor Series Street and Landmark and Decor Series Class A products. CRI values are minimums for all other products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, the minimum Rg value for 97 CRI products is 93. Bridgelux maintains a ± 3 tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Products tested under pulsed condition (10ms pulse width) at nominal test current where T_j (junction temperature) - T_c (case temperature) = 25°C .
- Typical performance values are provided as a reference only and are not a guarantee of performance.
- Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
- Minimum flux values at the nominal test current are guaranteed by 100% test.
- Nominal CCT is defined by the Lighting Research Center's Class A definition. The center of the Class A color bin is on the corresponding isothermal line.
- GAI value is 80. To help ensure optimal fixture level performance, GAI is measured at the fixture level, on axis, at a case temperature of 70°C . GAI may vary depending on fixture design and performance.

Product Selection Guide

Table 1: Selection Guide, Pulsed Measurement Data ($T_j = T_c = 25^\circ\text{C}$) (continued)

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical Pulsed Flux ^{4,5,6} $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux ^{6,7} $T_c = 25^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-35E2000-B-7x	3500	80	450	2725	2452	34.8	15.7	174
BXRC-35E2000-C-7x	3500	80	630	3815	3433	34.8	21.9	174
BXRC-35E2000-D-7x	3500	80	500	2767	2490	31.8	15.9	174
BXRC-35G2000-B-7x	3500	90	450	2239	2015	34.8	15.7	143
BXRC-35G2000-C-7x	3500	90	630	3135	2822	34.8	21.9	143
BXRC-35G2000-D-7x	3500	90	500	2274	2046	31.8	15.9	143
BXRC-35A2001-B-73 ^{8,9}	3500	93	450	2067	1860	34.8	15.7	132
BXRC-35A2001-C-73 ^{8,9}	3500	93	630	2894	2605	34.8	21.9	132
BXRC-35A2001-D-73 ^{8,9}	3500	93	500	2099	1889	31.8	15.9	132
BXRC-40C2001-B-74	4000	70	450	2866	2579	34.8	15.7	183
BXRC-40C2001-C-74	4000	70	630	4012	3611	34.8	21.9	183
BXRC-40C2001-D-74	4000	70	500	2910	2619	31.8	15.9	183
BXRC-40E2000-B-7x	4000	80	450	2741	2466	34.8	15.7	175
BXRC-40E2000-C-7x	4000	80	630	3837	3453	34.8	21.9	175
BXRC-40E2000-D-7x	4000	80	500	2783	2504	31.8	15.9	175
BXRC-40G2000-B-7x	4000	90	450	2286	2058	34.8	15.7	146
BXRC-40G2000-C-7x	4000	90	630	3201	2881	34.8	21.9	146
BXRC-40G2000-D-7x	4000	90	500	2321	2089	31.8	15.9	146
BXRC-40H2000-B-73	4000	97	450	2067	1860	34.8	15.7	132
BXRC-40H2000-C-73	4000	97	630	2894	2605	34.8	21.9	132
BXRC-40H2000-D-73	4000	97	500	2099	1889	31.8	15.9	132
BXRC-40A2001-B-73 ^{8,9}	4000	93	450	2239	2015	34.8	15.7	143
BXRC-40A2001-C-73 ^{8,9}	4000	93	630	3135	2822	34.8	21.9	143
BXRC-40A2001-D-73 ^{8,9}	4000	93	500	2274	2046	31.8	15.9	143
BXRC-50C2001-B-7x	5000	70	450	2881	2593	34.8	15.7	184
BXRC-50C2001-C-7x	5000	70	630	4034	3631	34.8	21.9	184
BXRC-50C2001-D-7x	5000	70	500	2926	2633	31.8	15.9	184
BXRC-50E2001-B-7x	5000	80	450	2772	2495	34.8	15.7	177
BXRC-50E2001-C-7x	5000	80	630	3881	3492	34.8	21.9	177
BXRC-50E2001-D-7x	5000	80	500	2814	2533	31.8	15.9	177
BXRC-50G2001-B-7x	5000	90	450	2396	2156	34.8	15.7	153
BXRC-50G2001-C-7x	5000	90	630	3354	3019	34.8	21.9	153
BXRC-50G2001-D-7x	5000	90	500	2433	2189	31.8	15.9	153

Notes for Table 1:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are not targeted to $T_c = 85^\circ\text{C}$.
- CRI values are typical for Decor Series Ultra, Decor Series Street and Landmark and Decor Series Class A products. CRI values are minimums for all other products. Minimum R_g value for 80 CRI products is 0, the minimum R_g value for 90 CRI products is 50, the minimum R_g value for 97 CRI products is 93. Bridgelux maintains a ± 3 tolerance on CRI and R_g values.
- Drive current is referred to as nominal drive current.
- Products tested under pulsed condition (10ms pulse width) at nominal test current where T_j (junction temperature) = T_c (case temperature) = 25°C .
- Typical performance values are provided as a reference only and are not a guarantee of performance.
- Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
- Minimum flux values at the nominal test current are guaranteed by 100% test.
- Nominal CCT is defined by the Lighting Research Center's Class A definition. The center of the Class A color bin is on the corresponding isothermal line.
- GAI value is 80. To help ensure optimal fixture level performance, GAI is measured at the fixture level, on axis, at a case temperature of 70°C . GAI may vary depending on fixture design and performance.

Product Selection Guide

Table 1: Selection Guide, Pulsed Measurement Data ($T_j = T_c = 25^\circ\text{C}$) (continued)

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical Pulsed Flux ^{4,5,6} $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux ^{6,7} $T_c = 25^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-57C2001-B-7x	5700	70	450	2803	2523	34.8	15.7	179
BXRC-57C2001-C-7x	5700	70	630	3924	3532	34.8	21.9	179
BXRC-57C2001-D-7x	5700	70	500	2846	2561	31.8	15.9	179
BXRC-57E2001-B-7x	5700	80	450	2662	2396	34.8	15.7	170
BXRC-57E2001-C-7x	5700	80	630	3727	3354	34.8	21.9	170
BXRC-57E2001-D-7x	5700	80	500	2703	2433	31.8	15.9	170
BXRC-65C2001-B-7x	6500	70	450	2803	2523	34.8	15.7	179
BXRC-65C2001-C-7x	6500	70	630	3924	3532	34.8	21.9	179
BXRC-65C2001-D-7x	6500	70	500	2846	2561	31.8	15.9	179
BXRC-65E2001-B-7x	6500	80	450	2694	2424	34.8	15.7	172
BXRC-65E2001-C-7x	6500	80	630	3771	3394	34.8	21.9	172
BXRC-65E2001-D-7x	6500	80	500	2735	2461	31.8	15.9	172

Notes for Table 1:

1. Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to $T_c = 85^\circ\text{C}$.
2. CRI values are typical for Decor Series Ultra, Decor Series Street and Landmark and Decor Series Class A products. CRI values are minimums for all other products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, the minimum Rg value for 97 CRI products is 93. Bridgelux maintains a ± 3 tolerance on CRI and Rg values.
3. Drive current is referred to as nominal drive current.
4. Products tested under pulsed condition (10ms pulse width) at nominal test current where T_j (junction temperature) = T_c (case temperature) = 25°C .
5. Typical performance values are provided as a reference only and are not a guarantee of performance.
6. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
7. Minimum flux values at the nominal test current are guaranteed by 100% test.
8. Nominal CCT is defined by the Lighting Research Center's Class A definition. The center of the Class A color bin is on the corresponding isothermal line.
9. GAI value is 80. To help ensure optimal fixture level performance, GAI is measured at the fixture level, on axis, at a case temperature of 70°C . GAI may vary depending on fixture design and performance.

Product Selection Guide

Table 2: Selection Guide, Stabilized DC Performance ($T_c = 70^\circ\text{C}$) ^{7,8}

Part Number	Nominal CCT ¹ (K)	GAI ²	CRI ³	Nominal Drive Current ⁴ (mA)	Typical DC Flux ^{5,6} $T_c = 70^\circ\text{C}$ (lm)	Minimum DC Flux ^{5,9} $T_c = 70^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-30A2001-B-73	3000	80	93	450	1806	1625	34.4	15.5	117
BXRC-30A2001-C-73	3000	80	93	630	2528	2275	34.4	21.6	117
BXRC-30A2001-D-73	3000	80	93	500	1834	1650	31.2	15.6	118
BXRC-35A2001-B-73	3500	80	93	450	1922	1730	34.4	15.5	124
BXRC-35A2001-C-73	3500	80	93	630	2691	2422	34.4	21.6	124
BXRC-35A2001-D-73	3500	80	93	500	1952	1757	31.2	15.6	125
BXRC-40A2001-B-73	4000	80	93	450	2083	1874	34.4	15.5	135
BXRC-40A2001-C-73	4000	80	93	630	2916	2624	34.4	21.6	135
BXRC-40A2001-D-73	4000	80	93	500	2115	1903	31.2	15.6	136

Notes for Table 2:

1. Nominal CCT is defined by the Lighting Research Center's Class A definition. The center of the Class A color bin is on the corresponding isothermal line.
2. To help ensure optimal fixture level performance, GAI is measured at the fixture level, on axis, at a case temperature of 70°C . GAI may vary depending on fixture design and performance.
3. CRI Values are specified as typical.
4. Drive current is referred to as nominal drive current.
5. Typical performance values are provided as a reference only and are not a guarantee of performance.
6. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
7. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
8. Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at specified temperature. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
9. Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

Product Selection Guide

Table 3: Selection Guide, Stabilized DC Performance ($T_c = 85^\circ\text{C}$)^{4,5}

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical DC Flux ^{4,5} $T_c = 85^\circ\text{C}$ (lm)	Minimum DC Flux ⁶ $T_c = 85^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-27E2000-B-7x	2700	80	450	2255	2030	33.9	15.3	148
BXRC-27E2000-C-7x	2700	80	630	3157	2841	33.9	21.4	148
BXRC-27E2000-D-7x	2700	80	500	2290	2061	30.9	15.5	148
BXRC-27G20H0-B-7x	2700	90	450	1931	1738	33.9	15.3	127
BXRC-27G20H0-C-7x	2700	90	630	2703	2433	33.9	21.4	127
BXRC-27G20H0-D-7x	2700	90	500	1960	1764	30.9	15.5	127
BXRC-27G2000-B-7x	2700	90	450	1860	1674	33.9	15.3	122
BXRC-27G2000-C-7x	2700	90	630	2605	2344	33.9	21.4	122
BXRC-27G2000-D-7x	2700	90	500	1889	1700	30.9	15.5	122
BXRC-27H2000-B-7x	2700	97	450	1649	1484	33.9	15.3	108
BXRC-27H2000-C-7x	2700	97	630	2309	2078	33.9	21.4	108
BXRC-27H2000-D-7x	2700	97	500	1674	1507	30.9	15.5	108
BXRC-30C2001-B-74	3000	70	450	2509	2258	33.9	15.3	164
BXRC-30C2001-C-74	3000	70	630	3512	3161	33.9	21.4	164
BXRC-30C2001-D-74	3000	70	500	2547	2292	30.9	15.5	165
BXRC-30E2000-B-7x	3000	80	450	2396	2156	33.9	15.3	157
BXRC-30E2000-C-7x	3000	80	630	3354	3019	33.9	21.4	157
BXRC-30E2000-D-7x	3000	80	500	2433	2189	30.9	15.5	157
BXRC-30G20H0-B-7x	3000	90	450	2030	1827	33.9	15.3	133
BXRC-30G20H0-C-7x	3000	90	630	2841	2557	33.9	21.4	133
BXRC-30G20H0-D-7x	3000	90	500	2061	1855	30.9	15.5	133
BXRC-30G2000-B-7x	3000	90	450	1945	1750	33.9	15.3	127
BXRC-30G2000-C-7x	3000	90	630	2723	2451	33.9	21.4	127
BXRC-30G2000-D-7x	3000	90	500	1975	1777	30.9	15.5	128
BXRC-30G200C-B-73	3000	90	450	1885	1697	34.1	15.3	123
BXRC-30G200C-D-73	3000	90	500	1903	1713	30.9	15.5	123
BXRC-30H2000-B-7x	3000	97	450	1762	1586	33.9	15.3	115
BXRC-30H2000-C-7x	3000	97	630	2466	2220	33.9	21.4	115
BXRC-30H2000-D-7x	3000	97	500	1789	1610	30.9	15.5	116
BXRC-30A2001-B-7x ^{7,8}	3000	93	450	1748	1573	33.9	15.3	115
BXRC-30A2001-C-7x ^{7,8}	3000	93	630	2447	2202	33.9	21.4	115
BXRC-30A2001-D-7x ^{7,8}	3000	93	500	1774	1597	30.9	15.5	115

Notes for Table 3:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to $T_c = 85^\circ\text{C}$.
- All CRI values are measured at $T_c = 25^\circ\text{C}$. CRI values are typical for Decor Series Ultra, Decor Series Street and Landmark and Decor Series Class A products. CRI values are minimums for all other products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, the minimum Rg value for 97 CRI products is 93. Bridgelux maintains a ± 3 tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at 85°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Nominal CCT is defined by the Lighting Research Center's Class A definition. The center of the Class A color bin is on the corresponding isothermal line.
- GAI value is 80. To help ensure optimal fixture level performance, GAI is measured at the fixture level, on axis, at a case temperature of 70°C . GAI may vary depending on fixture design and performance.

Product Selection Guide

Table 3: Selection Guide, Stabilized DC Performance ($T_c = 85^\circ\text{C}$) ^{4,5} (continued)

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical DC Flux ^{4,5} $T_c = 85^\circ\text{C}$ (lm)	Minimum DC Flux ⁶ $T_c = 85^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-35E2000-B-7x	3500	80	450	2452	2207	33.9	15.3	161
BXRC-35E2000-C-7x	3500	80	630	3433	3090	33.9	21.4	161
BXRC-35E2000-D-7x	3500	80	500	2490	2241	30.9	15.5	161
BXRC-35G2000-B-7x	3500	90	450	2015	1814	33.9	15.3	132
BXRC-35G2000-C-7x	3500	90	630	2822	2539	33.9	21.4	132
BXRC-35G2000-D-7x	3500	90	500	2046	1842	30.9	15.5	132
BXRC-35A2001-B-73 ^{7,8}	3500	93	450	1860	1674	33.9	15.3	122
BXRC-35A2001-C-73 ^{7,8}	3500	93	630	2605	2344	33.9	21.4	122
BXRC-35A2001-D-73 ^{7,8}	3500	93	500	1889	1700	30.9	15.5	122
BXRC-40C2001-B-74	4000	70	450	2579	2321	33.9	15.3	169
BXRC-40C2001-C-74	4000	70	630	3611	3250	33.9	21.4	169
BXRC-40C2001-D-74	4000	70	500	2619	2357	30.9	15.5	169
BXRC-40E2000-B-7x	4000	80	450	2466	2220	33.9	15.3	162
BXRC-40E2000-C-7x	4000	80	630	3453	3108	33.9	21.4	162
BXRC-40E2000-D-7x	4000	80	500	2504	2254	30.9	15.5	162
BXRC-40G2000-B-7x	4000	90	450	2058	1852	33.9	15.3	135
BXRC-40G2000-C-7x	4000	90	630	2881	2593	33.9	21.4	135
BXRC-40G2000-D-7x	4000	90	500	2089	1880	30.9	15.5	135
BXRC-40H2000-B-73	4000	97	450	1860	1674	33.9	15.3	122
BXRC-40H2000-C-73	4000	97	630	2605	2344	33.9	21.4	122
BXRC-40H2000-D-73	4000	97	500	1889	1700	30.9	15.5	122
BXRC-40A2001-B-73 ^{7,8}	4000	93	450	2015	1814	33.9	15.3	132
BXRC-40A2001-C-73 ^{7,8}	4000	93	630	2822	2539	33.9	21.4	132
BXRC-40A2001-D-73 ^{7,8}	4000	93	500	2046	1842	30.9	15.5	132
BXRC-50C2001-B-7x	5000	70	450	2593	2334	33.9	15.3	170
BXRC-50C2001-C-7x	5000	70	630	3631	3268	33.9	21.4	170
BXRC-50C2001-D-7x	5000	70	500	2633	2370	30.9	15.5	170
BXRC-50E2001-B-7x	5000	80	450	2495	2245	33.9	15.3	164
BXRC-50E2001-C-7x	5000	80	630	3492	3143	33.9	21.4	164
BXRC-50E2001-D-7x	5000	80	500	2533	2280	30.9	15.5	164
BXRC-50G2001-B-7x	5000	90	450	2156	1941	33.9	15.3	141
BXRC-50G2001-C-7x	5000	90	630	3019	2717	33.9	21.4	141
BXRC-50G2001-D-7x	5000	90	500	2189	1970	30.9	15.5	142

Notes for Table 3:

- Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to $T_c = 85^\circ\text{C}$.
- All CRI values are measured at $T_c = 25^\circ\text{C}$. CRI values are typical for Decor Series Ultra, Decor Series Street and Landmark and Decor Series Class A products. CRI values are minimums for all other products. Minimum Rg value for 80 CRI products is 0, the minimum Rg value for 90 CRI products is 50, the minimum Rg value for 97 CRI products is 93. Bridgelux maintains a ± 3 tolerance on CRI and Rg values.
- Drive current is referred to as nominal drive current.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at 85°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Nominal CCT is defined by the Lighting Research Center's Class A definition. The center of the Class A color bin is on the corresponding isothermal line.
- GAI value is 80. To help ensure optimal fixture level performance, GAI is measured at the fixture level, on axis, at a case temperature of 70°C . GAI may vary depending on fixture design and performance.

Product Selection Guide

Table 3: Selection Guide, Stabilized DC Performance ($T_c = 85^\circ\text{C}$) ^{4,5}

Part Number	Nominal CCT ¹ (K)	CRI ²	Nominal Drive Current ³ (mA)	Typical DC Flux ^{4,5} $T_c = 85^\circ\text{C}$ (lm)	Minimum DC Flux ⁶ $T_c = 85^\circ\text{C}$ (lm)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRC-57C2001-B-7x	5700	70	450	2523	2271	33.9	15.3	165
BXRC-57C2001-C-7x	5700	70	630	3532	3179	33.9	21.4	165
BXRC-57C2001-D-7x	5700	70	500	2561	2305	30.9	15.5	166
BXRC-57E2001-B-7x	5700	80	450	2396	2156	33.9	15.3	157
BXRC-57E2001-C-7x	5700	80	630	3354	3019	33.9	21.4	157
BXRC-57E2001-D-7x	5700	80	500	2433	2189	30.9	15.5	157
BXRC-65C2001-B-7x	6500	70	450	2523	2271	33.9	15.3	165
BXRC-65C2001-C-7x	6500	70	630	3532	3179	33.9	21.4	165
BXRC-65C2001-D-7x	6500	70	500	2561	2305	30.9	15.5	166
BXRC-65E2001-B-7x	6500	80	450	2424	2182	33.9	15.3	159
BXRC-65E2001-C-7x	6500	80	630	3394	3054	33.9	21.4	159
BXRC-65E2001-D-7x	6500	80	500	2461	2215	30.9	15.5	159

Notes for Table 3:

1. Nominal CCT as defined by ANSI C78.377-2011. Products with a CCT of 5000K-6500K are hot targeted to $T_c = 85^\circ\text{C}$.
2. All CRI values are measured at $T_1 = T_2 = 25^\circ\text{C}$. CRI values are typical for Decor Series Ultra, Decor Series Street and Landmark and Decor Series Class A products. CRI values are minimums for all other products. Minimum R_g value for 80 CRI products is 0, the minimum R_g value for 90 CRI products is 50, the minimum R_g value for 97 CRI products is 93. Bridgelux maintains a ± 3 tolerance on CRI and R_g values.
3. Drive current is referred to as nominal drive current.
4. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
5. Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at 85°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
6. Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
7. Nominal CCT is defined by the Lighting Research Center's Class A definition. The center of the Class A color bin is on the corresponding isothermal line.
8. GAI value is 80. To help ensure optimal fixture level performance, GAI is measured at the fixture level, on axis, at a case temperature of 70°C . GAI may vary depending on fixture design and performance.

Performance at Commonly Used Drive Currents

Vero LED arrays are tested to the specifications shown using the nominal drive currents in Table 1. Vero may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figures 1, 2 & 3 and the flux vs. current characteristics shown in Figures 4, 5 & 6. The performance at commonly used drive currents is summarized in Table 4.

Table 4: Product Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _c = 25°C (V)	Typical Power T _c = 25°C (W)	Typical Flux ² T _c = 25°C (lm)	Typical DC Flux ³ T _c = 85°C (lm)	Typical Efficacy T _c = 25°C (lm/W)
BXRC-27E2000-B-7x	80	113	33.2	3.7	664	604	178
		225	34.0	7.7	1292	1172	169
		450	34.8	15.7	2506	2255	160
		675	35.6	24.1	3613	3221	150
		900	36.1	32.5	4640	4091	143
BXRC-27E2000-C-7x	80	158	33.2	5.2	930	846	178
		315	34.0	10.7	1809	1640	169
		630	34.8	21.9	3508	3157	160
		945	35.6	33.7	5059	4510	150
		1260	36.1	45.5	6496	5727	143
BXRC-27E2000-D-7x	80	125	29.6	3.7	679	617	184
		250	30.3	7.6	1320	1196	174
		500	31.8	15.9	2544	2290	160
		750	33.2	24.9	3695	3294	148
		1000	34.4	34.4	4761	4198	138
BXRC-27G20H0-B-7x	90	113	33.2	3.7	569	517	152
		225	34.0	7.7	1107	1003	145
		450	34.8	15.7	2145	1931	137
		675	35.6	24.1	3094	2758	129
		900	36.1	32.5	3973	3503	122
BXRC-27G20H0-C-7x	90	158	33.2	5.2	796	724	152
		315	34.0	10.7	1549	1405	145
		630	34.8	21.9	3004	2703	137
		945	35.6	33.7	4332	3861	129
		1260	36.1	45.5	5562	4904	122
BXRC-27G20H0-D-7x	90	125	29.6	3.7	581	529	157
		250	30.3	7.6	1130	1024	149
		500	31.8	15.9	2178	1960	137
		750	33.2	24.9	3164	2821	127
		1000	34.4	34.4	4076	3594	118
BXRC-27G2000-B-7x	90	113	33.2	3.7	548	498	147
		225	34.0	7.7	1066	967	139
		450	34.8	15.7	2067	1860	132
		675	35.6	24.1	2981	2658	124
		900	36.1	32.5	3828	3375	118
BXRC-27G2000-C-7x	90	158	33.2	5.2	767	698	147
		315	34.0	10.7	1493	1353	139
		630	34.8	21.9	2894	2605	132
		945	35.6	33.7	4174	3721	124
		1260	36.1	45.5	5359	4725	118

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 4: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _c = 25°C (V)	Typical Power T _c = 25°C (W)	Typical Flux ² T _c = 25°C (lm)	Typical DC Flux ³ T _c = 85°C (lm)	Typical Efficacy T _c = 25°C (lm/W)
BXRC-27G2000-D-7x	90	125	29.6	3.7	560	509	152
		250	30.3	7.6	1089	987	144
		500	31.8	15.9	2099	1889	132
		750	33.2	24.9	3049	2718	122
		1000	34.4	34.4	3928	3463	114
BXRC-27H2000-B-7x	97	113	33.2	3.7	486	442	130
		225	34.0	7.7	945	857	124
		450	34.8	15.7	1832	1649	117
		675	35.6	24.1	2642	2356	110
		900	36.1	32.5	3393	2991	104
BXRC-27H2000-C-7x	97	158	33.2	5.2	680	618	130
		315	34.0	10.7	1323	1200	124
		630	34.8	21.9	2565	2309	117
		945	35.6	33.7	3699	3298	110
		1260	36.1	45.5	4750	4188	104
BXRC-27H2000-D-7x	97	125	29.6	3.7	496	451	134
		250	30.3	7.6	965	875	127
		500	31.8	15.9	1860	1674	117
		750	33.2	24.9	2702	2409	109
		1000	34.4	34.4	3481	3069	101
BXRC-30C2001-B-74	70	113	33.2	3.7	739	672	198
		225	34.0	7.7	1438	1304	188
		450	34.8	15.7	2787	2509	178
		675	35.6	24.1	4020	3584	167
		900	36.1	32.5	5162	4551	159
BXRC-30C2001-C-74	70	158	33.2	5.2	1035	941	198
		315	34.0	10.7	2013	1825	188
		630	34.8	21.9	3902	3512	178
		945	35.6	33.7	5628	5017	167
		1260	36.1	45.5	7226	6371	159
BXRC-30C2001-D-74	70	125	29.6	3.7	755	687	204
		250	30.3	7.6	1468	1331	194
		500	31.8	15.9	2830	2547	178
		750	33.2	24.9	4111	3665	165
		1000	34.4	34.4	5296	4670	154
BXRC-30E2000-B-7x	80	113	33.2	3.7	706	642	189
		225	34.0	7.7	1373	1245	179
		450	34.8	15.7	2662	2396	170
		675	35.6	24.1	3839	3423	160
		900	36.1	32.5	4930	4346	152
BXRC-30E2000-C-7x	80	158	33.2	5.2	988	899	189
		315	34.0	10.7	1922	1743	179
		630	34.8	21.9	3727	3354	170
		945	35.6	33.7	5375	4792	160
		1260	36.1	45.5	6901	6085	152

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 4: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux ² $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-30E2000-D-7x	80	125	29.6	3.7	721	656	195
		250	30.3	7.6	1402	1271	185
		500	31.8	15.9	2703	2433	170
		750	33.2	24.9	3926	3500	158
		1000	34.4	34.4	5058	4460	147
BXRC-30G20H0-B-7x	90	113	33.2	3.7	598	544	160
		225	34.0	7.7	1163	1055	152
		450	34.8	15.7	2255	2030	144
		675	35.6	24.1	3252	2899	135
		900	36.1	32.5	4176	3682	128
BXRC-30G20H0-C-7x	90	158	33.2	5.2	837	761	160
		315	34.0	10.7	1628	1476	152
		630	34.8	21.9	3157	2841	144
		945	35.6	33.7	4553	4059	135
		1260	36.1	45.5	5846	5154	128
BXRC-30G20H0-D-7x	90	125	29.6	3.7	611	556	165
		250	30.3	7.6	1188	1077	157
		500	31.8	15.9	2290	2061	144
		750	33.2	24.9	3326	2965	134
		1000	34.4	34.4	4285	3778	124
BXRC-30G2000-B-7x	90	113	33.2	3.7	573	521	153
		225	34.0	7.7	1115	1011	146
		450	34.8	15.7	2161	1945	138
		675	35.6	24.1	3117	2778	130
		900	36.1	32.5	4002	3528	123
BXRC-30G2000-C-7x	90	158	33.2	5.2	802	729	153
		315	34.0	10.7	1561	1415	146
		630	34.8	21.9	3026	2723	138
		945	35.6	33.7	4363	3890	130
		1260	36.1	45.5	5602	4940	123
BXRC-30G2000-D-7x	90	125	29.6	3.7	585	532	158
		250	30.3	7.6	1138	1032	150
		500	31.8	15.9	2194	1975	138
		750	33.2	24.9	3187	2841	128
		1000	34.4	34.4	4106	3620	119
BXRC-30G200C-B-73	90	113	33.2	3.7	555	505	149
		225	34.0	7.7	1080	980	141
		450	34.8	15.7	2095	1885	134
		675	35.6	24.1	3021	2693	126
		900	36.1	32.5	3879	3420	119
BXRC-30G200C-D-73	90	125	29.6	3.7	564	513	153
		250	30.3	7.6	1097	994	145
		500	31.8	15.9	2115	1903	133
		750	33.2	24.9	3072	2738	123
		1000	34.4	34.4	3957	3489	115

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 4: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _c = 25°C (V)	Typical Power T _c = 25°C (W)	Typical Flux ² T _c = 25°C (lm)	Typical DC Flux ³ T _c = 85°C (lm)	Typical Efficacy T _c = 25°C (lm/W)
BXRC-30H2000-B-7x	97	113	33.2	3.7	519	472	139
		225	34.0	7.7	1010	915	132
		450	34.8	15.7	1958	1762	125
		675	35.6	24.1	2823	2517	117
		900	36.1	32.5	3625	3196	111
BXRC-30H2000-C-7x	97	158	33.2	5.2	727	661	139
		315	34.0	10.7	1414	1282	132
		630	34.8	21.9	2741	2466	125
		945	35.6	33.7	3952	3523	117
		1260	36.1	45.5	5075	4474	111
BXRC-30H2000-D-7x	97	125	29.6	3.7	530	482	144
		250	30.3	7.6	1031	935	136
		500	31.8	15.9	1988	1789	125
		750	33.2	24.9	2887	2574	116
		1000	34.4	34.4	3719	3279	108
BXRC-30A2001-B-73	93	113	33.2	3.7	515	468	138
		225	34.0	7.7	1002	908	131
		450	34.8	15.7	1942	1748	124
		675	35.6	24.1	2800	2496	116
		900	36.1	32.5	3596	3170	111
BXRC-30A2001-C-73	93	158	33.2	5.2	721	655	138
		315	34.0	10.7	1402	1271	131
		630	34.8	21.9	2719	2447	124
		945	35.6	33.7	3921	3495	116
		1260	36.1	45.5	5034	4438	111
BXRC-30A2001-D-73	93	125	29.6	3.7	526	478	142
		250	30.3	7.6	1023	927	135
		500	31.8	15.9	1972	1774	124
		750	33.2	24.9	2864	2553	115
		1000	34.4	34.4	3690	3253	107
BXRC-35E2000-B-7x	80	113	33.2	3.7	722	657	193
		225	34.0	7.7	1405	1274	184
		450	34.8	15.7	2725	2452	174
		675	35.6	24.1	3930	3503	163
		900	36.1	32.5	5046	4449	155
BXRC-35E2000-C-7x	80	158	33.2	5.2	1011	920	193
		315	34.0	10.7	1968	1784	184
		630	34.8	21.9	3815	3433	174
		945	35.6	33.7	5502	4904	163
		1260	36.1	45.5	7064	6228	155
BXRC-35E2000-D-7x	80	125	29.6	3.7	738	671	200
		250	30.3	7.6	1435	1301	189
		500	31.8	15.9	2767	2490	174
		750	33.2	24.9	4019	3583	161
		1000	34.4	34.4	5177	4565	150

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 4: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _c = 25°C (V)	Typical Power T _c = 25°C (W)	Typical Flux ² T _c = 25°C (lm)	Typical DC Flux ³ T _c = 85°C (lm)	Typical Efficacy T _c = 25°C (lm/W)
BXRC-35G2000-B-7x	90	113	33.2	3.7	594	540	159
		225	34.0	7.7	1155	1047	151
		450	34.8	15.7	2239	2015	143
		675	35.6	24.1	3230	2879	134
		900	36.1	32.5	4147	3656	127
BXRC-35G2000-C-7x	90	158	33.2	5.2	831	756	159
		315	34.0	10.7	1617	1466	151
		630	34.8	21.9	3135	2822	143
		945	35.6	33.7	4521	4031	134
		1260	36.1	45.5	5805	5119	127
BXRC-35G2000-D-7x	90	125	29.6	3.7	607	552	164
		250	30.3	7.6	1179	1069	155
		500	31.8	15.9	2274	2046	143
		750	33.2	24.9	3303	2944	133
		1000	34.4	34.4	4255	3752	124
BXRC-35A2001-B-73	93	113	33.2	3.7	548	498	147
		225	34.0	7.7	1066	967	139
		450	34.8	15.7	2067	1860	132
		675	35.6	24.1	2981	2658	124
		900	36.1	32.5	3828	3375	118
BXRC-35A2001-C-73	93	158	33.2	5.2	767	698	147
		315	34.0	10.7	1493	1353	139
		630	34.8	21.9	2894	2605	132
		945	35.6	33.7	4174	3721	124
		1260	36.1	45.5	5359	4725	118
BXRC-35A2001-D-73	93	125	29.6	3.7	560	509	152
		250	30.3	7.6	1089	987	144
		500	31.8	15.9	2099	1889	132
		750	33.2	24.9	3049	2718	122
		1000	34.4	34.4	3928	3463	114
BXRC-40C2001-B-74	70	113	33.2	3.7	760	691	203
		225	34.0	7.7	1478	1340	193
		450	34.8	15.7	2866	2579	183
		675	35.6	24.1	4133	3684	172
		900	36.1	32.5	5307	4679	163
BXRC-40C2001-C-74	70	158	33.2	5.2	1064	967	203
		315	34.0	10.7	2069	1876	193
		630	34.8	21.9	4012	3611	183
		945	35.6	33.7	5786	5158	172
		1260	36.1	45.5	7429	6550	163
BXRC-40C2001-D-74	70	125	29.6	3.7	776	706	210
		250	30.3	7.6	1509	1368	199
		500	31.8	15.9	2910	2619	183
		750	33.2	24.9	4227	3768	170
		1000	34.4	34.4	5445	4801	158

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 4: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux ² $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-40E2000-B-7x	80	113	33.2	3.7	727	661	194
		225	34.0	7.7	1414	1282	185
		450	34.8	15.7	2741	2466	175
		675	35.6	24.1	3952	3523	164
		900	36.1	32.5	5075	4474	156
BXRC-40E2000-C-7x	80	158	33.2	5.2	1017	925	194
		315	34.0	10.7	1979	1794	185
		630	34.8	21.9	3837	3453	175
		945	35.6	33.7	5533	4933	164
		1260	36.1	45.5	7104	6264	156
BXRC-40E2000-D-7x	80	125	29.6	3.7	742	675	201
		250	30.3	7.6	1443	1308	190
		500	31.8	15.9	2783	2504	175
		750	33.2	24.9	4042	3603	162
		1000	34.4	34.4	5207	4591	151
BXRC-40G2000-B-7x	90	113	33.2	3.7	606	551	162
		225	34.0	7.7	1179	1069	154
		450	34.8	15.7	2286	2058	146
		675	35.6	24.1	3297	2939	137
		900	36.1	32.5	4234	3733	130
BXRC-40G2000-C-7x	90	158	33.2	5.2	849	772	162
		315	34.0	10.7	1651	1497	154
		630	34.8	21.9	3201	2881	146
		945	35.6	33.7	4616	4115	137
		1260	36.1	45.5	5927	5226	130
BXRC-40G2000-D-7x	90	125	29.6	3.7	619	563	168
		250	30.3	7.6	1204	1092	159
		500	31.8	15.9	2321	2089	146
		750	33.2	24.9	3372	3006	135
		1000	34.4	34.4	4344	3830	126
BXRC-40H2000-B-7x	97	113	33.2	3.7	548	498	147
		225	34.0	7.7	1066	967	139
		450	34.8	15.7	2067	1860	132
		675	35.6	24.1	2981	2658	124
		900	36.1	32.5	3828	3375	118
BXRC-40H2000-C-7x	97	158	33.2	5.2	767	698	147
		315	34.0	10.7	1493	1353	139
		630	34.8	21.9	2894	2605	132
		945	35.6	33.7	4174	3721	124
		1260	36.1	45.5	5359	4725	118
BXRC-40H2000-D-7x	97	125	29.6	3.7	560	509	152
		250	30.3	7.6	1089	987	144
		500	31.8	15.9	2099	1889	132
		750	33.2	24.9	3049	2718	122
		1000	34.4	34.4	3928	3463	114

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 4: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _c = 25°C (V)	Typical Power T _c = 25°C (W)	Typical Flux ² T _c = 25°C (lm)	Typical DC Flux ³ T _c = 85°C (lm)	Typical Efficacy T _c = 25°C (lm/W)
BXRC-40A2001-B-73	93	113	33.2	3.7	594	540	159
		225	34.0	7.7	1155	1047	151
		450	34.8	15.7	2239	2015	143
		675	35.6	24.1	3230	2879	134
		900	36.1	32.5	4147	3656	127
BXRC-40A2001-C-73	93	158	33.2	5.2	831	756	159
		315	34.0	10.7	1617	1466	151
		630	34.8	21.9	3135	2822	143
		945	35.6	33.7	4521	4031	134
		1260	36.1	45.5	5805	5119	127
BXRC-40A2001-D-73	93	125	29.6	3.7	607	552	164
		250	30.3	7.6	1179	1069	155
		500	31.8	15.9	2274	2046	143
		750	33.2	24.9	3303	2944	133
		1000	34.4	34.4	4255	3752	124
BXRC-50C2001-B-7x	70	113	33.2	3.7	764	695	204
		225	34.0	7.7	1486	1347	194
		450	34.8	15.7	2881	2593	184
		675	35.6	24.1	4155	3704	173
		900	36.1	32.5	5336	4704	164
BXRC-50C2001-C-7x	70	158	33.2	5.2	1069	973	204
		315	34.0	10.7	2081	1886	194
		630	34.8	21.9	4034	3631	184
		945	35.6	33.7	5818	5186	173
		1260	36.1	45.5	7470	6586	164
BXRC-50C2001-D-7x	70	125	29.6	3.7	781	710	211
		250	30.3	7.6	1517	1376	200
		500	31.8	15.9	2926	2633	184
		750	33.2	24.9	4250	3788	171
		1000	34.4	34.4	5475	4827	159
BXRC-50E2001-B-7x	80	113	33.2	3.7	735	668	197
		225	34.0	7.7	1430	1296	187
		450	34.8	15.7	2772	2495	177
		675	35.6	24.1	3997	3564	166
		900	36.1	32.5	5133	4525	158
BXRC-50E2001-C-7x	80	158	33.2	5.2	1029	936	197
		315	34.0	10.7	2002	1815	187
		630	34.8	21.9	3881	3492	177
		945	35.6	33.7	5596	4989	166
		1260	36.1	45.5	7186	6336	158
BXRC-50E2001-D-7x	80	125	29.6	3.7	751	683	203
		250	30.3	7.6	1460	1323	192
		500	31.8	15.9	2814	2533	177
		750	33.2	24.9	4088	3644	164
		1000	34.4	34.4	5267	4644	153

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 4: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V _f T _c = 25°C (V)	Typical Power T _c = 25°C (W)	Typical Flux ² T _c = 25°C (lm)	Typical DC Flux ³ T _c = 85°C (lm)	Typical Efficacy T _c = 25°C (lm/W)
BXRC-50G2001-B-7x	90	113	33.2	3.7	635	578	170
		225	34.0	7.7	1236	1120	162
		450	34.8	15.7	2396	2156	153
		675	35.6	24.1	3455	3080	144
		900	36.1	32.5	4437	3912	136
BXRC-50G2001-C-7x	90	158	33.2	5.2	889	809	170
		315	34.0	10.7	1730	1569	162
		630	34.8	21.9	3354	3019	153
		945	35.6	33.7	4838	4312	144
		1260	36.1	45.5	6211	5476	136
BXRC-50G2001-D-7x	90	125	29.6	3.7	649	590	176
		250	30.3	7.6	1262	1144	166
		500	31.8	15.9	2433	2189	153
		750	33.2	24.9	3534	3150	142
		1000	34.4	34.4	4553	4014	132
BXRC-57C2001-B-7x	70	113	33.2	3.7	743	676	199
		225	34.0	7.7	1446	1311	189
		450	34.8	15.7	2803	2523	179
		675	35.6	24.1	4043	3604	168
		900	36.1	32.5	5191	4577	160
BXRC-57C2001-C-7x	70	158	33.2	5.2	1040	946	199
		315	34.0	10.7	2024	1835	189
		630	34.8	21.9	3924	3532	179
		945	35.6	33.7	5660	5045	168
		1260	36.1	45.5	7267	6407	160
BXRC-57C2001-D-7x	70	125	29.6	3.7	759	691	206
		250	30.3	7.6	1476	1338	195
		500	31.8	15.9	2846	2561	179
		750	33.2	24.9	4134	3686	166
		1000	34.4	34.4	5326	4696	155
BXRC-57E2001-B-7x	80	113	33.2	3.7	706	642	189
		225	34.0	7.7	1373	1245	179
		450	34.8	15.7	2662	2396	170
		675	35.6	24.1	3839	3423	160
		900	36.1	32.5	4930	4346	152
BXRC-57E2001-C-7x	80	158	33.2	5.2	988	899	189
		315	34.0	10.7	1922	1743	179
		630	34.8	21.9	3727	3354	170
		945	35.6	33.7	5375	4792	160
		1260	36.1	45.5	6901	6085	152
BXRC-57E2001-D-7x	80	125	29.6	3.7	721	656	195
		250	30.3	7.6	1402	1271	185
		500	31.8	15.9	2703	2433	170
		750	33.2	24.9	3926	3500	158
		1000	34.4	34.4	5058	4460	147

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 4: Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_c = 25^\circ\text{C}$ (V)	Typical Power $T_c = 25^\circ\text{C}$ (W)	Typical Flux ² $T_c = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_c = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_c = 25^\circ\text{C}$ (lm/W)
BXRC-65C2001-B-7x	70	113	33.2	3.7	743	676	199
		225	34.0	7.7	1446	1311	189
		450	34.8	15.7	2803	2523	179
		675	35.6	24.1	4043	3604	168
		900	36.1	32.5	5191	4577	160
BXRC-65C2001-C-7x	70	158	33.2	5.2	1040	946	199
		315	34.0	10.7	2024	1835	189
		630	34.8	21.9	3924	3532	179
		945	35.6	33.7	5660	5045	168
		1260	36.1	45.5	7267	6407	160
BXRC-65C2001-D-7x	70	125	29.6	3.7	759	691	206
		250	30.3	7.6	1476	1338	195
		500	31.8	15.9	2846	2561	179
		750	33.2	24.9	4134	3686	166
		1000	34.4	34.4	5326	4696	155
BXRC-65E2001-B-7x	80	113	33.2	3.7	714	649	191
		225	34.0	7.7	1389	1260	182
		450	34.8	15.7	2694	2424	172
		675	35.6	24.1	3884	3463	161
		900	36.1	32.5	4988	4398	153
BXRC-65E2001-C-7x	80	158	33.2	5.2	1000	909	191
		315	34.0	10.7	1945	1763	182
		630	34.8	21.9	3771	3394	172
		945	35.6	33.7	5438	4848	161
		1260	36.1	45.5	6983	6157	153
BXRC-65E2001-D-7x	80	125	29.6	3.7	730	664	198
		250	30.3	7.6	1418	1286	187
		500	31.8	15.9	2735	2461	172
		750	33.2	24.9	3973	3541	160
		1000	34.4	34.4	5118	4512	149

Notes for Table 4:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Electrical Characteristics

Table 5: Electrical Characteristics

Part Number	Drive Current (mA)	Forward Voltage Pulsed, $T_c = 25^{\circ}\text{C}$ (V) ^{1, 2, 3, 8}			Typical Coefficient of Forward Voltage ⁴ $\Delta V_f / \Delta T_c$ (mV/ $^{\circ}\text{C}$)	Typical Thermal Resistance Junction to Case ^{5,6} R_{j-c} ($^{\circ}\text{C}/\text{W}$)	Driver Selection Voltages ⁷ (V)	
		Minimum	Typical	Maximum			V_f Min. Hot $T_c = 105^{\circ}\text{C}$ (V)	V_f Max. Cold $T_c = -40^{\circ}\text{C}$ (V)
BXR-xxx200x-B-7x	450	32.2	34.8	37.4	-14.3	0.28	31.0	38.3
	900	33.4	36.1	38.8	-14.3	0.35	32.2	39.7
BXR-xxx200x-C-7x	630	32.2	34.8	37.4	-14.3	0.20	31.0	38.3
	1260	33.4	36.1	38.8	-14.3	0.24	32.2	39.7
BXR-xxx200x-D-7x	500	29.4	31.8	34.2	-13.3	0.34	28.4	35.0
	1000	31.8	34.4	37.0	-13.3	0.41	30.8	37.9

Notes for Table 5:

- Parts are tested in pulsed conditions, $T_c = 25^{\circ}\text{C}$. Pulse width is 10ms.
- Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
- Bridgelux maintains a tester tolerance of $\pm 0.10\text{V}$ on forward voltage measurements.
- Typical coefficient of forward voltage tolerance is $\pm 0.1\text{mV}$ for nominal current.
- Thermal resistance values are based from test data of a 3000K 80 CRI product.
- Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power. The thermal interface material used during testing is not included in the thermal resistance value.
- V_f min hot and max cold values are provided as reference only and are not guaranteed by test. These values are provided to aid in driver design and selection over the operating range of the product.
- This product has been designed and manufactured per IEC 62031:2014. This product has passed dielectric withstand voltage testing at 1160 V. The working voltage designated for the insulation is 80V d.c. The maximum allowable voltage across the array must be determined in the end product application.

Eye Safety

Table 6: Eye Safety Risk Group (RG) Classifications

Part Number	Drive Current ⁵ (mA)	CCT ^{1,5}			
		2700K/3000K	4000K ²	5000K ³	6500K ⁴
BXRC-xxx200x-B-7x	450	RG1	RG1	RG1	RG1
	675	RG1	RG1	RG1	RG2
	900	RG1	RG1	RG2	RG2
BXRC-xxx200x-C-7x	630	RG1	RG1	RG1	RG1
	945	RG1	RG1	RG2	RG2
	1260	RG1	RG2	RG2	RG2
BXRC-xxx200x-D-7x	500	RG1	RG1	RG1	RG1
	750	RG1	RG1	RG1	RG2
	1000	RG1	RG1	RG2	RG2

Notes for Table 6:

1. Eye safety classification for the use of Bridgelux Vero Series LED arrays is in accordance with specification IEC/TR 62778: Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires.
2. For products classified as RG2 at 4000K, $E_{thr} = 1847.5$ lx.
3. For products classified as RG2 at 5000K $E_{thr} = 1315.8$ lx.
4. For products classified as RG2 at 6500K, $E_{thr} = 1124.5$ lx.
5. Please contact your Bridgelux sales representative for E_{thr} values at specific drive currents and CCTs not listed.

Absolute Maximum Ratings

Table 7: Maximum Ratings

Parameter	Maximum Rating		
LED Junction Temperature (T_j)	150°C		
Storage Temperature	-40°C to +105°C		
Operating Case Temperature ¹ (T_c)	105°C		
Soldering Temperature ²	300°C or lower for a maximum of 6 seconds		
	BXRC-xxx200x-B-7x	BXRC-xxx200x-C-7x	BXRC-xxx200x-D-7x
Maximum Drive Current ³	900mA	1260mA	1000mA
Maximum Peak Pulsed Drive Current ⁴	1290mA	1800mA	1430mA
Maximum Reverse Voltage ⁵	-60V	-60V	-55V

Notes for Table 7:

1. For IEC 62717 requirement, please consult your Bridgelux sales representative.
2. Refer to Bridgelux Application Note AN31: Assembly Considerations for Bridgelux Vero LED Arrays.
3. Arrays may be driven at higher currents however lumen maintenance may be reduced.
4. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 20 ms when operating LED Arrays at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where LED Arrays can be driven without catastrophic failures.
5. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.

Performance Curves

Figure 1: Vero 13B Drive Current vs. Voltage

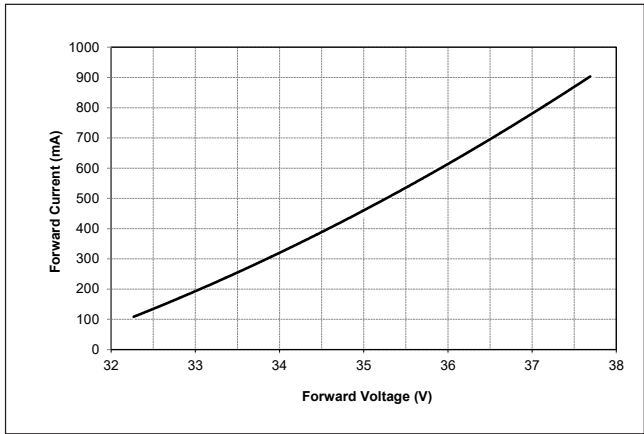


Figure 2: Vero 13C Drive Current vs. Voltage

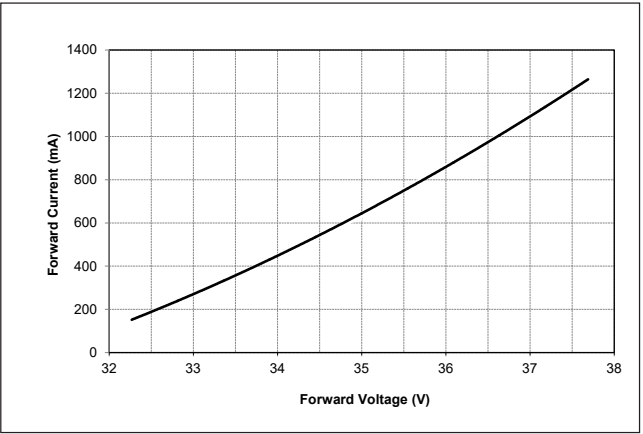


Figure 3: Vero 13D Drive Current vs. Voltage

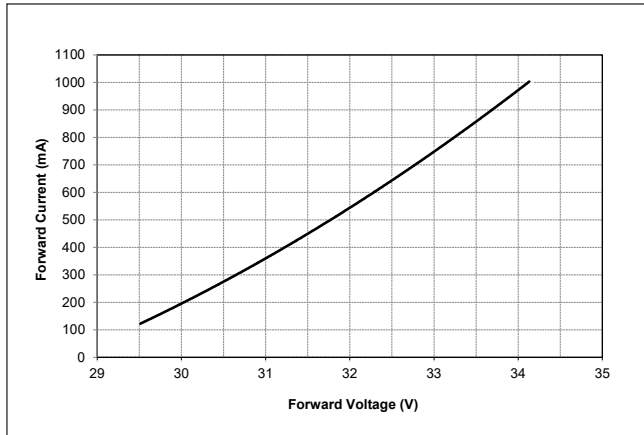


Figure 4: Vero 13B Typical Relative Flux vs. Current

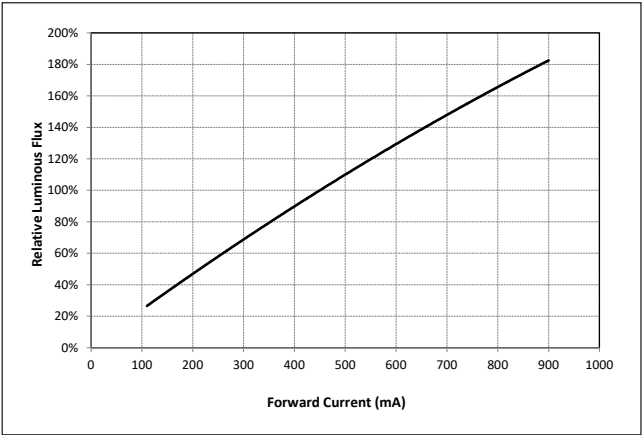


Figure 5: Vero 13C Typical Relative Flux vs. Current


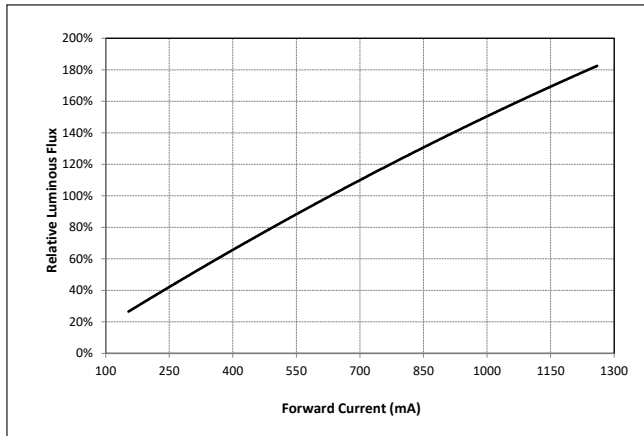


Figure 6: Vero 13D Typical Relative Flux vs. Current

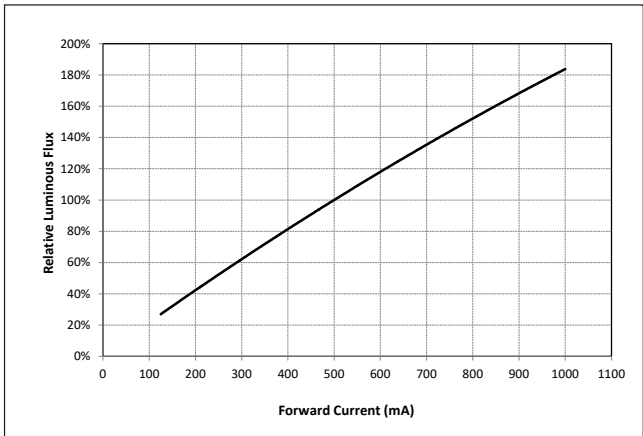

Note for Figure 1-6:

1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.
2. Products tested under pulsed condition (10ms pulse width) at nominal test current where T_j (junction temperature) = T_c (case temperature) = 25°C.

Performance Curves

Figure 7: Typical DC Flux vs. Case Temperature

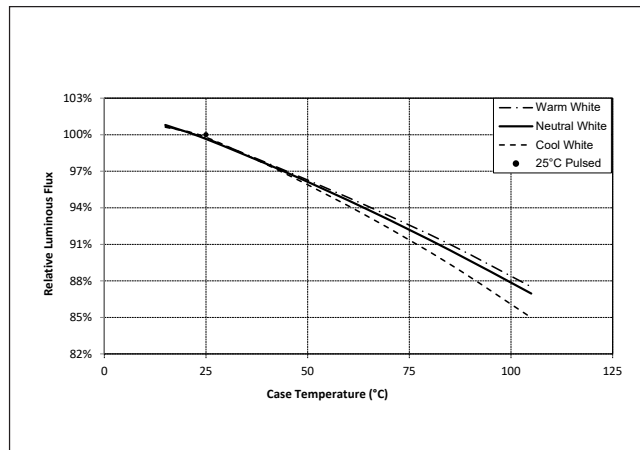


Figure 8: Typical DC ccy Shift vs. Case Temperature


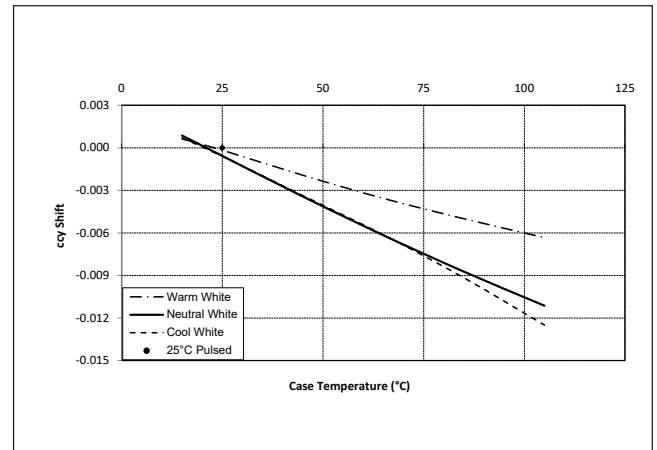


Figure 9: Typical DC ccx Shift vs. Case Temperature

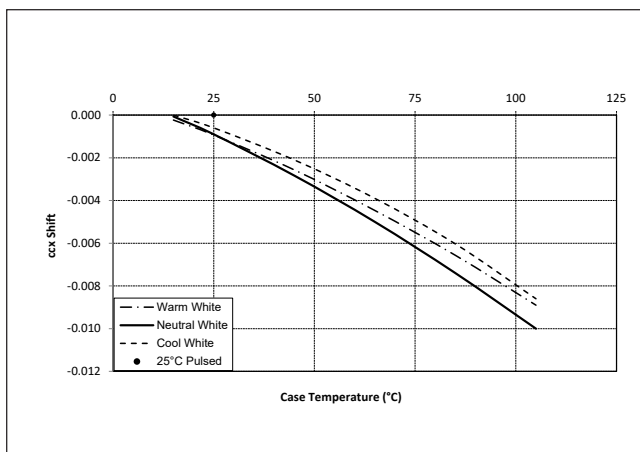

Notes for Figures 7-9:

1. Characteristics shown for warm white based on 3000K and 80 CRI.
2. Characteristics shown for neutral white based on 4000K and 80 CRI.
3. Characteristics shown for cool white based on 5000K and 70 CRI.
4. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Performance Curves

Figure 10: 2700K, 97 CRI Color Shift vs. Case Temperature¹

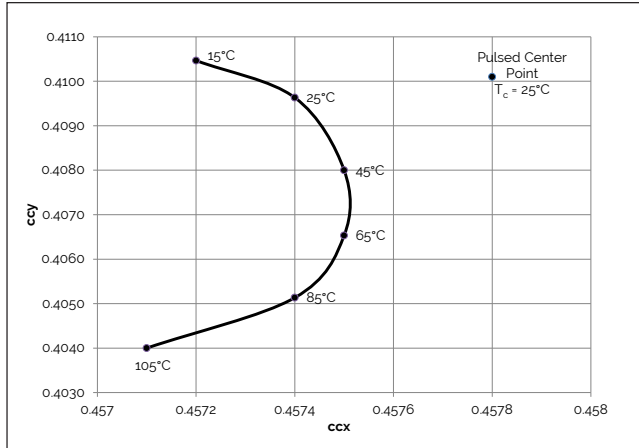


Figure 11: 3000K, 97 CRI Color Shift vs. Case Temperature¹

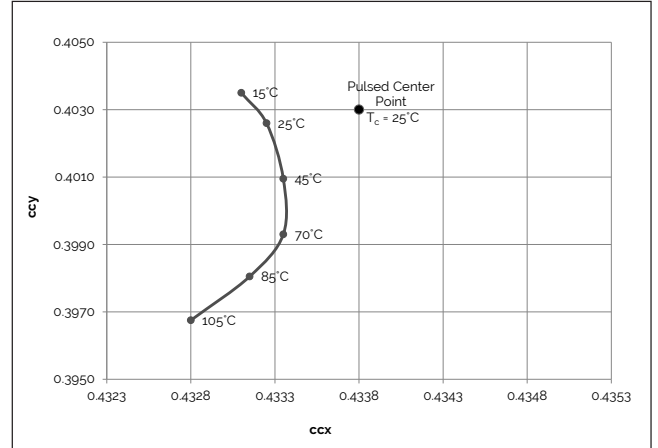


Figure 12: 3000K, 90 CRI Color Shift vs. Case Temperature¹

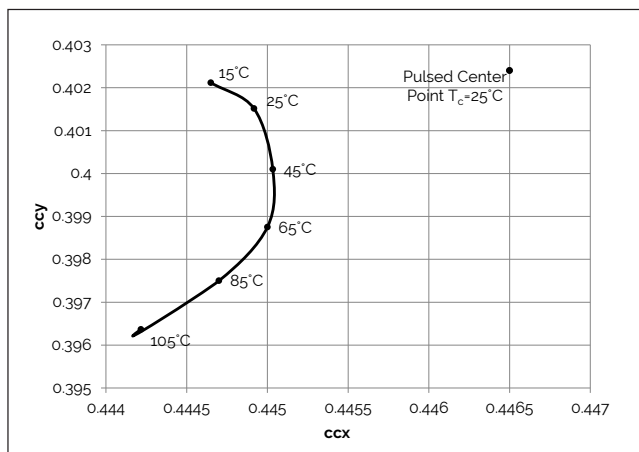


Figure 13: 3000K Class A Color Shift vs. Case Temperature¹

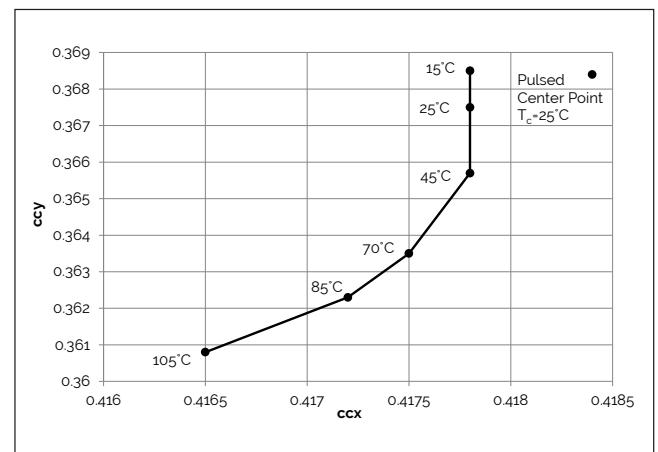


Figure 14: 3500K Class A Color Shift vs. Case Temperature¹


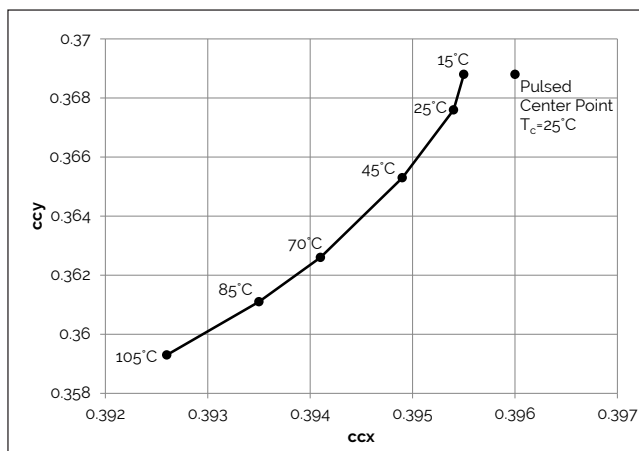


Figure 15: 4000K Class A Color Shift vs. Case Temperature¹

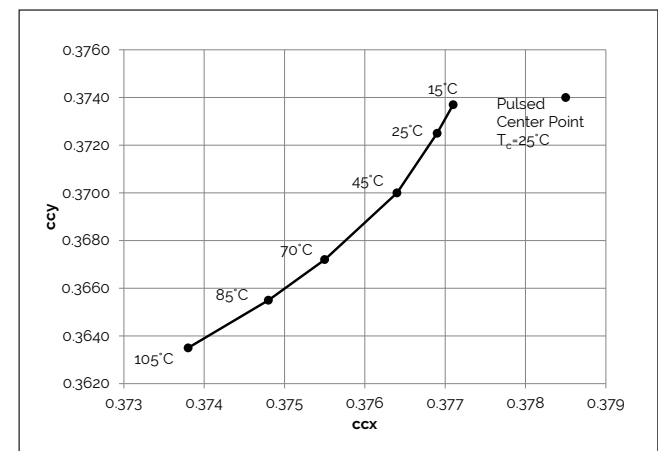


Note for Figures 10-15:

1. Measurements made under DC test conditions at the nominal drive current.
2. Typical color shift is shown with a tolerance of ± 0.002 .
3. Characteristics shown for Decor Series Showcase products, BXRC-30G200C-x-73

Typical Radiation Pattern


Figure 16: Typical Spatial Radiation Pattern

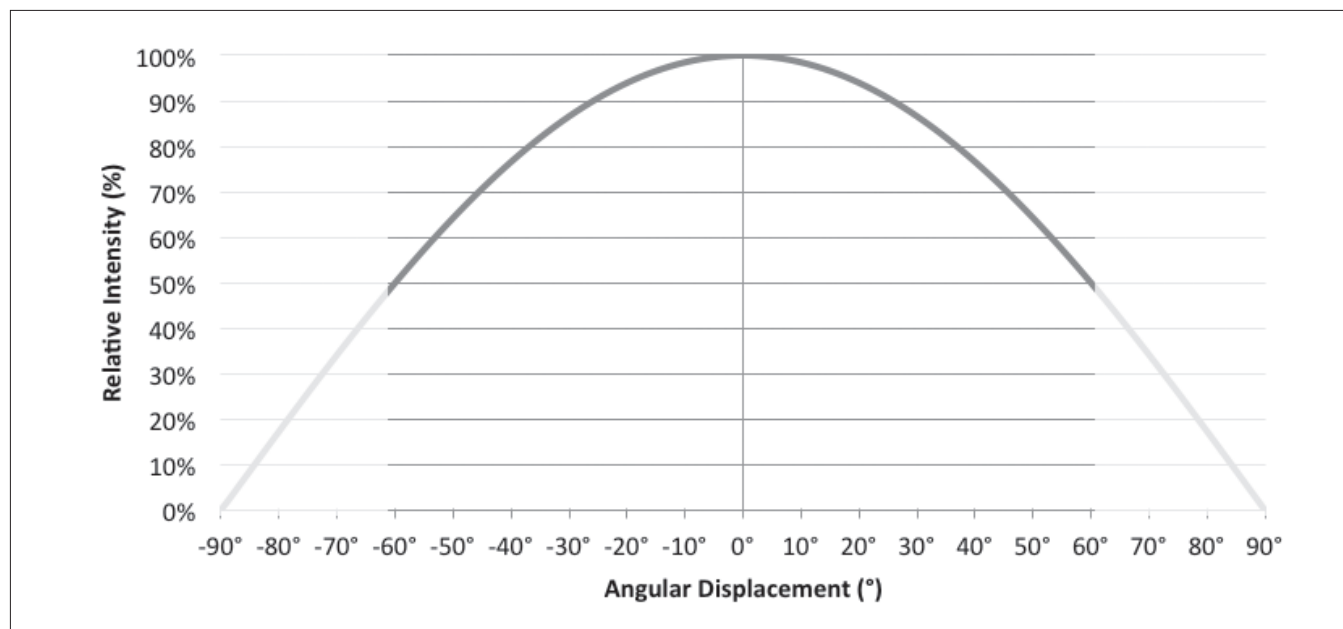

Note for Figure 16:


1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where intensity is ½ of the peak value.

Figure 17: Typical Polar Radiation Pattern

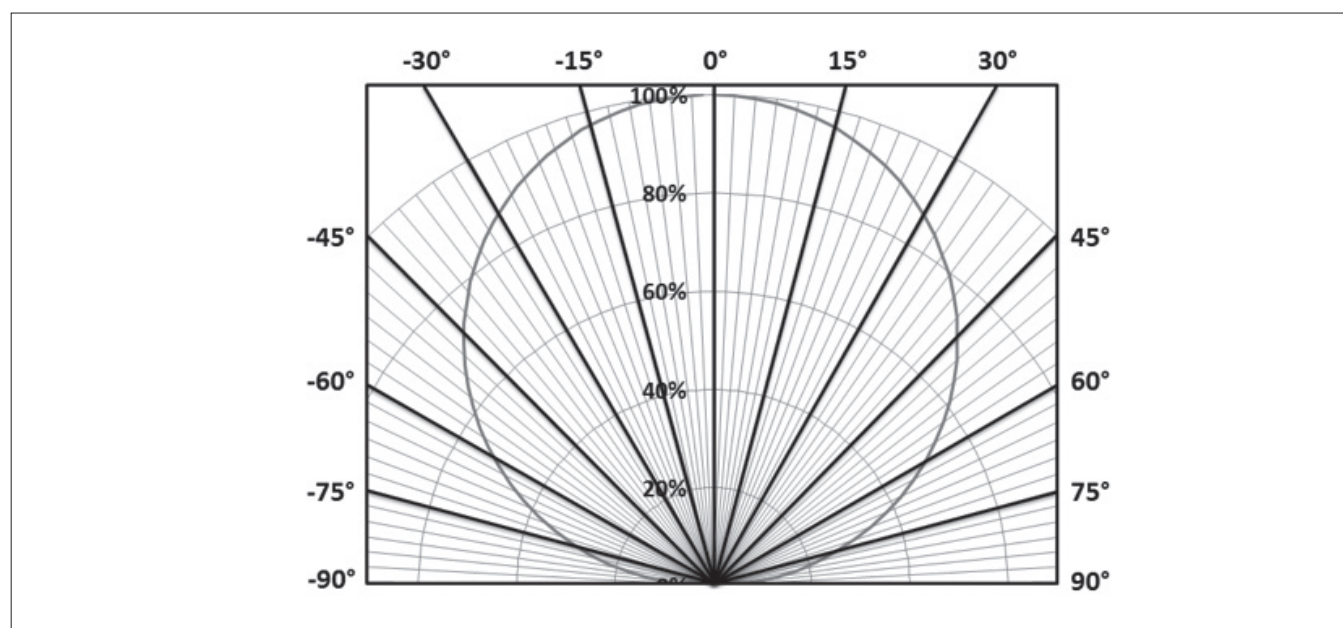

Typical Color Spectrum


Figure 18: Typical Color Spectrum

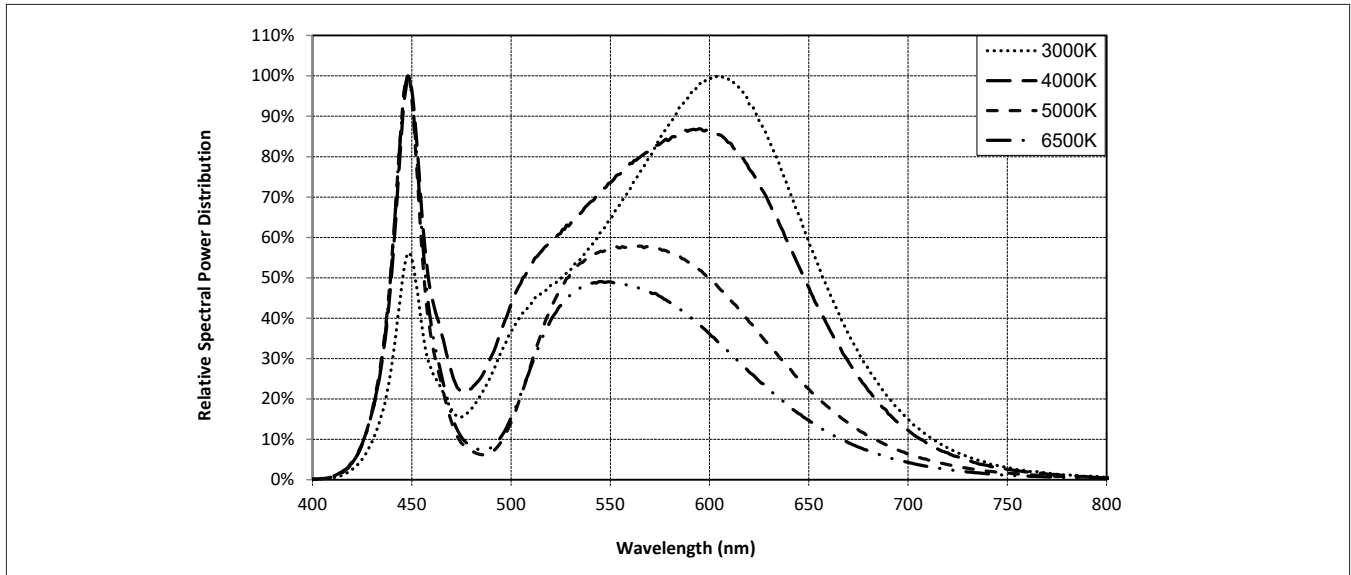

Note for Figure 18:

1. Color spectra measured at nominal current for $T_j = T_c = 25^\circ\text{C}$.
2. Color spectra shown is 3000K and 80 CRI.
3. Color spectra shown is 4000K and 80 CRI.
4. Color spectra shown is 5000K and 70 CRI.
4. Color spectra shown is 6500K and 70 CRI.

Figure 19: Typical Color Spectrum for Vero 13 with Décor Series

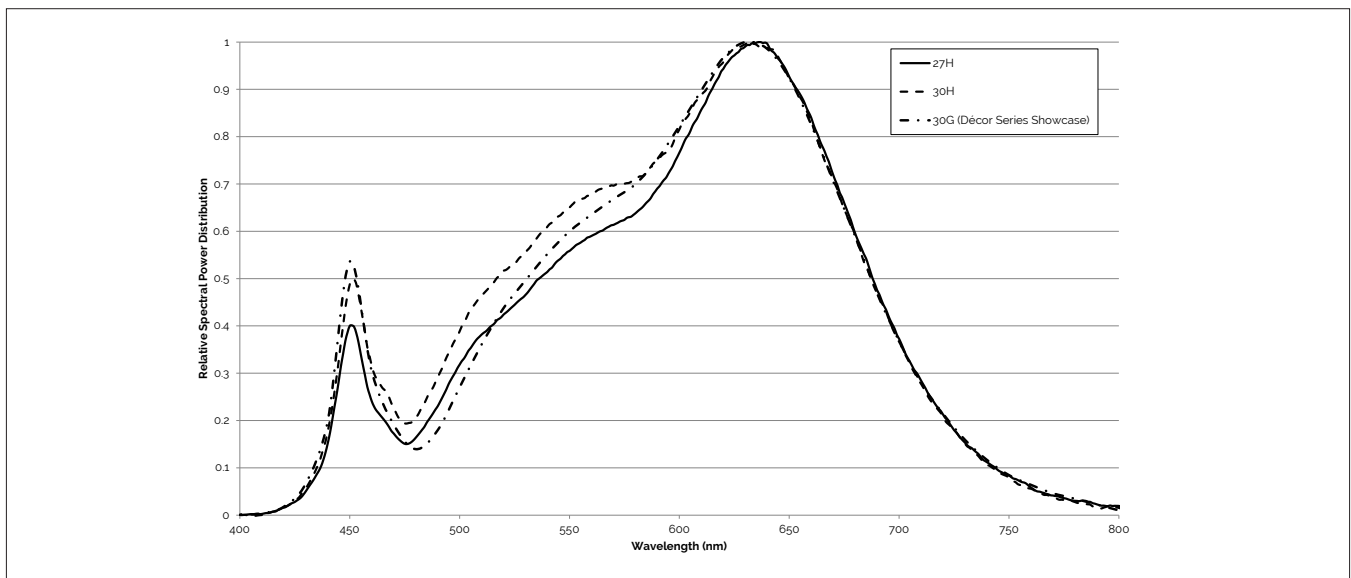


Note for Figure 19:

1. Color spectra measured at nominal current for $T_j = T_c = 25^\circ\text{C}$.

Mechanical Dimensions

Figure 20: Drawing for Vero 13 LED Array

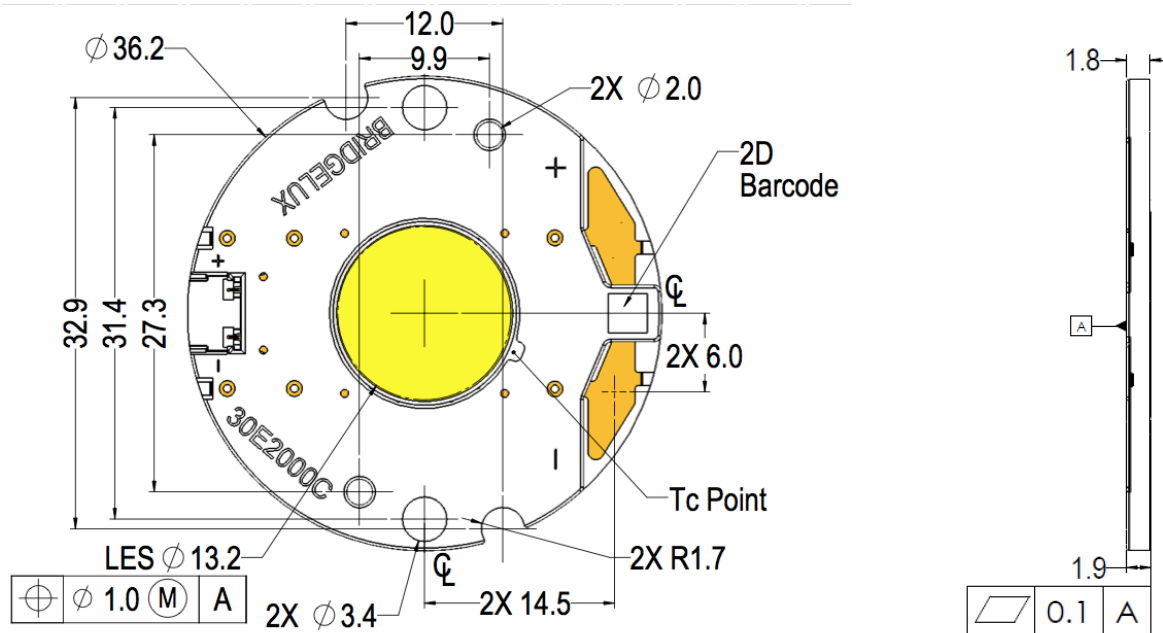


Notes for Figure 20:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are $\pm 0.1\text{mm}$.
4. Mounting holes (2X) are for M2.5 screws.
5. Bridgelux recommends two tapped holes for mounting screws with $31.4 \pm 0.10\text{mm}$ center-to-center spacing.
6. Screws with flat shoulders (pan, dome, button, round, truss, mushroom) provide optimal torque control. Do NOT use flat, countersink, or raised head screws.
7. Solder pads and connector port are labeled "+" and "-" to denote positive and negative, respectively.
8. It is not necessary to provide electrical connections to both the solder pads and the connector port. Either set may be used depending on application specific design requirements.
9. Refer to Application Notes AN30 and AN31 for product handling, mounting and heat sink recommendations.
10. The optical center of the LED Array is nominally defined by the mechanical center of the array to a tolerance of $\pm 0.2\text{mm}$.
11. Bridgelux maintains a flatness of 0.10mm across the mounting surface of the array.


Color Binning Information

Figure 21: Warm and Neutral White Test Bins in xy Color Space

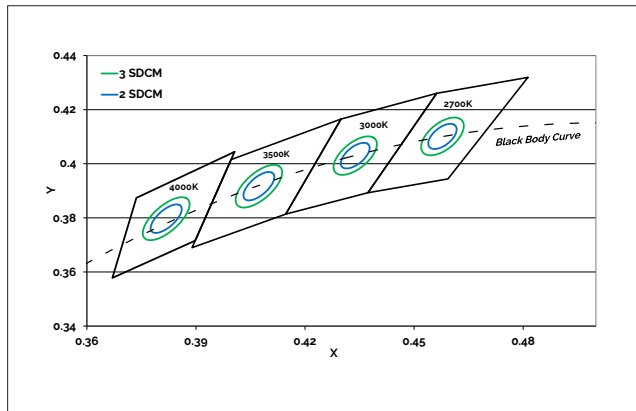

Note: Pulsed Test Conditions, $T_c = 25^\circ\text{C}$

Figure 22: Cool White Test Bins in xy Color Space

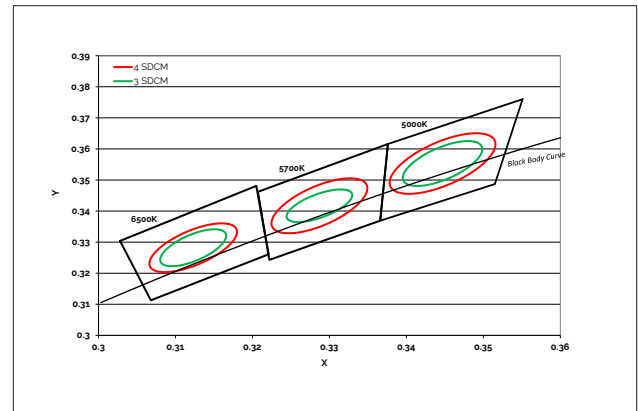

Note: Pulsed Test Conditions, $T_c = 25^\circ\text{C}$

Table 8: Warm and Neutral White xy Bin Coordinates and Associated Typical CCT

Bin Code	2700K	3000K ¹	3500K ¹	4000K ¹
ANSI Bin (for reference only)	(2580K - 2870K)	(2870K - 3220K)	(3220K - 3710K)	(3710K - 4260K)
73 (3 SDCM)	(2651K - 2794K)	(2968K - 3136K)	(3369K - 3586K)	(3851K - 4130K)
72 (2 SDCM)	(2674K - 2769K)	(2995K - 3107K)	(3404K - 3548K)	(3895K - 4081K)
Center Point (x,y)	(0.4578, 0.4101)	(0.4338, 0.403) (0.4465, 0.4024) ²	(0.4073, 0.3917)	(0.3818, 0.3797)

Note for Table 8:


- Color Binning information excludes Décor Series Class A products. Please contact your Bridgelux Sales Representative for more information.
- Center Point for Décor Series Showcase.

Table 9: Cool White xy Bin Coordinates and Associated Typical CCT (product is hot targeted to $T_c = 85^\circ\text{C}$)

Bin Code	5000K	5700K	6500K
ANSI Bin (for reference only)	(4745K - 5311K)	(5312K - 6022K)	(6022K - 7042K)
74 (4 SDCM)	(4801K - 5282K)	(5829K - 5481K)	(6270K - 6765K)
73 (3 SDCM)	(4835K - 5215K)	(5490K - 5820K)	(6250K - 6745K)
Center Point (x,y)	(0.3447, 0.3553)	(0.3287, 0.3417)	(0.3123, 0.3282)

Packaging and Labeling

Figure 23: Drawing for Vero 13 Packaging Tray

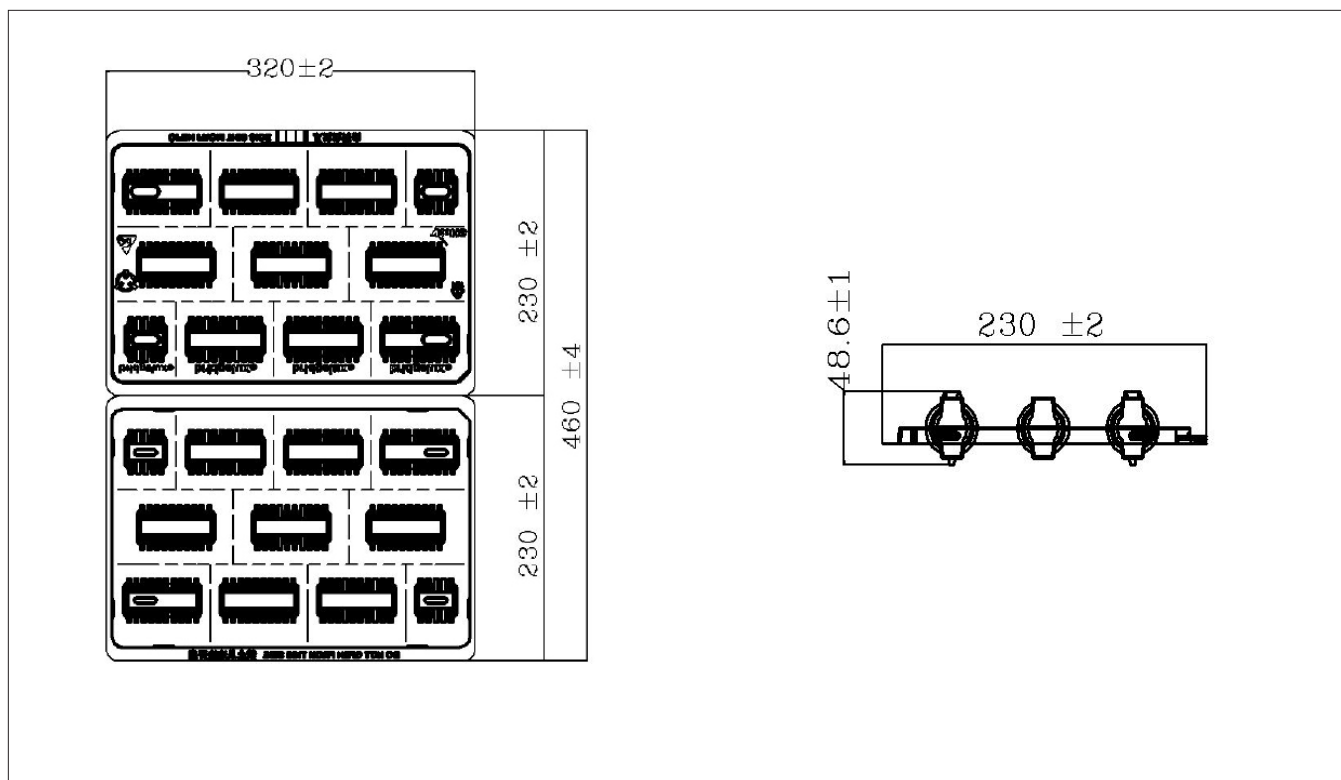


Notes for Figure 23:

1. Dimensions are in millimeters.
2. Drawings are not to scale.

Packaging and Labeling

Figure 24: Vero Series Packaging and Labeling

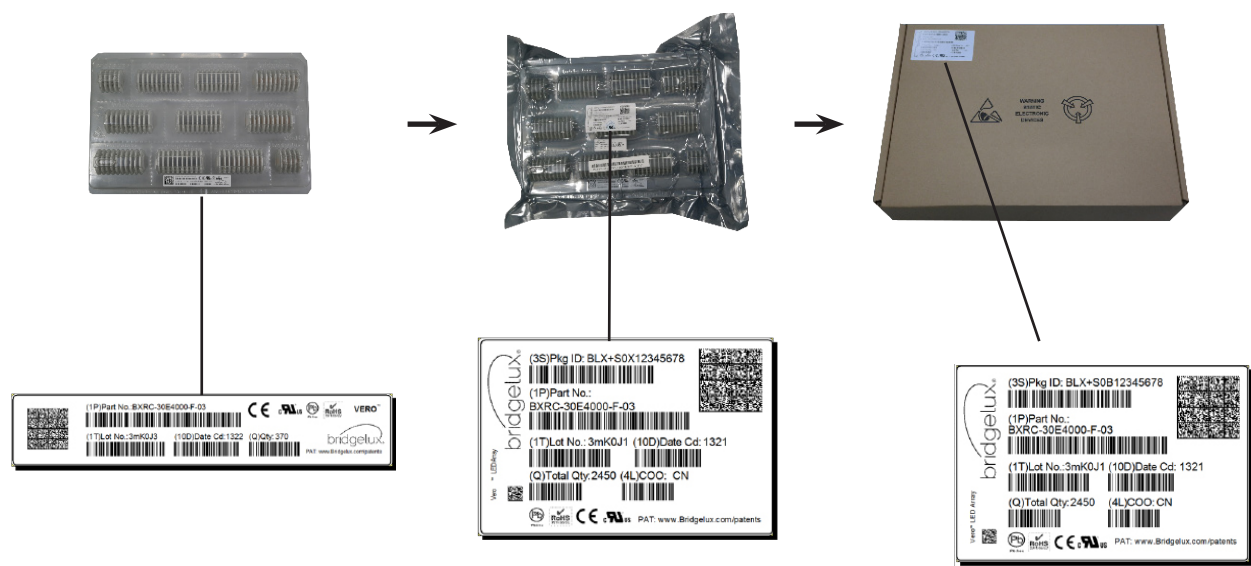

Notes for Figure 24:

1. Each tray holds 100 COBs.
2. Each tray is vacuum sealed in an anti-static bag and placed in its own box.
3. Each tray, bag and box is to be labeled as shown above.

Figure 25: Gen. 7 Product Labeling

Bridgelux COB arrays have laser markings on the back side of the substrate to help with product identification. In addition to the product identification markings, Bridgelux COB arrays also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the COB array.



Design Resources

Application Notes

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the Vero product family of LED array products. For all available application notes visit www.bridgelux.com.

Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit www.bridgelux.com.

3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux Vero LED arrays are available in both IGS and STEP formats. Please contact your Bridgelux sales representative for assistance.

LM80

LM80 testing has been completed and the LM80 report is now available. Please contact your Bridgelux sales representative for LM-80 report.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED array. Please consult Bridgelux Application Note AN31 for additional information.

CAUTION: RISK OF BURN

Do not touch the Vero LED array during operation. Allow the array to cool for a sufficient period of time before handling. The Vero LED array may reach elevated temperatures such that could burn skin when touched.

CAUTION

CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the LED array or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the LED array.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area). Optical devices may be mounted on the top surface of the plastic housing of the Vero LED array. Use the mechanical features of the LED array housing, edges and/or mounting holes to locate and secure optical devices as needed.

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, array testing is performed at the nominal drive current.

About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit

bridgelux.com

twitter.com/Bridgelux

facebook.com/Bridgelux

youtube.com/user/Bridgelux

linkedin.com/company/bridgelux-inc-_2

WeChat ID: BridgeluxInChina



46430 Fremont Boulevard

Fremont, CA 94538 U.S.A.

Tel (925) 583-8400

www.bridgelux.com