

BRIDGELUX BLUE POWER DIE

BXCD 45 mil x 45 mil

PRODUCT DATA SHEET DS-C15

The Bridgelux family of blue power die enables high performance and cost effective solutions to serve solid state lighting market. This next generation chip technology delivers improved efficiency and performance to enable increased light output for a variety of lighting, signaling and display applications.



Features

- High lumen output and efficiency
- Long operating life
- 100% Tested and sorted by wavelength, power and forward voltage
- Lambertian emission pattern
- Compatible with Solder paste, solder preform or silver epoxy die attach
- Delivered on medium tack blue tape (20cm±10mm x20 cm±10mm)

Applications

- General Illumination
- Portable Lighting
- Architectural Lighting
- Directional Lighting
- Display Backlighting
- Digital Camera Flash
- Automotive Lighting
- White LEDs

LED Chip Diagram

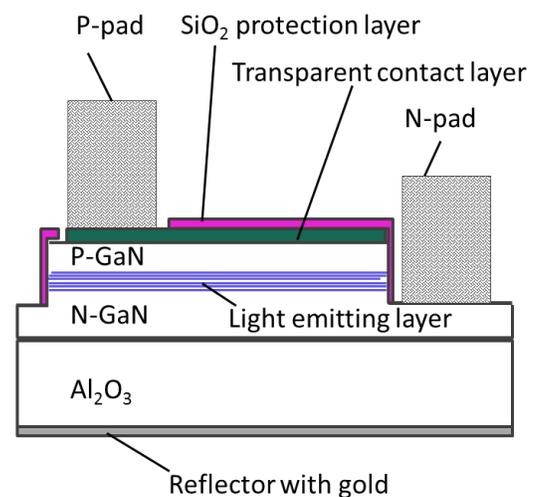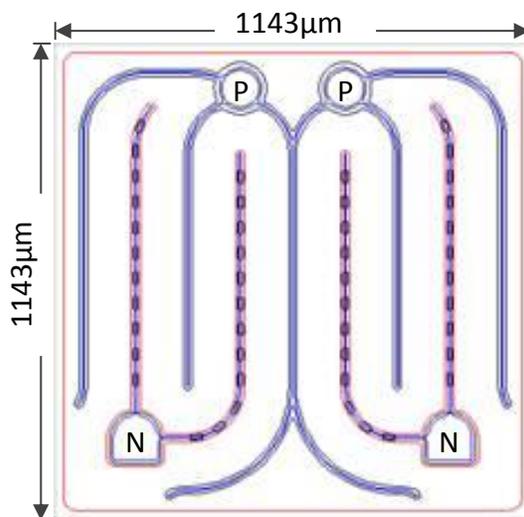

BRIDGELUX BLUE POWER DIE

BXCD 45 mil x 45 mil

Product Nomenclature

B X C D 4545 X X X - Y - Z

Where:

- BXCD: Designates product family
- 4545: Designates die size (45 mil x 45 mil)
- XXX: Designates dominant wavelength bin
- Y: Designates radiometric power bin
- Z: Designates forward voltage bin

Part Numbering and Bin Definitions

Bridgelux LED chips are sorted into the brightness and dominant wavelength bins shown below at $I_f = 350$ mA. Each blue tape contains die from only one brightness bin and one wavelength bin.

The forward voltage bins are 3.0-3.1V (A1), 3.1-3.2V (A2), 3.2-3.3 V (B1), and 3.3-3.4 V (B2). The typical forward voltage is 3.2 V and the maximum forward voltage ($V_f \text{ max}$) = 3.4 V.

Dominant Wavelength	Power Bin H1 (420 – 440 mW)	Power Bin H2 (440 – 460 mW)	Power Bin J1 (460 – 480 mW)
450 to 452.5nm	BXCD4545450-H1-z	BXCD4545450-H2-z	BXCD4545450-J1-z
452.5 to 455nm	BXCD4545452-H1-z	BXCD4545452-H2-z	BXCD4545452-J1-z
455 to 457.5nm	BXCD4545455-H1-z	BXCD4545455-H2-z	BXCD4545455-J1-z
457.5 to 460nm	BXCD4545457-H1-z	BXCD4545457-H2-z	BXCD4545457-J1-z

Dominant Wavelength	Power Bin J2 (480 – 500 mW)	Power Bin K1 (500 – 525 mW)
450 to 452.5nm	BXCD4545450-J2-z	BXCD4545450-K1-z
452.5 to 455nm	BXCD4545452-J2-z	BXCD4545452-K1-z
455 to 457.5nm	BXCD4545455-J2-z	BXCD4545455-K1-z
457.5 to 460nm	BXCD4545457-J2-z	BXCD4545457-K1-z

Note: z = "A1" for Vf bin of 3.0-3.1V; z = "A2" for Vf bin of 3.1-3.2V; z = "B1" for Vf bin of 3.2-3.3V; z = "B2" for Vf bin of 3.3-3.4V

BRIDGELUX Blue Power Die

BXCD 45 mil x 45 mil

Mechanical Dimensions

Chip Size	1143(+30/-15) μm x 1143(+30/-15) μm (45 mil x 45 mil)
Chip Thickness	150 \pm 10 μm (5.9 mil)
Au Pad Thickness	3.0 \pm 0.5 μm
Au Pad Diameter	P Pad (2X): 100 \pm 5 μm N Pad (2X): 100 \pm 5 μm

Absolute Maximum Ratings

Parameter	Symbol	Maximum Rating	Condition
DC Forward Current	I_f	700 mA ¹	$T_j = 140^\circ\text{C}$
Forward Voltage	V_f	3.4 V	$I_f = 350\text{ mA}$
Junction Temperature	T_j	150 $^\circ\text{C}$	
Reverse Voltage	V_r	-5 V	$T_a = 25^\circ\text{C}$
Reverse Current	I_r	2.0 μA	$V_r = -5\text{ V}$
Optical Power (minimum)	P_0	340 mW	$I_f = 350\text{ mA}$
Assembly Process Temperature		325 $^\circ\text{C}$ for < 5 seconds	
Storage Conditions (chip on tape) ⁶		0 $^\circ\text{C}$ to +40 $^\circ\text{C}$ ambient, RH < 65%	

Notes:

1. Maximum drive current depends on junction temperature, die attach methods/materials, and lifetime requirements of the application.
2. Bridgelux LED chips are Class 1 ESD sensitive.
3. The typical spectra half-width of the BXCD4545 blue power die is < 25 nm.
4. Please consult the Bridgelux technical support team for information on how to optimize the light output of our chips in your package.
5. Brightness values are measured in an integrating sphere using gold plated TO39 headers without encapsulation.
6. Tapes should be stored in a vertical orientation, not horizontally stacked. Stacking of tapes can place excessive pressure on the bond pads of the LED, resulting in reduced wire bonding strength.

BRIDGELUX BLUE POWER DIE

BXCD 45 mil x 45 mil

Environmental Compliance

Bridgelux is committed to providing environmentally friendly products to the solid state lighting market. Bridgelux BXCD4545 blue power die are compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS directive. Bridgelux will not intentionally add the following restricted materials to BXCD4545 die products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

BRIDGELUX BLUE POWER DIE

BXCD 45 mil x 45 mil

Performance vs. Current

The following curves represent typical performance of the BXCD4545 blue power die. Actual performance will vary slightly for different power, dominant wavelength and Vf bins.

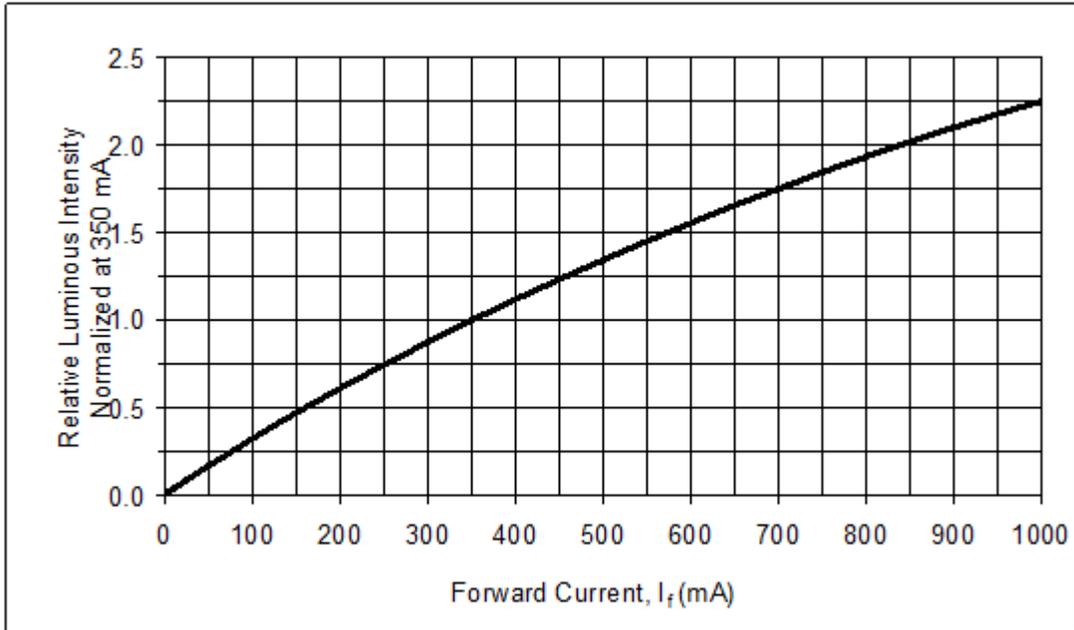


Figure 1: Relative Luminous Intensity vs. Forward Current ($T_j = 25^\circ\text{C}$)

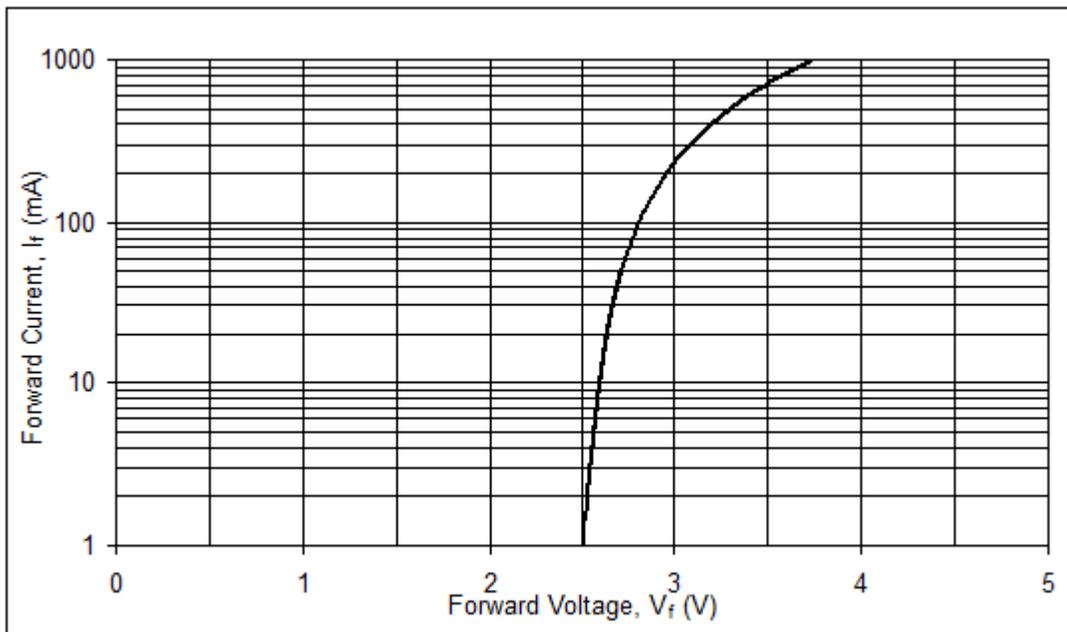


Figure 2: Forward Current vs. Forward Voltage ($T_j = 25^\circ\text{C}$)

BRIDGELUX BLUE POWER DIE

BXCD 45 mil x 45 mil

Performance vs. Junction Temperature

The following curves represent typical performance of the BXCD4545 blue power die. Actual performance will vary slightly for different power, dominant wavelength and Vf bins.

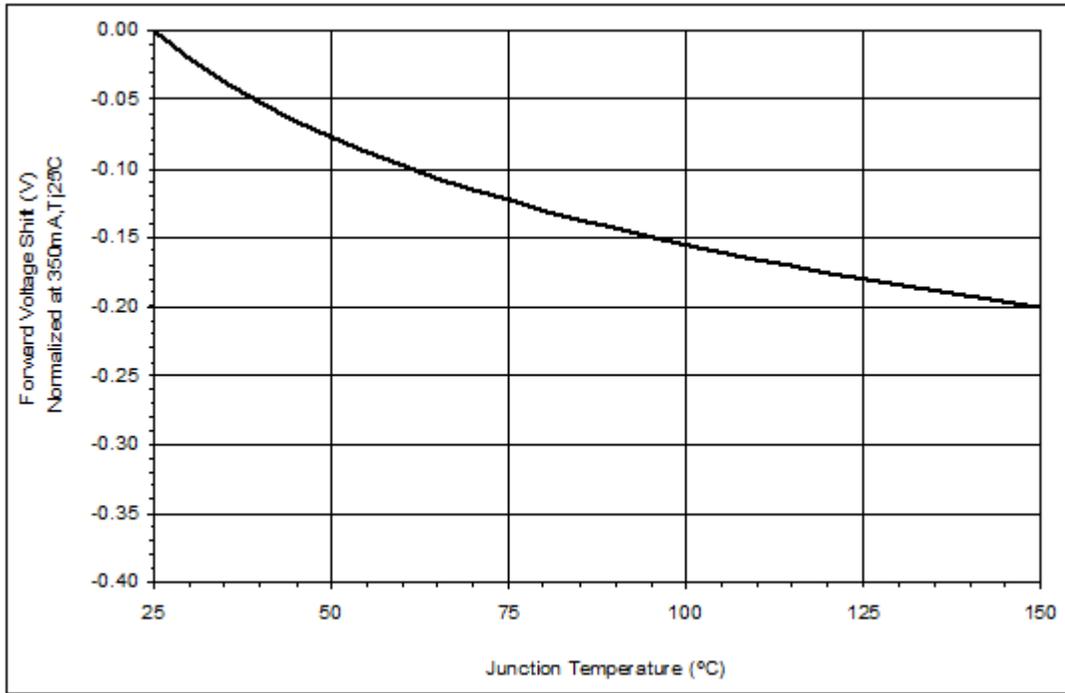


Figure 3: Forward Voltage Shift vs. Junction Temperature

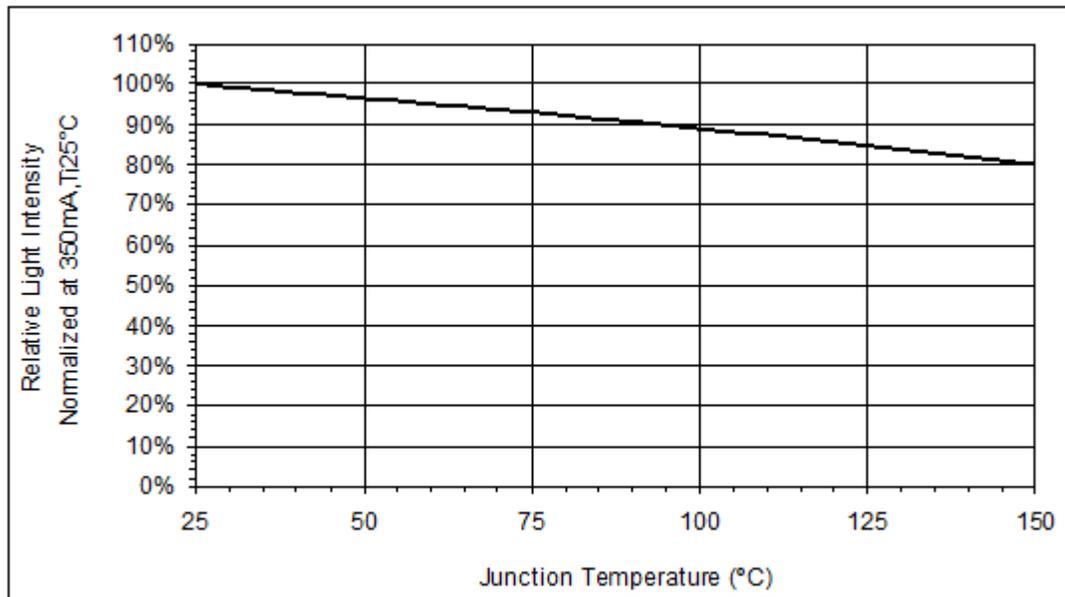


Figure 4: Relative Light Intensity vs. Junction Temperature

BRIDGELUX BLUE POWER DIE

BXCD 45 mil x 45 mil

Wavelength Shift

The following curves represent typical performance of the BXCD4545 blue power die. Actual performance will vary slightly for different power, dominant wavelength and Vf bins.

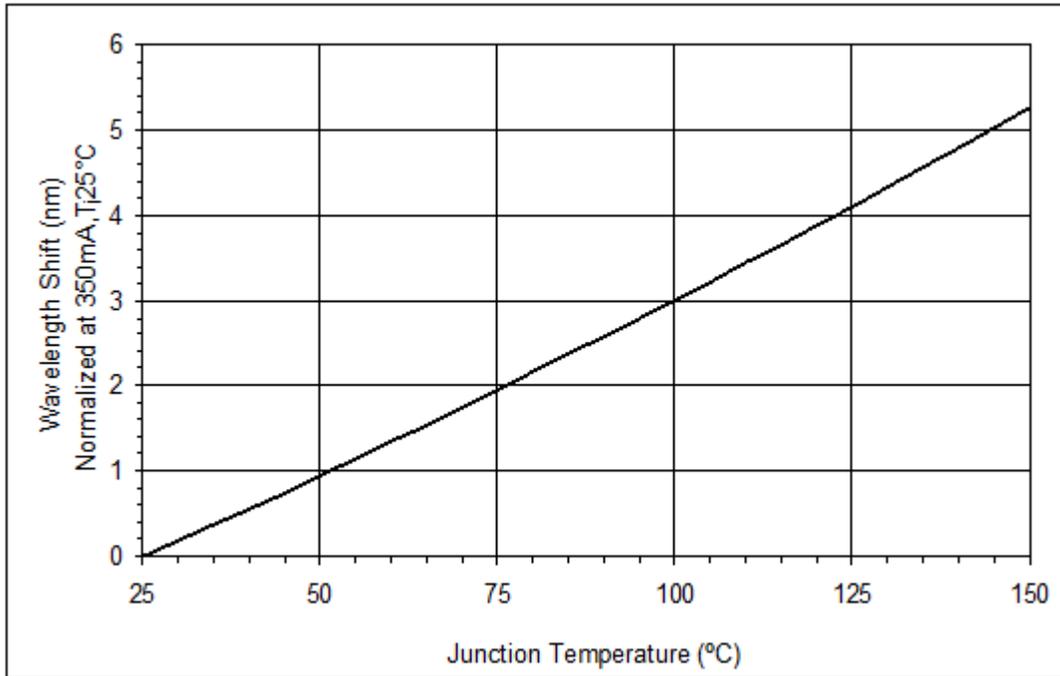


Figure 5: Wavelength Shift vs. Junction Temperature

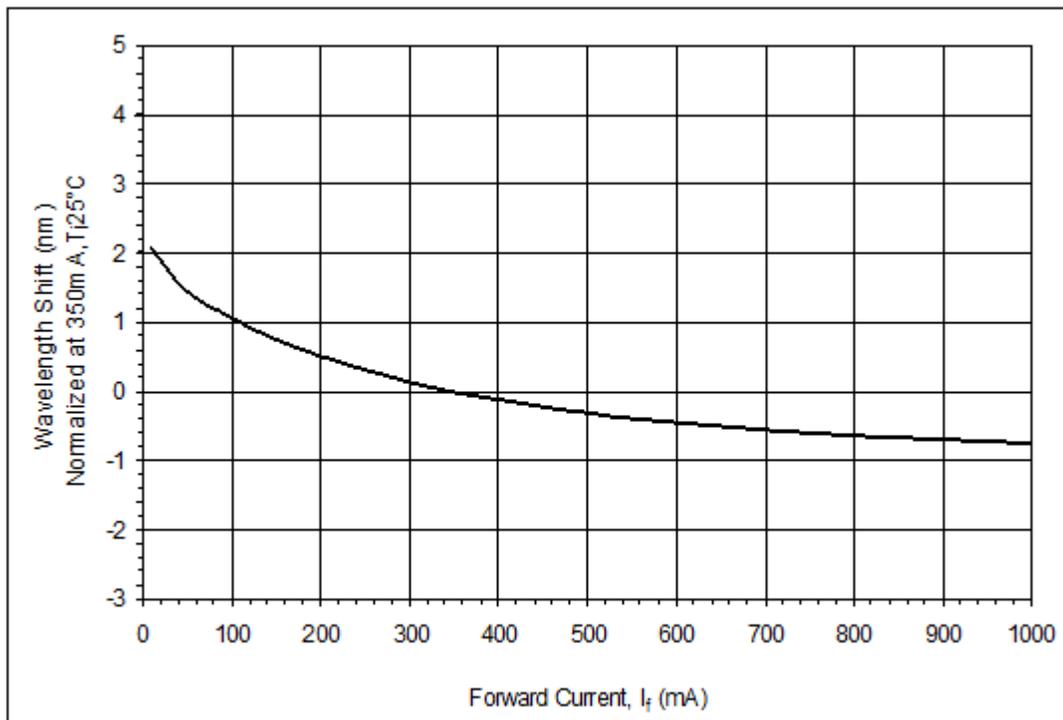


Figure 6: Wavelength Shift vs. Forward Current

BRIDGELUX BLUE POWER DIE

BXCD 45 mil x 45 mil

Typical Radiation Pattern

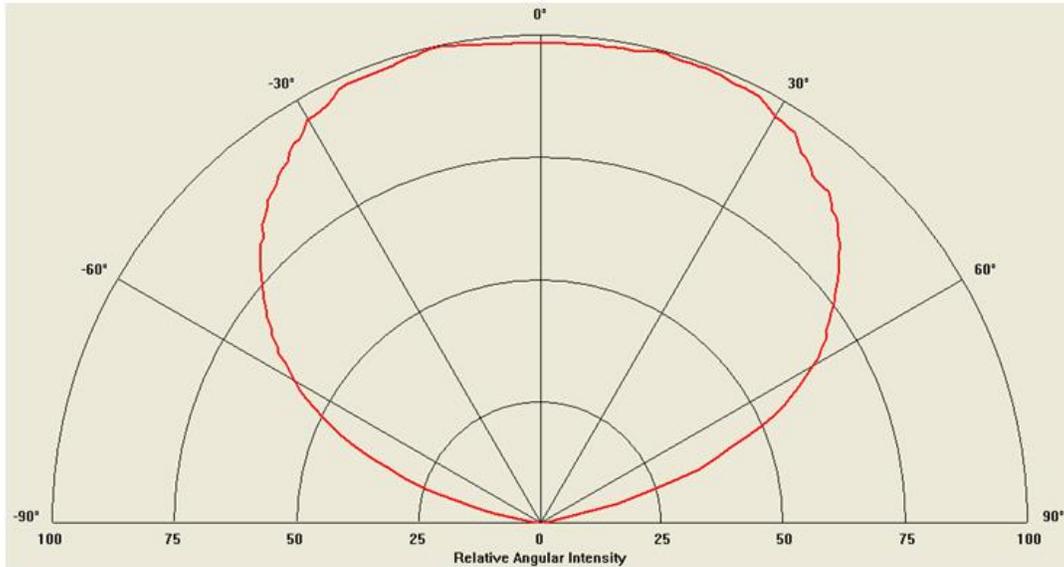


Figure 7: Typical Radiation Pattern (350 mA Operation)

Current De-rating Curves

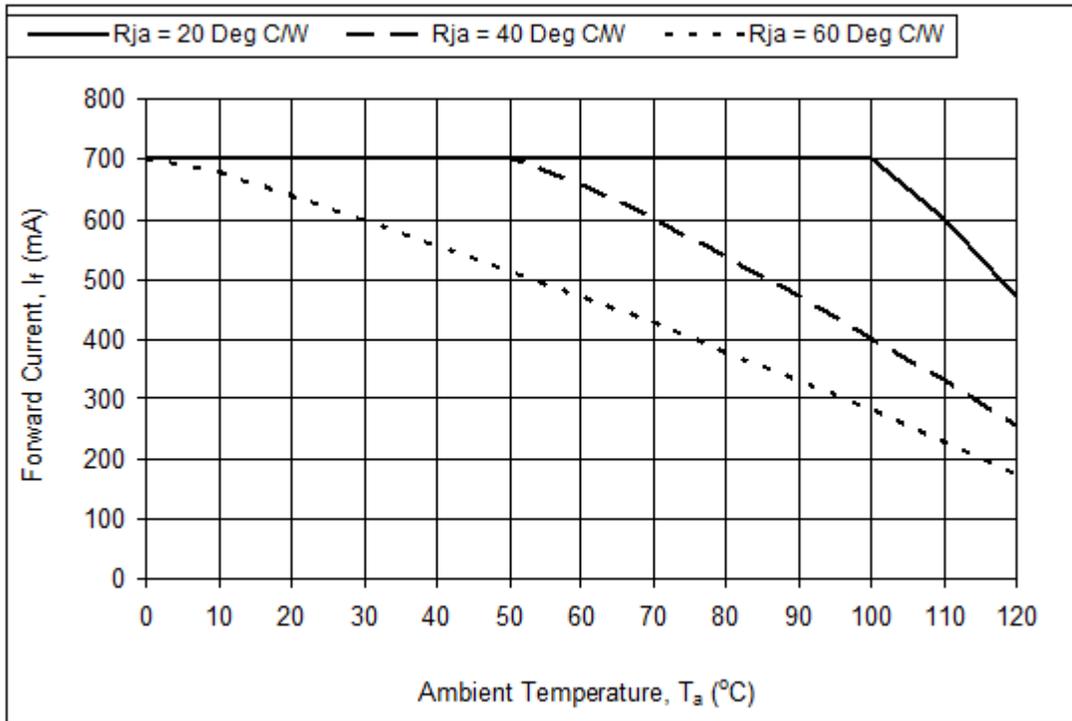


Figure 8: Current Derating Curve vs. Ambient Temperature (derating based on T_j max 150°C)

BRIDGELUX BLUE POWER DIE

BXCD 45 mil x 45 mil

About Bridgelux

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit

bridgelux.com

twitter.com/Bridgelux

facebook.com/Bridgelux

linkedin.com/company/Bridgelux-inc-_2

WeChat ID: BridgeluxInChina

© 2019 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice.