

Pallas-D


Bridgelux Differentiation

- It's in our DNA is to solve customers' problems
- 15+ years of driving lighting market transformation
- Vertically integrated global supply chain
- Strategic focus on the simplification of human centric lighting systems



What is Pallas-D?

- A family of specifier grade Constant Current LED drivers with deep and smooth dimming performance via DALI-2 standard
- Brick and linear form factor best fit for various lighting applications
- Various power options (12W to 75W) to cover different applications
- DIP-Switches configurable output currents aimed for maximized flexibility and ease of use
- Flicker free per IEEE P1789, EU2019/2020 (ErP)
- Built-in over-voltage, over-temperature and short circuit protection

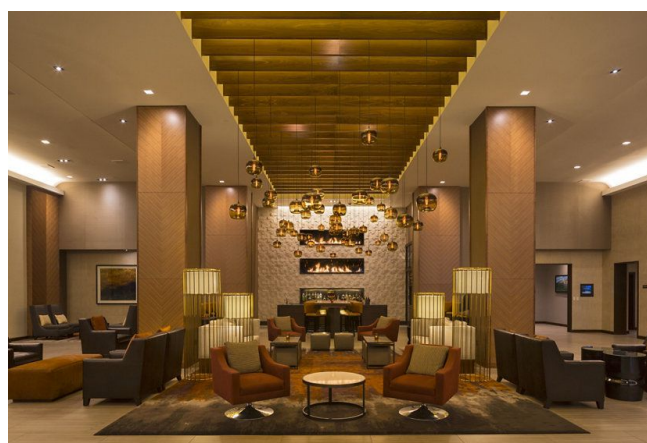

Pallas-D Drivers Parameters	BXDR-PS-12BS- E105D-01-A	BXDR-PS-25BS- E107D-01-A	BXDR-PS-45BS- E110D-01-A	BXDR-PS-45BS- E116D-01-A	BXDR-PS-75BS- E116D-01-A	BXDR-PS-45LS- E110D-01-A	BXDR-MS-45LT- E110D-01-A	BXDR-MS-75LT- E116D-01-A
Power	12W	25W	45W	45W	75W	45W	45W	75W
Inputs (AC/DC)	220-240Vac 176-370Vdc	220-240Vac 176-370Vdc	220-240Vac 176-370Vdc	220-240Vac 176-370Vdc	220-240Vac 176-370Vdc	220-240Vac 176-370Vdc	220-240Vac 176-370Vdc	220-240Vac 176-370Vdc
Output Current (mA) (7 / 8 steps)	180/230/ 260/300/ 350/400/ 450/500	260/350/ 400/450/ 500/550/ 600/700	350/500/ 600/700/ 800/900/ 1050	1050/1150/ 1200/1300/ 1400/1500/ 1500/1600	1050/1150/ 1200/1300/ 1400/1500/ 1500/1600	350/500/ 600/700/ 800/900/ 1050	350/500/ 600/700/ 800/900/ 1050	1050/1150/ 1200/1300/ 1400/1500/ 1500/1600
Output Voltage	18 - 54V	20 - 60V	25 - 70V	14 - 43V	25 - 71V	20-50V	25 - 70V	25 - 71V
Efficiency (@ Full Load)	>79%	>86%	>87%	>87%	>89%	>87%	>87%	>89%
Dimming Control	DALI-2	DALI-2	DALI-2	DALI-2	DALI-2	DALI-2	DALI-2	DALI-2
Ambient Temperature	-20°C to + 50°C	-20°C to + 50°C	-20°C to + 50°C	-20°C to + 50°C	-20°C to + 40°C	-20°C to + 50°C	-20°C to + 50°C	-20°C to + 50°C
Connection	Terminal Blocks	Terminal Blocks	Terminal Blocks	Terminal Blocks	Terminal Blocks	Terminal Blocks	Terminal Blocks	Terminal Blocks
Dimensions (mm)	119 x 52 x 22.5 (Strain Relief)	119 x 52 x 22.5 (Strain Relief)	135 x 72 x 24 (Strain Relief)	135 x 72 x 24 (Strain Relief)	159 x 79 x 30 (Strain Relief)	320 x 35 x 23 (Strain Relief)	280 x 31.5 x 22	360 x 31 x 21.5

Pallas-D Wireless Platform (Upcoming)



CASAMBI BLE Control



BXCS-12C-N2A-01-A
75 x 32 x 20mm (L x W x H)

