## **30V 4A N-Channel Enhancement Mode Power MOSFET**

#### **General Description**

This Power MOSFET has been developed using advanced trench process, which is specifically designed to minimize input capacitance and gate charge. This renders the device suitable for use as primary switch in advanced high-efficiency isolated DC-DC converters for telecom and computer applications, and applications with low gate charge driving requirements.

#### FEATURES

- RDSON≤42m Ω @Vgs=10V, Id=4A
- Excellent RDS(ON) and Low Gate Charge
- Lead free product is acquired

#### SYMBOL





SOT-23 top view

#### ASSEMBLY MESSAGE

Product Name	Marking	Package	Packaging
BXT420N03M	3402A	SOT-23	Reel

#### ABSOLUTE MAXIMUM RATINGS (Tc=25°C unless otherwise noted)

Parameter			Symbol	Rating	Unit
				SOT-23	
Drain-Source Voltage			VDSS	30	V
Drain Current	Con	tinuous (T <sub>C</sub> = 25°C)	1-	4	А
Drain Current	Con	tinuous (T <sub>C</sub> = 100°C)	Ι <sub>D</sub>	2.6	А
Drain Current Pulsed (Note1)		Ідм	16	А	
Gate-Source Voltage			V <sub>GSS</sub>	±12	V
Power Dissipation T <sub>C</sub> =25°C		PD	1.1	W	
Maximum Junction Temperature			TJ	150	°C
Storage Temperature Range			Tstg	-55 to 150	°C

Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature



#### THERMAL CHARACTERISTICS

Parameter	Symbol	Max.	Unit	
Farameter	Symbol	SOT-23		
Thermal Resistance, Junction-to- Ambient	Reja	113.6	°C / W	

#### **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub>=25°C, unless otherwise Noted)


Parameter	Symbol	Test Condition	Min.	Тур.	Max.	Unit
OFF CHARACTERISTICS					•	
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	VGS=0V, ID=250µA	30			V
Zero Gate Voltage Drain Current	IDSS	VDS=30V, VGS=0V			1	uA
Gate-Body Leakage Current, Forward		VGS=12V			100	nA
Gate-Body Leakage Current, Reverse	I <sub>GSS</sub>	VGS=-12V			-100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	Vgs(th)	VDS=VGS, ID=250µA	0.5	0.9	1.4	V
Drain-Source On-State Resistance	Brazau	VGS=10V, ID=4A		32	42	mΩ
	Rds(on)	VGS=4.5V, ID=3A		36	48	mΩ
		VGS=2.5V, ID=2A		50	70	mΩ
DYNAMIC PARAMETERS						
Input Capacitance	Ciss	VDS=15V, VGS=0V,		280		pF
Output Capacitance	Capacitance Coss			32		pF
Reverse Transfer Capacitance	C <sub>RSS</sub>	f=1.0MHz		26		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time	t <sub>D(ON)</sub>			16		ns
Turn-ON Rise Time	t <sub>R</sub>	VDD=15V, ID=2A, VGS =		42		ns
Turn-OFF Delay Time	$t_{D(OFF)}$	4.5V, RG=3Ω		17		ns
Turn-OFF Fall-Time	t <sub>F</sub>			10		ns
Total Gate Charge(Note2)	$Q_{G}$	VDS =15V, VGS =4.5V, ID		2.7		nC
Gate Source Charge	Q <sub>GS</sub>	=4A		0.7		nC
Gate Drain Charge	$Q_{GD}$	-47		0.9		nC
SOURCE- DRAIN DIODE RATINGS	AND CHAR	ACTERISTICS				
Drain-Source Diode Forward Voltage	Vsd	IS=4A, VGS=0V			1.2	V
Diode Continuous Forward Current	ls				4	А
Maximum Pulsed Drain to Source Diode Forward Current	lsм				16	A

Note: 2. Essentially independent of operating temperature



#### BXT420N03M


#### **TYPICAL CHARACTERISTICS**

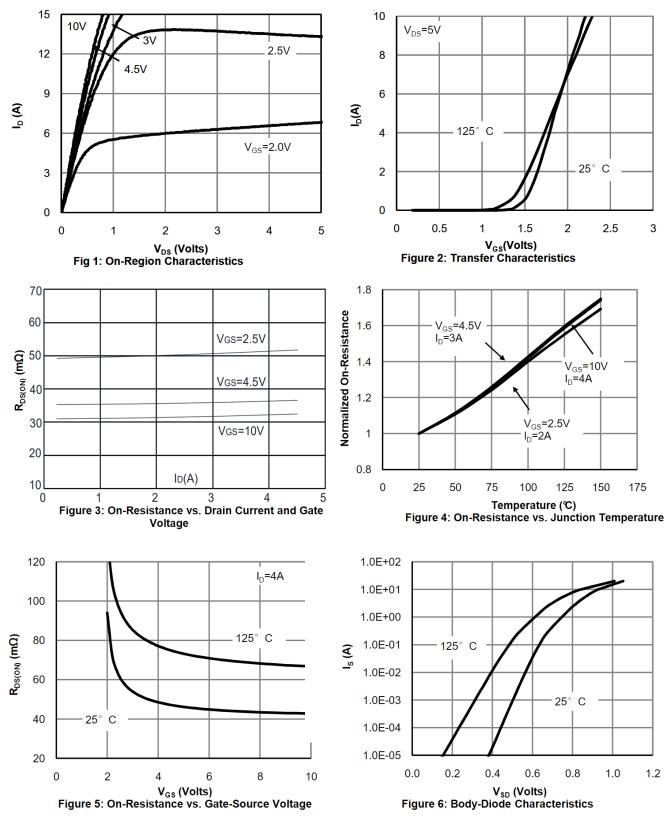



### BXT420N03M

#### **TYPICAL CHARACTERISTICS(Cont.)**

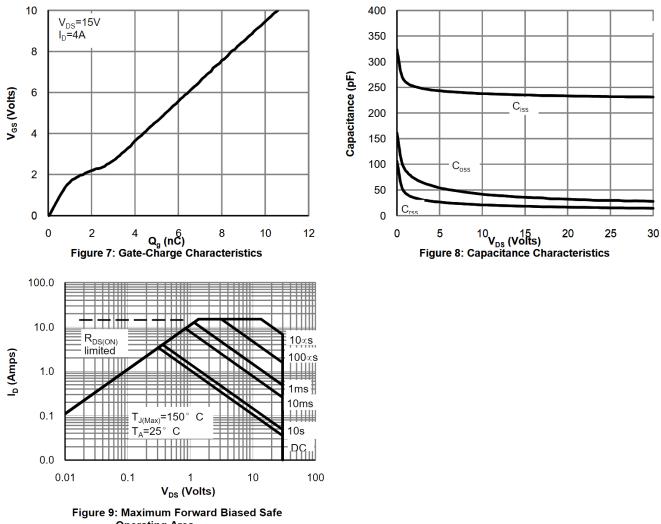


**Operating Area** 




### BXT420N03M


### **TEST CIRCUITS AND WAVEFORMS**



Gate Charge Test Circuit



Gate Charge Waveform

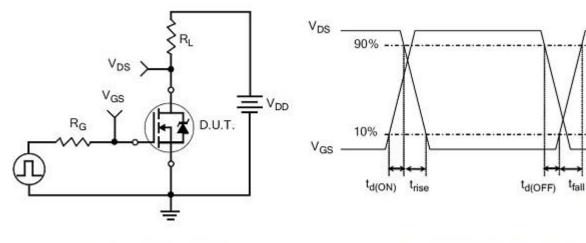


Resistive Switching Test Circuit

Resistive Switching Waveforms




#### **TEST CIRCUITS AND WAVEFORMS(Cont.)**

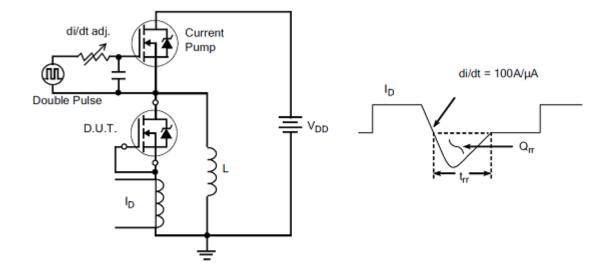

Diode Reverse Recovery Test Circuit

Diode Reverse Recovery Waveform

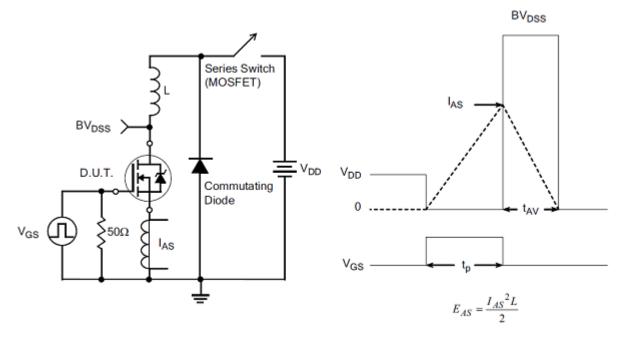


Unclamped Inductive Switching Test Circuit

Unclamped Inductive Switching Waveforms



## SOT-23 Package

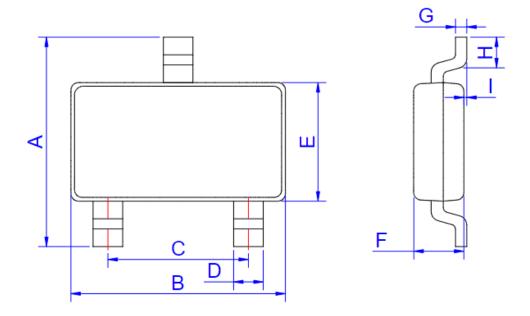

SOT-23

	Dimensions						
Ref.	Millin	neters	Inches				
	Min.	Max.	Min.	Max.			
А	2.250	2.550	0.089	0.100			
В	2.800	3.000	0.110	0.118			
С	1.800	2.000	0.071	0.079			
D	0.300	0.500	0.012	0.020			
E	1.200	1.400	0.047	0.055			
F	0.900	1.150	0.035	0.045			
G		0.200		0.008			
Н	0.200		0.008				
I	0.000	0.150	0.000	0.006			



## **Revision history**

## Document revision history

Date	Revision	Changes
18-Nov-2020	1.0	First release

# bridgelux. Bridgelux WuXi R&D CO., LTD

#### **Disclaimers:**

Bridgelux WuXi has made reasonable commercial efforts to ensure that the information given in this data sheet is correct. However, it must clearly be understood that such information is for guidance only and does not constitute any representation or form part of any offer or contract.

For documents and material available from this data sheet, Bridgelux WuXi does not warrant or assume any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, product, technology or process disclosed hereunder.

Bridgelux WuXi reserves the rights to at its own discretion to make any changes or improvements to this data sheet. Unless said data sheet is incorporated into the formal contract, any customer should not rely on the information as any specification or product parameters duly committed by Bridgelux WuXi. Customers are hereby advised to verify that the information contained herein is current and complete before the entering of any contract or acknowledgement of any purchase order. Accordingly, all products specified hereunder shall be sold subject to Bridgelux WuXi's terms and conditions supplied at the time of order acknowledgement. Except where agreed upon by contractual agreement, testing of all parameters of each product is not necessarily performed.

Bridgelux WuXi does not warrant or convey any license either expressed or implied under its patent rights, nor the rights of others. Reproduction of information contained herein shall be only permissible if such reproduction is without any modification or alteration. Reproduction of this information with any alteration is an unfair and deceptive business practice. Bridgelux WuXi is not responsible or liable for such altered documentation.

Resale of Bridgelux WuXi's products with statements different from or beyond the parameters stated by Bridgelux WuXi for that product or service voids all express or implied warrantees for the associated Bridgelux WuXi's product or service and is unfair and deceptive business practice. Bridgelux WuXi is not responsible or liable for any such statements.

Bridgelux WuXi's products are not authorized for use as critical components in life support devices or systems without the express written approval of Bridgelux WuXi. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.